



TruVu

# i-Vu® Building Automation System

## TV-UCXP683T-V

### Expandable Universal Controller



The TruVu™ Expandable Universal Controller is ideal for HVAC equipment control, advanced air quality control and most zone-level applications. The TV-UCXP683T-V features a built-in flow sensor, dual Ethernet ports with built-in fail-safe that supports direct connection or daisy chain topologies using BACnet/IP and 17 points of onboard control. Designed to operate in a wide range of environmental conditions, it is well suited for mechanical rooms, equipment boxes, or almost any other weather-tight location.



#### Application Features

- Versatile controller suitable for a variety of applications, including: small AHUs, fan coils, exhaust fans
- Standard library of control programs available for most unitary equipment and zone applications
- Supports Snap graphical programming software
- Supports Carrier communicating sensors, which are available in a variety of zone and equipment sensing combinations
- Supports Carrier TruVu touchscreen interfaces for managing and troubleshooting the connected equipment easily and for occupant engagement
- Supports live, visual displays of control logic, which uses real time operational data and aids in optimizing and troubleshooting system operations
- Supports 50 Modbus points for system integrations

#### Hardware Features

- Dual 10/100 Mbps, BACnet IP and IP addressing
- Supports home run, daisy chain and ring IP network topologies
- Capacitor-backed real-time clock keeps time in the event of power failure or network interruption for at least three days
- Integral airflow sensor
- I/O expander bus supports one TV-UCXP IO Expander
- USB port for local device updates, hard-wired, and wireless service connections
- DIN rail or screw mounting

#### System Features

- Connects seamlessly to the i-Vu building automation system

# i-Vu Building Automation System

## TV-UCXP683T-V



### Specifications

<b>BACnet Conformance</b>		Conforms to the BACnet Advanced Application Controller (B-AAC) and BACnet Broadcast Management Device (B-BBMD) standard device profiles, as defined in BACnet 135-2001 2012 Annex L Protocol Rev 14
<b>Power</b>		24Vac +/- 15% , 50 - 60Hz, 55VA   24Vdc +/- 10%, 20W. (80VA / 35W if Act Net devices are connected)
<b>Communication</b>		<div>BAS Primary portDual 10/100 BaseT Ethernet ports with built-in fail safe, supporting direct connection or daisy chain topology natively using BACnet/IP (non-routing)</div> <div>Serial port 1RS-485 port for communication with third party devices (up to 50 points). Network at 9,600 to 115,200 bps.</div> <div>I/O Bus portSupports one TV-UCXP I/O expander</div> <div>Rnet port12Vdc @ 260mA Supports the following: Up to 5 ZS sensors (freely mix ZS zone, ZS duct, ZS immersion and ZS outdoor sensors), iVu Equipment Touch, or TruVu ET Displays (external power required)</div> <div>Act Net portSupports up to 5 Act Net communicating devices such as the i-Vu Smart Valves and Smart Damper Kit</div> <div>USB Service portFor TruVu ET Display support   configuration   wireless service access   firmware updates and controller recovery via USB drive   TruVu ET Displays</div> <div>USB Expansion portFor support of comm expansion devices</div>
<b>Inputs</b>		<div>Universal8 Universal Inputs configurable to any of the following: Dry   Pulse Counting   Thermistor   0-10 Vdc</div> <div>Auxiliary Power24Vdc @ 100mA total current capacity</div>
<b>Integral Airflow Sensor</b>		Precision differential pressure sensor 0-2 in. H2O, sensitive down to ±0.001 in. H2O. Barbed tapered airflow connections accept 3/16 in. (4.75 mm) I.D. tubing. Allows for readings across the 0-2in. H2O range, accurate to ±5% of full flow at 2 in. H2O
<b>Outputs</b>		<div>Universal output1 Output selectable to 0-10 Vdc (20 mA max), 12 Vdc 80 Hz PWM, or (Dry Contact) Rated @24VAC 1 Amp</div> <div>Analog Output2 Analog Outputs 10Vdc @ 20mA max (D/A Resolution 12 bits)</div> <div>Digital output6 Digital outputs (Dry Contact) Rated @24Vac/Vdc 1 Amp. Configured normally open</div>
<b>Memory</b>		4 GBs eMMC Flash memory and 256 MB DDR3 DRAM. User data is archived to non-volatile flash memory when parameters are changed, every 90 seconds
<b>Real Time Clock</b>		Real-time clock keeps track of time in the event of a power failure for at least 3 days
<b>Compliance</b>		<b>United States:</b> FCC compliant to Title CFR47, Part 15, Subpart B, Class A; UL Listed, File E143900; CCN PAZX, UL 916, Energy Management Equipment; <b>ANZ:</b> RCM Mark AS/NZS 61000-6-3; <b>Canada:</b> UL Listed File E143900, CCN PAZX7, CAN/CSA C22.2 No. 205 Signal Equip., Industry Canada Compliant ICES-003, Class A; <b>CE Mark</b> Compliant with 2014/30/EU, and RoHS Compliant: 2015/863/EU; <b>UKCA Mark</b> compliant with Electromagnetic Compatibility Regulations 2016 – Gov.UK and RoHS for Electrical and Electronic Equipment 2012.
<b>Plastic Rating</b>		Fire-retardant plastic ABS, UL94-5VA
<b>Environmental</b>		<div>Operating Range: -22 to 158°F (-30 to 70°C), 10-95% RH, non-condensing</div> <div>Storage: -40 to 158°F (-40 to 70°C), 10-95% RH, non-condensing</div>

### Physical

Minimum panel depth:  
2.75 in. (7 cm)




### Dimensions:

#### Overall

- A:** 7.785 in. (19.77 cm)
- B:** 4.89 in. (12.43 cm)
- Depth:** 2.00 in. (5.09 cm)
- Weight:** 1.6 lb. (0.82 kg)

#### Screw Mounting

- C:** 5.3 in (13.46 cm)  
(fully extended)
- D:** 4.5 in. (11.43 cm)

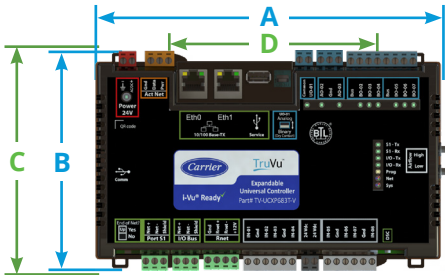

DIN rail or Screw mounting

supports one  
I/O expander

TV-UCXP10

For more information, contact  
your local Carrier Controls Expert.

Controls Expert Locator:  
[www.carrier.com/controls-experts](http://www.carrier.com/controls-experts)