

VRF Indoor Unit 40VMW009---3 — High Wall



Submittal Data

Job Name _____ Location _____
Tag _____



STANDARD FEATURES

- Dual Guided Air Design Provides Smoother and More Comfortable Air Flow
- Three Fan Speeds - High, Medium and Low
- Front Panel Lifts Up 65 Degrees Providing Ease of Maintenance
- Heating Mode, Swing Angle for Louver is 68 to 110 Degrees in Auto Mode
- Non-Heating Mode, Swing Angle for Louver is 61 to 93 Degrees in Auto Mode
- Manual Setting for Louver, Swing Angle Between 61 and 110 Degrees
- Multi-Refrigerant Outlet Piping Methods - Left, Right or Rear
- Built in EXV (Electronic Expansion Valve) for Installation Ease


Indoor Unit Model		40VMW009---3
PERFORMANCE		
Total Cooling Rated Capacity	Btu/h	9,630
Sensible Cooling Capacity	Btu/h	6,520
Total Heating Rated Capacity	Btu/h	10,900
Airflow (H / M / L)	CFM	320 / 270 / 245
Sound Pressure (H / M / L)	dBA	34.5 / 32.6 / 31.8
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	25
Minimum Circuit Amps	A	0.45
Maximum Overcurrent Protection	A	15
Motor Type		DC

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4 (OD)
Pipe Connection Size - Suction	in.	1/2 (OD)
Pipe Connection Size - Drain	in.	3/4 NPT (OD)
Refrigerant		R-410A
Unit Width	in.	36
Unit Height	in.	11-3/8
Unit Depth	in.	9
Unit Net Weight	lb	28

ACCESSORIES (Optional)

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

DIMENSIONAL DRAWING **INDOOR UNIT HIGH WALL 40VMW009---3**

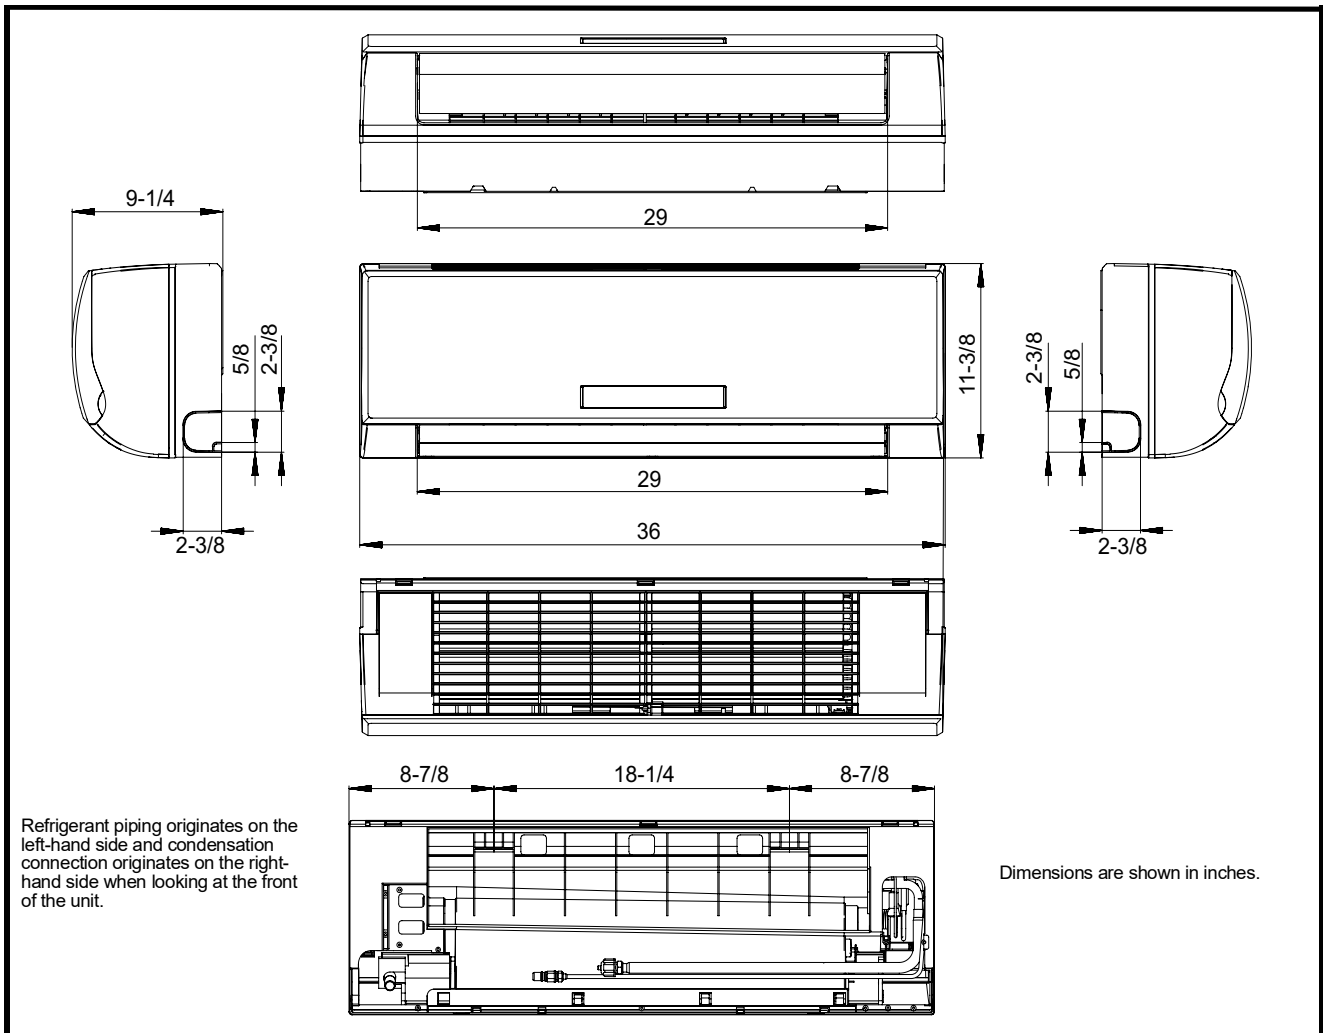

MOUNTING PLATE **INDOOR UNIT HIGH WALL 40VMW009---3**

