

VRF Indoor Unit 45VML018---3—Low Static Duct



Submittal Data

Job Name _____ Location _____
Tag _____



STANDARD FEATURES

- Rear Return Air Opening is Standard and Bottom Return is Optional
- Three Fan Speeds - High, Medium, and Low
- Knockout for Outside Air
- Built-in Drain Pump from Factory
- Built in EEV (Electronic Expansion Valve) for Installation Ease
- Internally Installed A2L Refrigerant Leak Sensor

INDOOR UNIT MODEL		45VML018---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	18,000
Heating Rated Capacity	Btu/h	21,000
Airflow (H / M / L)	CFM	533 / 406 / 278
Sound Pressure (H / M / L)	dBA	39 / 31.5 / 26
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Fan Motor Rated Motor (Output)	W	30
Minimum Circuit Amps (MCA)	A	1.32
Maximum Overcurrent Protection	A	15.0
Motor Type		DC

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4
Pipe Connection Size - Suction	in.	1/2
Pipe Connection Size - Drain	in.	1
External Static Pressure (ESP)	in. wg	0.04(0-0.2)
Refrigerant		R-454B
Unit Width	in.	35-7/16
Unit Height	in.	7-7/8
Unit Depth	in.	18-7/8
Net Unit Weight	lb	39.7


ACCESSORIES

- ☐ Wireless Remote Controller 45VM900001
- ☐ Wired Remote Controller - Non-Prog. 45VM900002

DIMENSIONAL DRAWING


INDOOR UNIT LOW STATIC DUCT 45VML018---3

External dimension, air outlet size, and size of fresh air outlet:

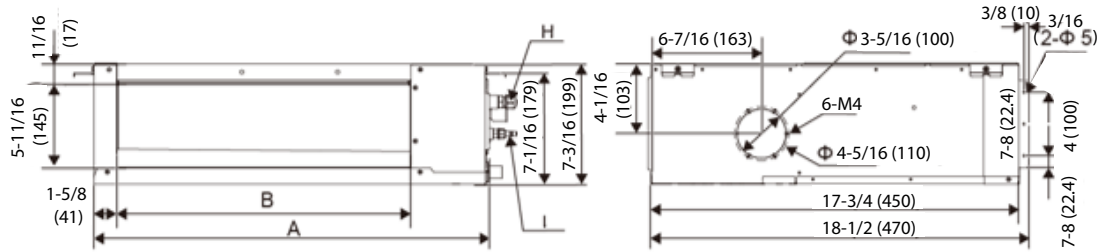


Size of return air inlet (back return air mode):

Dimension of pipe and water pipe:

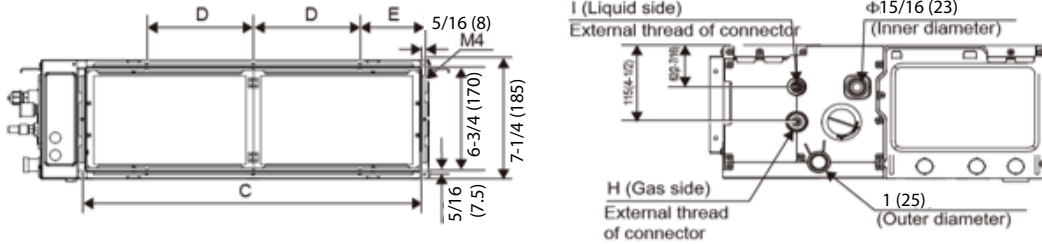

Size of return air inlet (bottom return air mode), and the distance between the lugs:

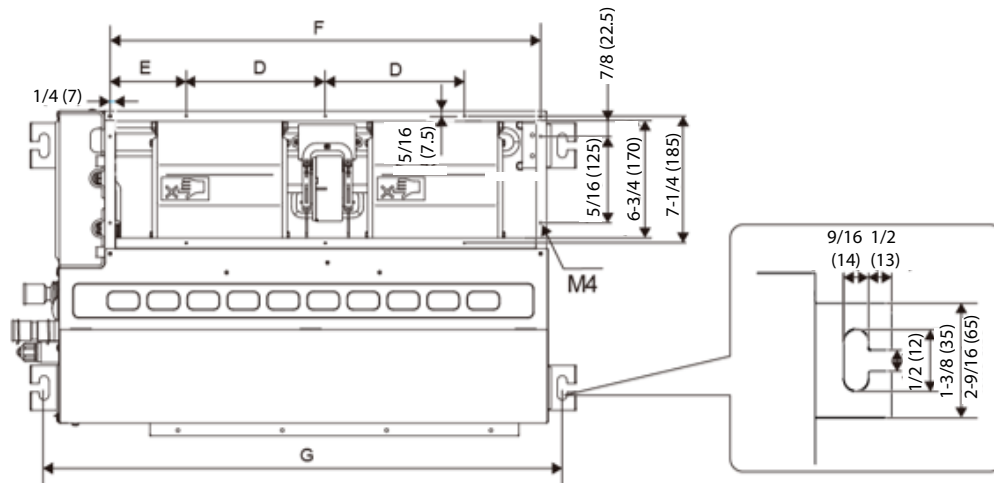

Capacity (kBTU/h)	A	B	C	D	E	F	G	H	I
18	43-5/16 (1100)	36-5/8 (930)	39-9/16 (1005)	8-7/8 (200)	4-5/16 (109.5)	40-1/8 (1019)	45-1/16 (1145)	7/8-14 UNF	5/8-18 UNF

Note: All dimensions are shown in inches

