

# VRF Indoor Unit 45VMF048---3---4-Way Cassette



## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_



### STANDARD FEATURES

- Delivers air in all four directions
- Knock out for OA opening
- Louver control (fixed or swing)
- Three fan speeds - high, medium, and low
- Built-in condensate lift mechanism
- Built in EXV (Electronic Expansion Valve) for installation ease

INDOOR UNIT MODEL		45VMF048---3
PERFORMANCE		
Total Cooling Rated Capacity	Btu/h	48,000
Total Heating Rated Capacity	Btu/h	54,000
Airflow (H / M / L)	CFM	1207 / 1024 / 840
Sound Pressure (H / M / L)	dBA	55 / 54 / 50
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Rated Motor (Output)	W	125
Minimum Circuit Amps (MCA)	A	2.20
Maximum Overcurrent Protection	A	15.0
Motor Type		DC


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	1 (OD)
Refrigerant		R-454B
Unit Width	in.	33-1/8
Unit Height	in.	11-5/16
Unit Depth	in.	33-1/8
Unit Net Weight	lbs.	61.7
Panel Width	in.	37-3/8
Panel Height	in.	3
Panel Depth	in.	37-3/8
Panel Net Weight	lbs.	12.8

### ACCESSORIES

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

## DIMENSIONAL DRAWING

### INDOOR UNIT 4-WAY CASSETTE 45VMF048---3

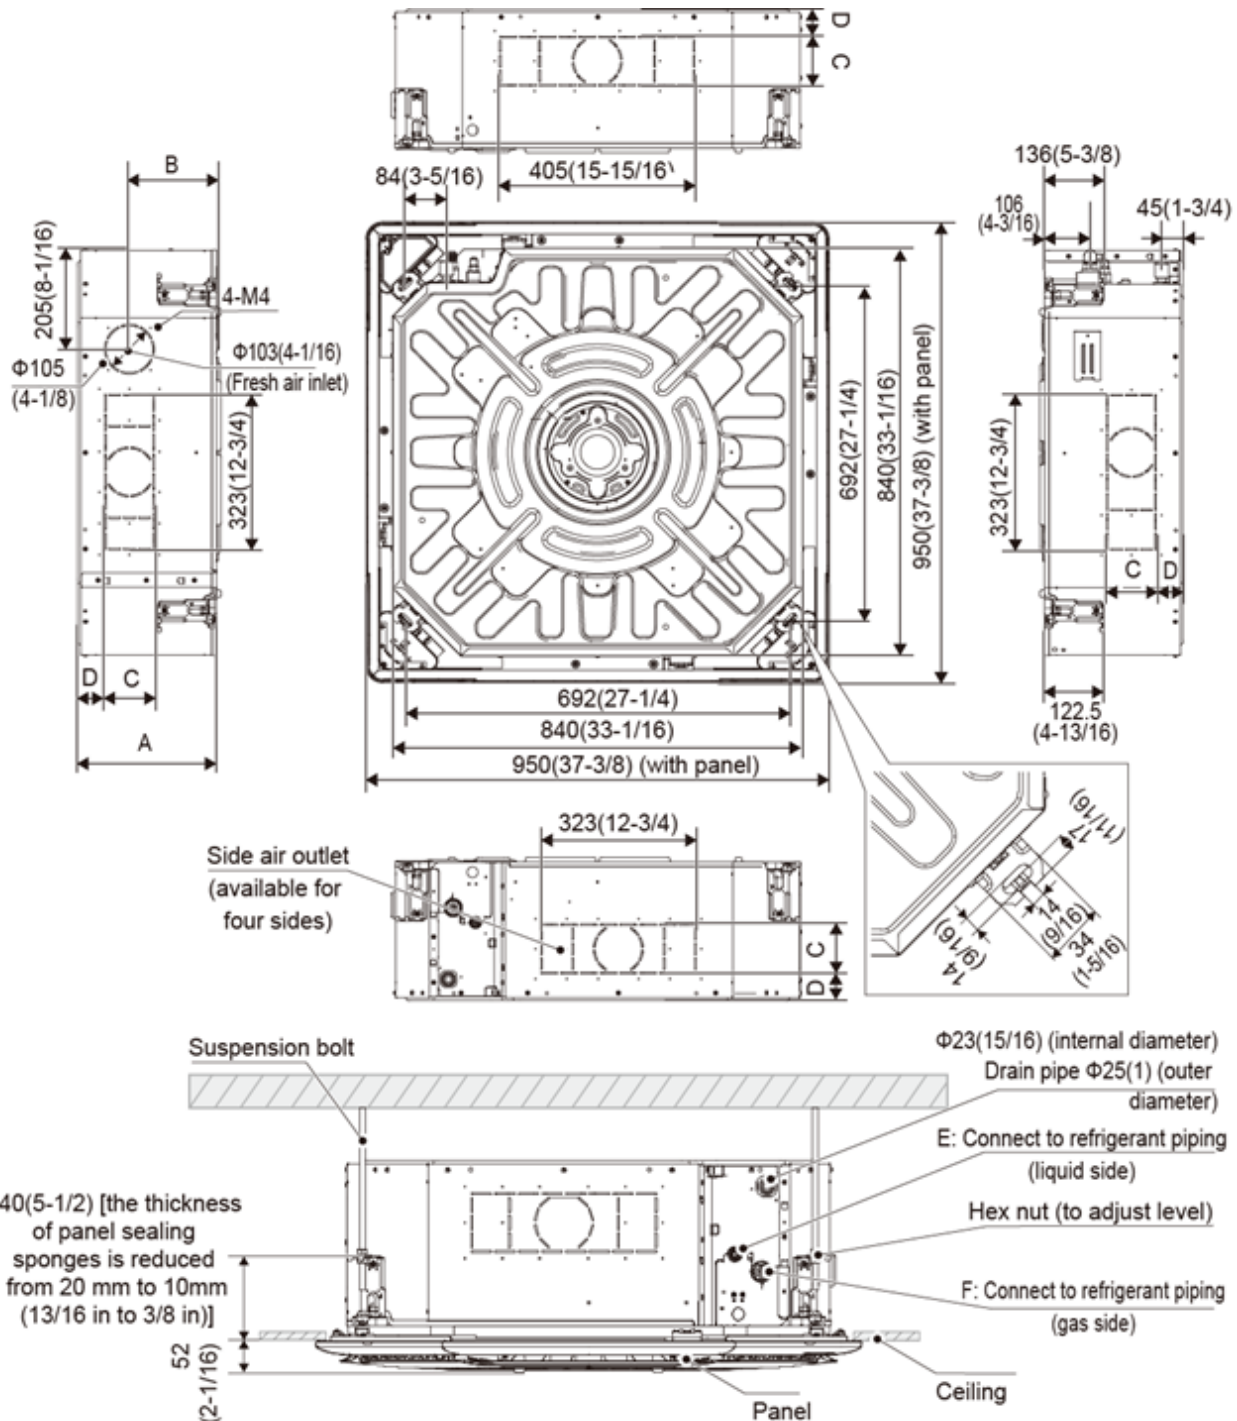

Dimensions are shown in mm (in)

A	B	C	D	E	F
288 (11-5/16)	190 (7-1/2)	103 (4-1/16)	56.5 (2-1/4)	Φ 15.9 (5/8)	Φ 9.52 (3/8)

