SMMSu / SHRMu VRF Indoor Unit MMU-UP0151HP-UL—4-Way-Cassette



Submittal Data

Job Name _.	 Location	
Tod		



SMMSu / SHRMu VRF 4-Way Cassette Features

- R-410A refrigerant
- Eleven sizes from 7,500 to 54,000 Btu/h
- · Optional fresh air intake
- Quiet operation (as low as 29 dBA)
- · Standard condensate pump with 26 in. lift capacity
- · Independent louver control (fixed or swing)
- · Optional wired or wireless controls
- · Auto or manually set three fan speeds
- · Easy to remove cleanable filter
- Five-year parts limited warranty

INDOOR UNIT MODEL	MMU-UP0151HP-UL						
PERFORMANCE							
Cooling Rated Capacity	Btu/h	15,400					
Heating Rated Capacity	Btu/h	17,000					
Fan Type (Qty)	Turbo (1)						
Airflow (H / M / L)	CFM	550 / 480 / 440					
Sound Pressure (H / M / L)	dBA	35 / 33 / 31					
ELECTRICAL							
Power Supply	V/Ph/Hz	208-230/1/60					
Power Consumption (Input)	kW	0.026					
Full Load Amps (FLA)	Α	0.80					
Minimum Circuit Amps (MCA)	Α	1.00					
Maximum Overcurrent Protection (MOCP)	Α	15.0					
MOTOR							
Motor Type	DC						
Motor Watts	W	60					

PHYSICAL DATA				
Pipe Connection Size - Liquid (High Pressure)	in.	1/4 (Flare)		
Pipe Connection Size - Gas (Low Pressure)	in.	1/2 (Flare)		
Pipe Connection Size - Drain (OD)	in.	1-1/4		
Pipe Connection Size - Drain (ID)	in.	1		
Refrigerant		R-410A		
External Finish		Zinc Hot Dipping Steel Plate		
Unit Width	in.	33-1/8		
Unit Height	in.	10-1/8		
Unit Depth	in.	33-1/8		
Unit Net Weight	lb	51		
Panel Width	in.	37-3/8		
Panel Height	in.	1-3/16		
Panel Depth	in.	37-3/8		
Panel Net Weight	lb	10		
FILTER (Included)				
Туре	Washable			
Quantity	1			
MERV rating	5			
Dimensions	in.	21-3/8 x 21-7/8 x 3/4		

ACCESSORIES (Optional)

- ☐ Wired Remote Controller (7-Day Programmable) RBC-AMS54E-UL / RBC-AWSU52-UL
- ☐ Simple Wired Remote Control RBC-AS41UL
- □ Wireless Receiver Kit RBC-AXU33UP-UL
- ☐ Wireless Controller Kit RBC-AXU31UP-UL
- ☐ Remote Sensor TCB-TC41U-UL

	Grille	Panel	RBC-L	J32P	GP-UL
--	--------	-------	-------	------	-------

- ☐ Spacer for Height Adjustment TCB-SP1602UUL
- ☐ Air Discharge Direction Kit TCB-BC1602UUL
- ☐ Fresh Air Chamber TCB-GFC1602UUL
- ☐ Fresh Air Inlet Box TCB-GB1602UUL
- ☐ Auxiliary Fresh Air Flange TCB-FF101URUL
- ☐ Occupancy Sensor TCB-SIR33UP-UL

© 2023 Carrier. All rights reserved.

Edition Date: 01/23


Form No: MMU-UP0151HP-UL 01

A Carrier Company

Printed in U.S.A.

Replaces: New

DIMENSIONAL DRAWING INDOOR UNIT 4-WAY CASSETTE MMU-UP0151HP-UL

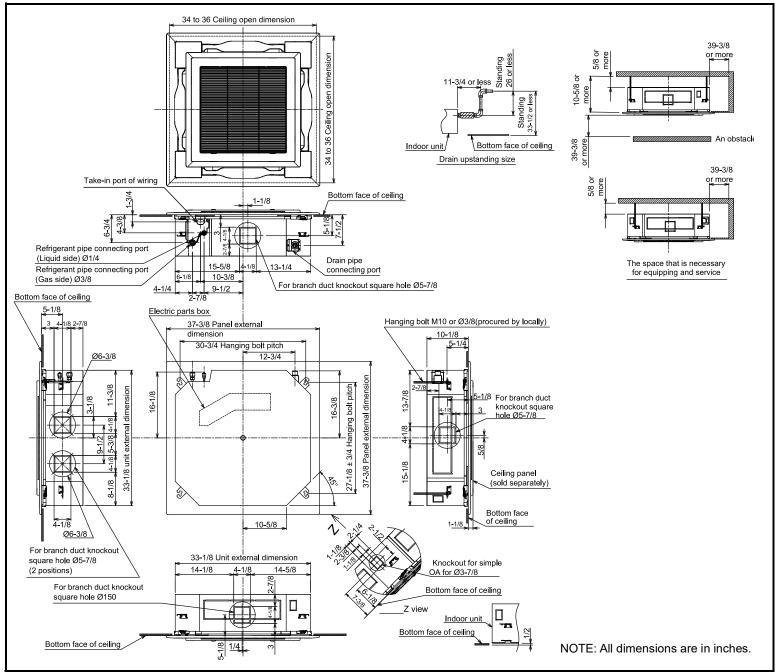

A210767



A Carrier Company