


VRF Indoor Unit 45VMM009---3—Medium Static Duct



Submittal Data

Job Name _____ Location _____
Tag _____

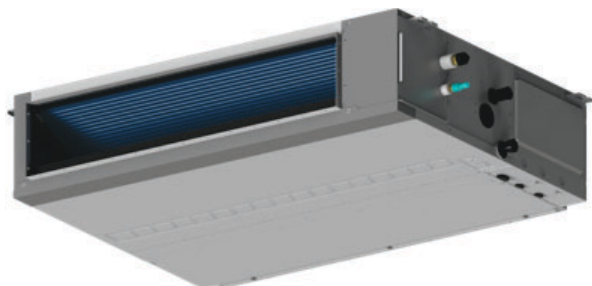

STANDARD FEATURES

- Rear Return Air Opening is Standard and Bottom Return is Optional
- Three Fan Speeds - High, Medium, and Low
- Knockout for Outside Air
- Built-in Condensate Lift Mechanism (27-1/2")
- Built in EXV (Electronic Expansion Valve) for Installation
- Internally Installed A2L Refrigerant Leak Sensor

INDOOR UNIT MODEL		45VMM009---3
PERFORMANCE		
Total Cooling Rated Capacity	Btu/h	9,000
Total Heating Rated Capacity	Btu/h	10,000
Airflow (H / M / L)	CFM	372 / 307 / 242
Sound Pressure (H / M / L)	dBA	36.1 / 32.5 / 29
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	50
Minimum Circuit Amps (MCA)	A	2.24
Maximum Overcurrent Protection	A	15
Motor Type		DC


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4
Pipe Connection Size - Suction	in.	1/2
Pipe Connection Size - Drain	in.	1
External Static Pressure (ESP)	in. wg	0.2 (0-0.64)
Refrigerant		R-454B
Unit Width	in.	27
Unit Height	in.	9-5/8
Unit Depth	in.	31-7/8
Net Unit Weight	lb	54

ACCESSORIES


- ☐ Wireless Remote Controller 45VM900001
☐ Wired Remote Controller - Non-Prog. 45VM900002

DIMENSIONAL DRAWING **INDOOR UNIT MEDIUM STATIC DUCT 45VMM009---3**


External dimension, air outlet size, and size of fresh air outlet:

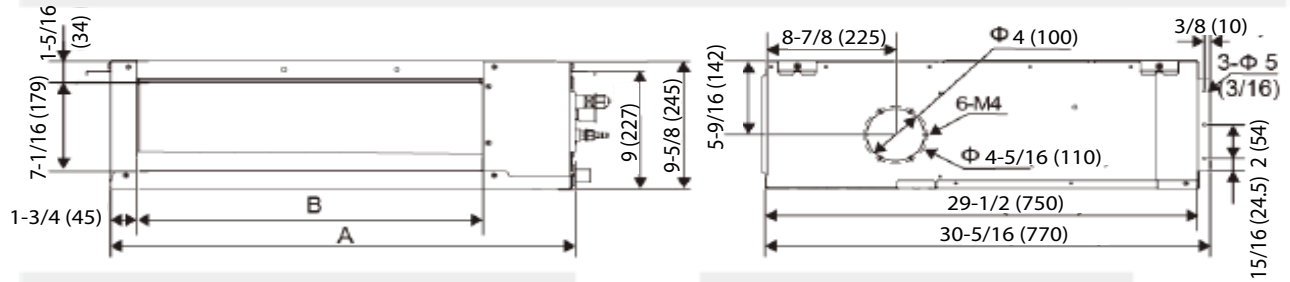


Size of return air inlet (back return air mode):

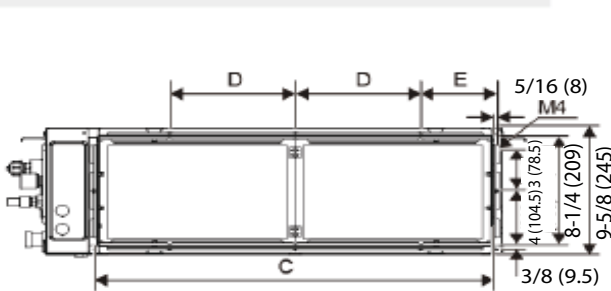

Dimension of pipe and water pipe:

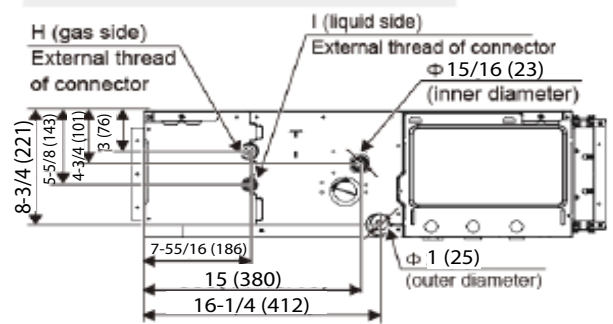

Size of return air inlet (bottom return air mode), and the distance between the lugs:

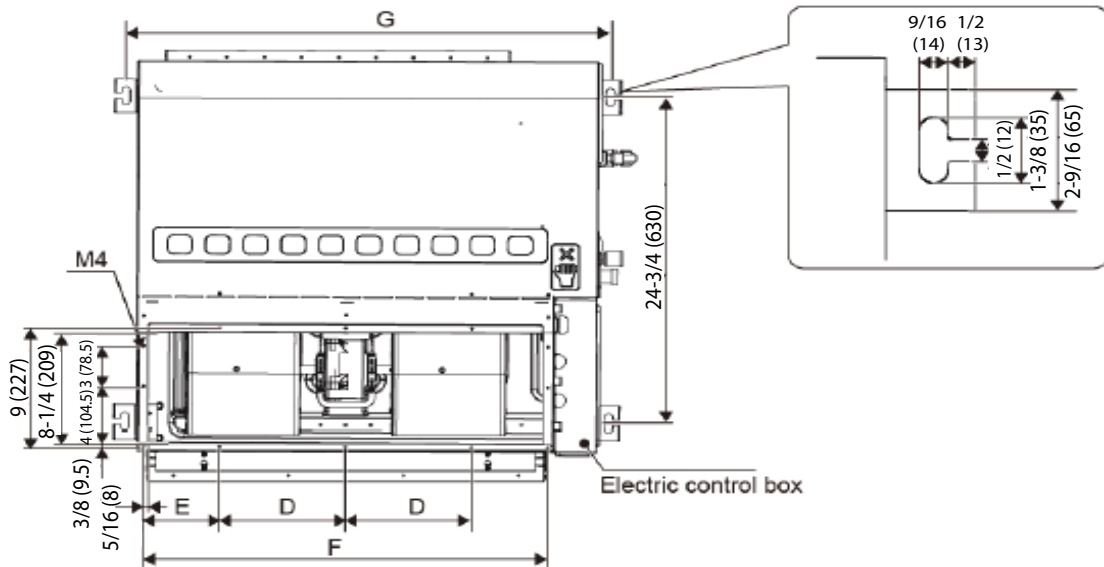

Capacity (kBtu/h)	A	B	C	D	E	F	G	H	I
09	31-1/2 (800)	23-5/8 (600)	27-3/16 (690)	8-3/4 (220)	5-1/4 (134)	27-3/4 (706)	33-1/4 (845)	7/8-14 UNF	5/8-18 UNF

Note: All dimensions are shown in inches