

# SMMSu / SHRMu VRF Indoor Unit MMD-UP0071BHP-UL—Concealed Duct

**TOSHIBA**  
*Carrier*

## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_



A210775

### SMMSu / SHRMu CONCEALED DUCT FEATURES

- R-410A Refrigerant
- Twelve sizes from 7,500 to 54,000 Btu/h
- Standard condensate pump with 24.3 in. lift capability
- Quiet operation, as low as 30 dBA
- Rear return configurable for bottom return
- Auto or manually set three fan speeds
- Five-year parts limited warranty

INDOOR UNIT MODEL		MMD-UP0071BHP-UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	7,500
Heating Rated Capacity	Btu/h	8,500
Fan Type (Qty)		Centrifugal (1)
External Static Pressure (ESP)	in.	0.4 (Factory default) 0.6 (Max)
Standard Airflow (H / M / L)	CFM	318 / 265 / 212
Sound Pressure (H / M / L)*	dBA	39 / 34 / 30
FILTER (Standard)		
Type		Washable
Quantity		1
MERV Corresponding Value		5
Dimensions (W x L x D)	in.	10-5/8 x 27-5/8 x 5/8
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.07
Full Load Amps (FLA)	A	0.73
Minimum Circuit Amps (MCA)	A	0.91
Maximum Overcurrent Protection (MOCP)	A	15.0


### ACCESSORIES

- ☐ Wired Remote Controller (7-Day Programmable) RBC-AMS54E-UL / RBC-AWSU52-UL
- ☐ Simple Wired Remote Control RBC-AS41UL
- ☐ Remote Sensor TCB-TC41U-UL
- ☐ Auxiliary OA Flange TCB-FF151US-UL
- ☐ Zoning Duct Flange TCB-SF56C6BP-UL
- ☐ Filter Kit TCB-FW561DP-UL

\* The actual values in an external operating environment are generally higher than the indicated values due to ambient noise.

MOTOR		
Motor Type		DC
Motor Watts		150
PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4 (Flare)
Pipe Connection Size - Suction	in.	3/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4
Pipe Connection Size - Drain (ID)	in.	1
Refrigerant		R-410A
External Finish		Zinc Hot Dipped Steel Plate
Unit Width	in.	27-5/8
Unit Height	in.	10-7/8
Unit Depth	in.	29-5/8
Net Weight	lb	56

# DIMENSIONAL DRAWING CONCEALED DUCT MMD-UP0071BHP-UL

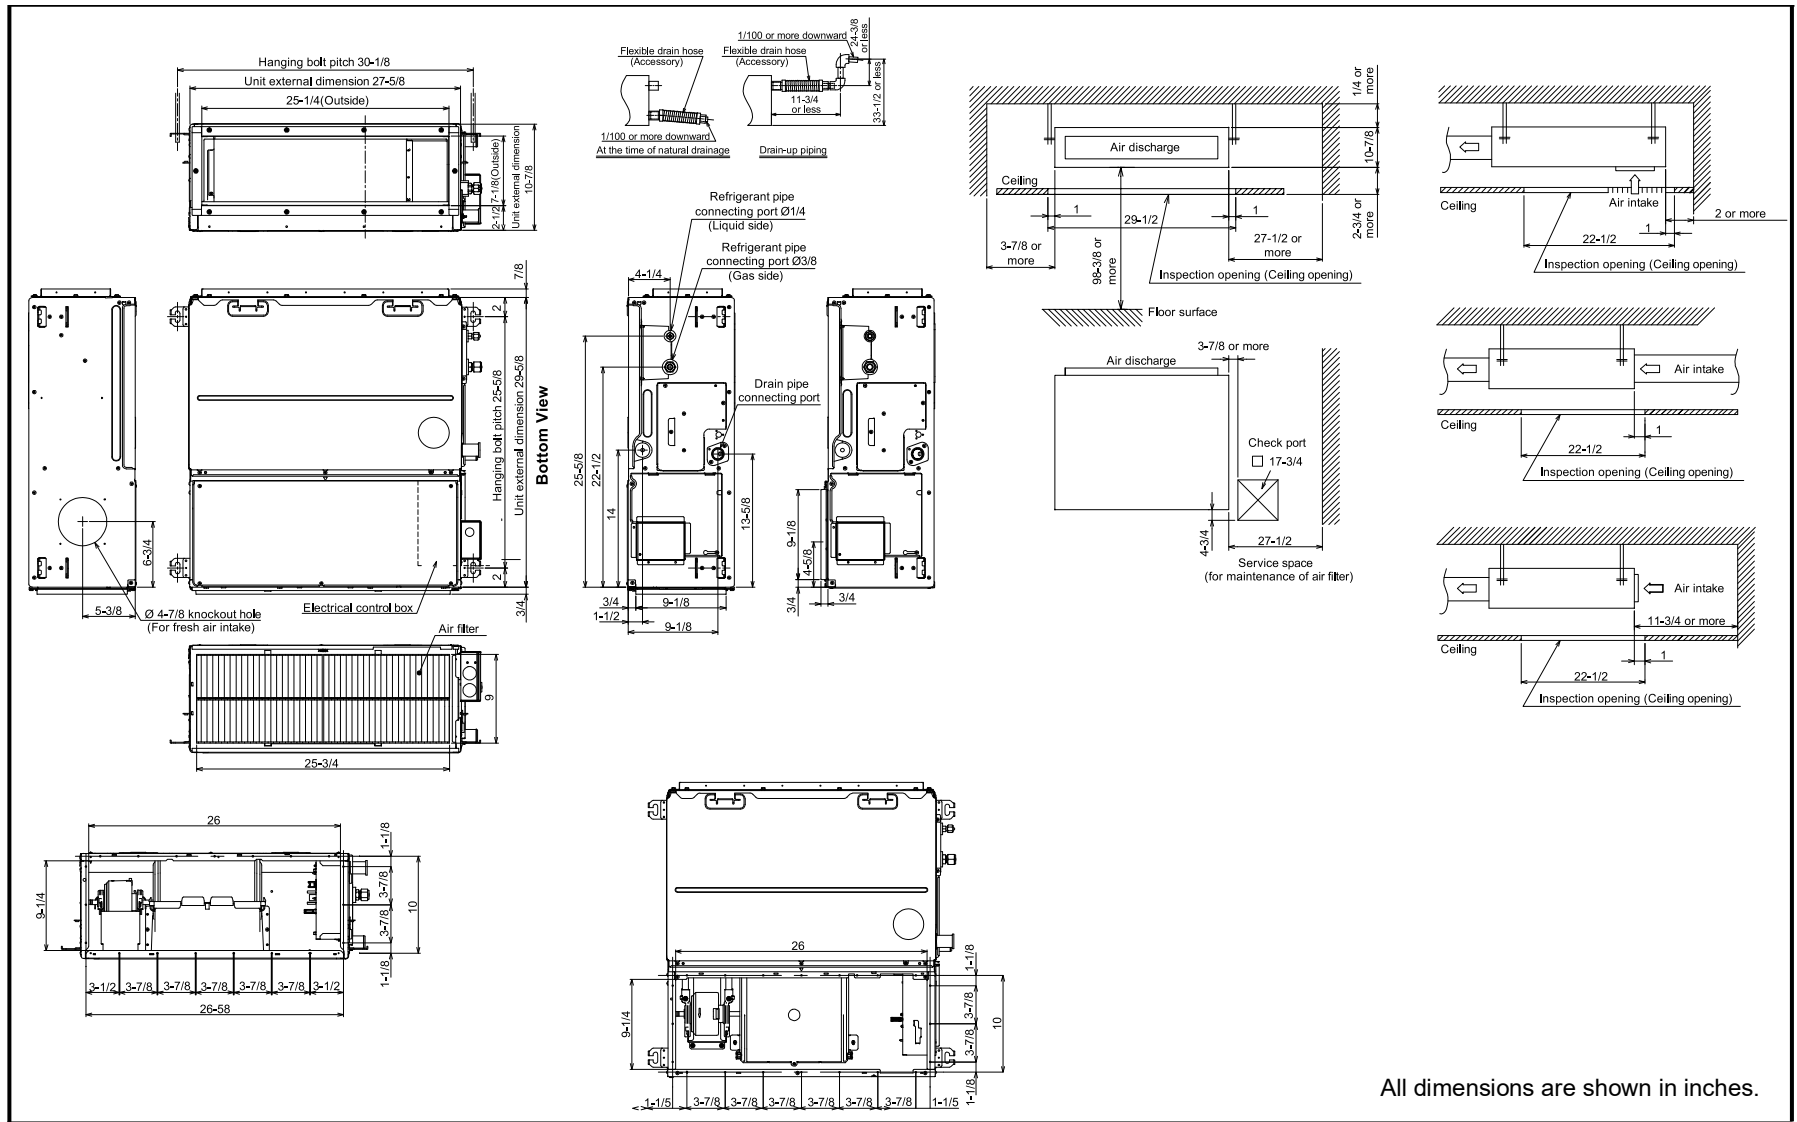

A210776

