

# SMMS-*u* / SHRM-*u* VRF Indoor Unit MML-UP0091H-UL - Floor Console - Exposed

**TOSHIBA**  
*Carrier*

## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_



### SMMS-*u* / SHRM-*u* VRF Floor Console - Exposed

#### Features

- R-410A Refrigerant
- Six sizes from 7,500 to 24,000 Btu/h
- Piping, wiring, and drain can be routed from side (right), bottom, or back.
- Five-year parts limited warranty


Indoor Unit Model	MML-UP0091H-UL	
PERFORMANCE		
Cooling Rated Capacity	Btu/h	9,500
Heating Rated Capacity	Btu/h	10,500
Fan Type (Qty)		Centrifugal (1)
Airflow ( L / M / H )	CFM	210 / 250 / 280
Sound Pressure ( L / M / H )	dBA	35 / 38 / 39 (208V) 38 / 40 / 42 (230V)
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.049 (208V) 0.058 (230V)
Full Load Amps (FLA)	A	0.3
Minimum Circuit Amps	A	0.4
Maximum Overcurrent Protection	A	15
Motor Type	AC Inverter Driven	
Motor Watts		19

<b>PHYSICAL DATA</b>		
Pipe Connection Size - Liquid (High Pressure)	in.	1/4 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	3/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	0.8
Refrigerant	R-410A	
External Finish	Silky Shade (Munsell 1Y8.5/0.5)	
Unit Width	in.	37.4
Unit Height	in.	24.8
Unit Depth	in.	9.1
Unit Net Weight	lb	81.6

#### ACCESSORIES (Optional)

- ☐ Wired Remote Controller (7-Day Programmable) RBC-AMS51E-ES / RBC-AWSU52-UL
- ☐ Simple Wired Remote Control RBC-AS41UL
- ☐ Remote Sensor TCB-TC41U-UL

# DIMENSIONAL DRAWING INDOOR UNIT FLOOR CONSOLE - EXPOSED MML-UP0091H-UL

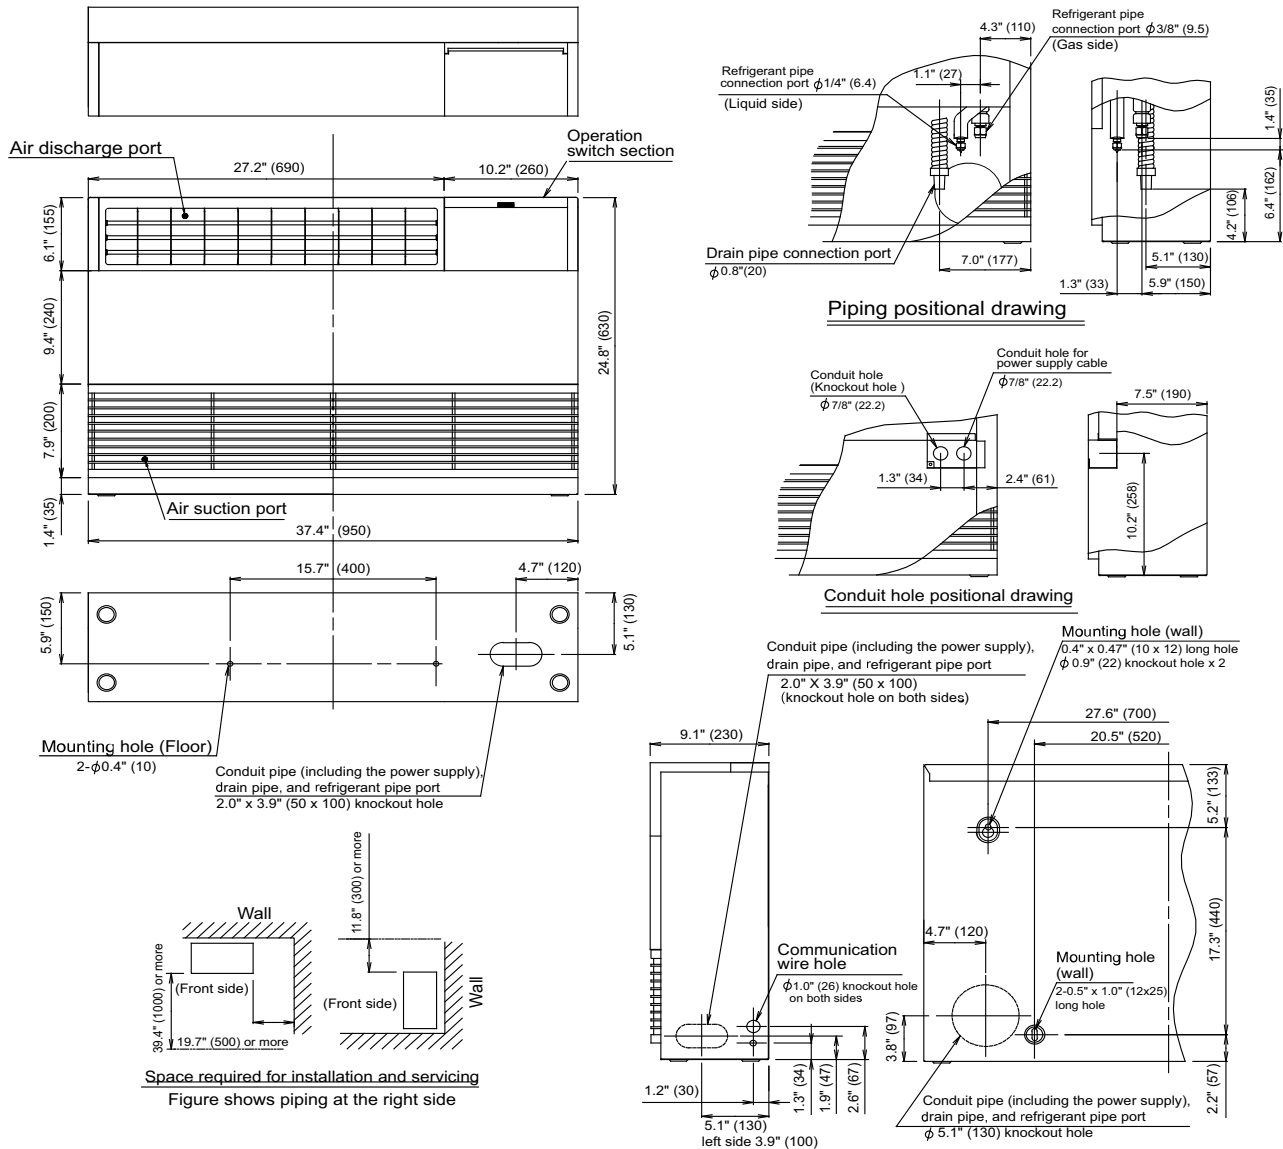

Units are in inches (mm)

