


# SMMSu / SHRMu VRF Indoor Unit MMU-UB0091YHP-UL—1-Way-Cassette

**TOSHIBA**  
*Carrier*

## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_

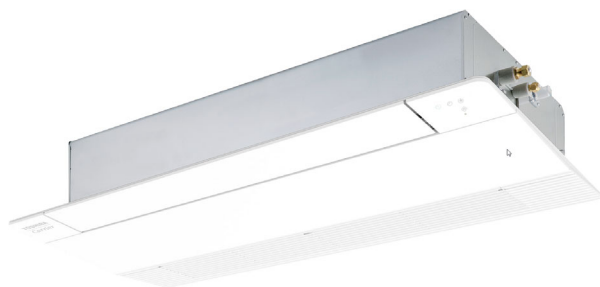

### SMMSu / SHRMu VRF 1-Way Cassette Features

- R-454B refrigerant
- Six sizes from (7,500-24,000 btu/h)
- Quiet operation, as low as 25 dBA
- One directional louver control
- Washable filter included
- Optional wired or wireless controllers
- Standard condensate lift mechanism with 15.4 in. lift capacity
- Auto or manually set three fan speeds
- Five-year parts limited warranty

INDOOR UNIT MODEL		MMU-UB0091YHP-UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	9,500
Heating Rated Capacity	Btu/h	10,500
Fan Type	Cross Flow Fan	
Airflow (H, M, L)	CFM	305 / 240 / 170
Sound Pressure (H, M, L)	dBA	39 / 35 / 26
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	W	18
Full Load Amps (FLA)	A	0.32
Minimum Circuit Amps (MCA)	A	0.40
Maximum Overcurrent Protection (MOCP)	A	15.0
MOTOR		
Motor Type	DC	
Motor Watts	W	30

PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	1/4 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	3/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4 (VP25)
Refrigerant	R-454B	
Unit Width	in.	39
Unit Height	in.	5-7/8
Unit Depth	in.	17-3/4
Unit Net Weight	lb	31
Panel Width	in.	48
Panel Height	in.	1-1/8
Panel Depth	in.	21
Panel Net Weight	lb	8.8


### ACCESSORIES (Optional)

- ☐ RBC-UY32P-UL: 1 Way Cassette Panel / Grille
- ☐ TCB-SIR41UYP-UL: Occupancy Sensor
- ☐ RBC-AX33UYP-UL: Wireless Controller Kit
- ☐ RBC-AMS54E-UL / RBC-AWSU52-UL: Wired Remote Controller

# DIMENSIONAL DRAWING

## INDOOR UNIT 1-WAY CASSETTE MMU-UB0091YHP-UL

Unit : in (mm)

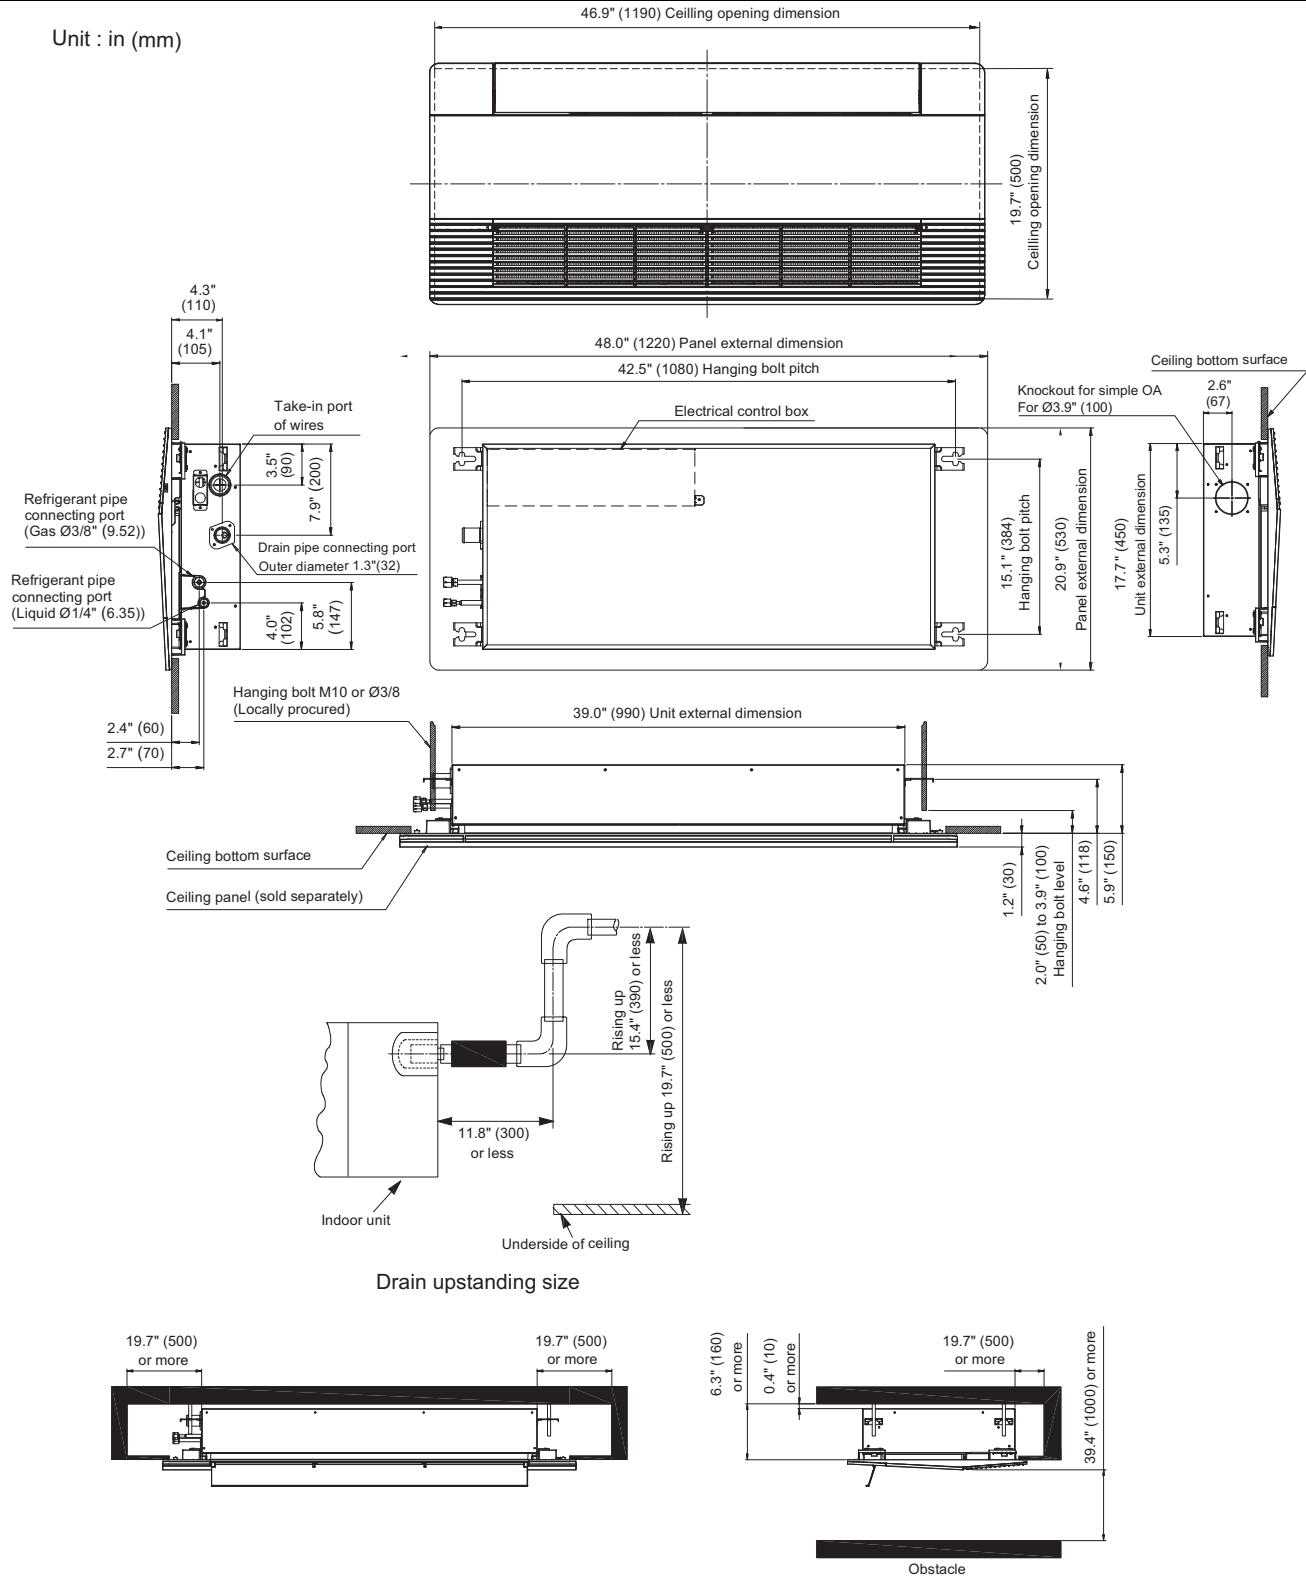

The space that is necessary for equipping and service

