

SMMSu / SHRMu VRF Indoor Unit MMU-UP0181HP-UL—4-Way-Cassette

TOSHIBA
Carrier

Submittal Data

Job Name _____ Location _____
Tag _____



A210766

SMMSu / SHRMu VRF 4-Way Cassette Features

- R-410A refrigerant
- Eleven sizes from 7,500 to 54,000 Btu/h
- Optional fresh air intake
- Quiet operation (as low as 29 dBA)
- Standard condensate pump with 26 in. lift capacity
- Independent louver control (fixed or swing)
- Optional wired or wireless controls
- Auto or manually set three fan speeds
- Easy to remove cleanable filter
- Five-year parts limited warranty


INDOOR UNIT MODEL		MMU-UP0181HP-UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	18,000
Heating Rated Capacity	Btu/h	20,000
Fan Type (Qty)	Turbo (1)	
Airflow (H/ M / L)	CFM	550 / 480 / 440
Sound Pressure (H/ M / L)	dBA	35 / 33 / 31
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.026
Full Load Amps (FLA)	A	0.80
Minimum Circuit Amps (MCA)	A	1.00
Maximum Overcurrent Protection (MOCP)	A	15.0
MOTOR		
Motor Type	DC	
Motor Watts	W	60

PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	1/4 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	1/2 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4
Pipe Connection Size - Drain (ID)	in.	1
Refrigerant	R-410A	
External Finish	Zinc Hot Dipping Steel Plate	
Unit Width	in.	33-1/8
Unit Height	in.	10-1/8
Unit Depth	in.	33-1/8
Unit Net Weight	lb	51
Panel Width	in.	37-3/8
Panel Height	in.	1-3/16
Panel Depth	in.	37-3/8
Panel Net Weight	lb	10
FILTER (Included)		
Type	Washable	
Quantity	1	
MERV rating	5	
Dimensions	in.	21-3/8 x 21-7/8 x 3/4

ACCESSORIES (Optional)

- | | |
|--|--|
| <input type="checkbox"/> Wired Remote Controller (7-Day Programmable)
RBC-AMS54E-UL / RBC-AWSU52-UL
<input type="checkbox"/> Simple Wired Remote Control RBC-AS41UL
<input type="checkbox"/> Wireless Receiver Kit
RBC-AXU33UP-UL
<input type="checkbox"/> Wireless Controller Kit
RBC-AXU31UP-UL
<input type="checkbox"/> Remote Sensor TCB-TC41U-UL | <input type="checkbox"/> Grille Panel RBC-U32PGP-UL
<input type="checkbox"/> Spacer for Height Adjustment TCB-SP1602UUL
<input type="checkbox"/> Air Discharge Direction Kit TCB-BC1602UUL
<input type="checkbox"/> Fresh Air Chamber TCB-GFC1602UUL
<input type="checkbox"/> Fresh Air Inlet Box TCB-GB1602UUL
<input type="checkbox"/> Auxiliary Fresh Air Flange TCB-FF101URUL
<input type="checkbox"/> Occupancy Sensor TCB-SIR33UP-UL |
|--|--|

DIMENSIONAL DRAWING INDOOR UNIT 4-WAY CASSETTE MMU-UP0181HP-UL

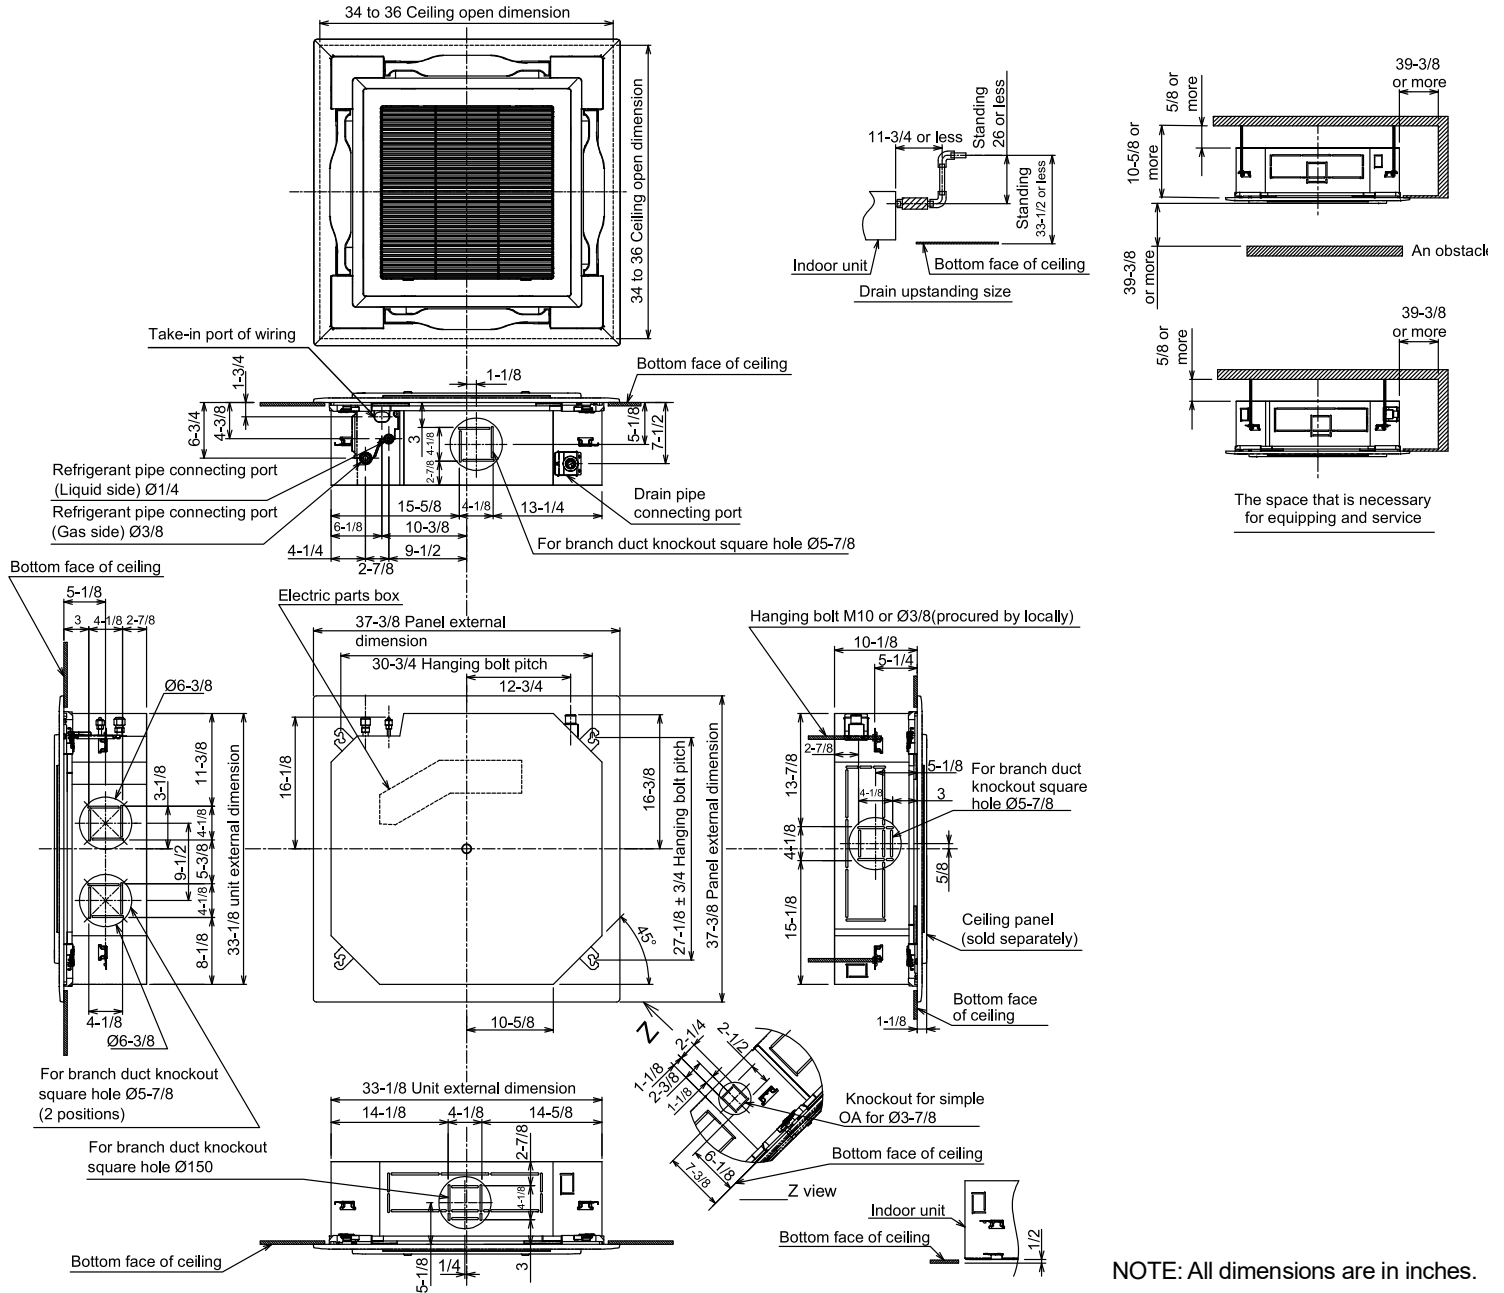

NOTE: All dimensions are in inches.

A210767

