


VRF Outdoor Unit MMY-UP2641FT9P-UL - Heat Recovery

TOSHIBA
Carrier

Submittal Data

Job Name _____ Location _____
Tag _____

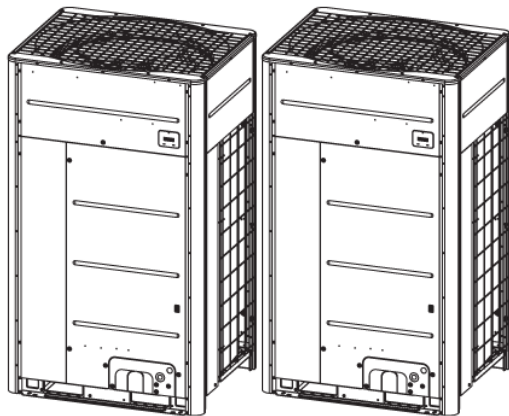

A210612

Heat Recovery Features

- Modules and pairings available from 6 to 42 tons
- Modules have inverter-driven rotary compressors
- Direct-drive, inverter-driven outdoor motor
- Up to 3937 ft actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil

- Operating temperature range
Cooling (db): -10° to 125°F (-15° to 52°C)
Heating (wb): -22° to 60°F (-25° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Combination Model		MMY-UP2641FT9P-UL
Header Unit Model		MUP1681FT9P-UL
Follower Unit Model		MUP0961FT9P-UL
PERFORMANCE		
Nominal Cooling Capacity	Btu/h	264,000
Nominal Heating Capacity	Btu/h	297,000
Maximum Number of Indoor Units		47
SIMULTANEOUS COOLING AND HEATING EFFICIENCY†		
SCHE, Ducted FCUs		30.50
SCHE, Ductless FCUs		31.00
COOLING EFFICIENCY†		
EER/IEER, Ducted FCUs	Btu/Wh	10.7/21.8
Power Consumption, Ducted FCUs	kW	21.18
EER/IEER, Ductless FCUs	Btu/Wh	11.7/22.9
Power Consumption, Ductless FCUs	kW	20.96
HEATING EFFICIENCY†		
COP at 47°F, Ducted FCUs		3.28
Power Consumption, Ducted FCUs	kW	23.00
COP at 47°F, Ductless FCUs		3.92
Power Consumption, Ductless FCUs	kW	20.66
Fan Type (Qty)		Propeller (2)
Airflow, Standard Range	CFM	8476 + 6357
Sound Pressure	dBA	65.1
External Static Pressure*	in. wg	0.321

LEGEND

db	— Dry Bulb
COP	— Coefficient of Performance
EER	— Energy Efficiency Ratio
FCU	— Fan Coil Unit
IEER	— Integrated Energy Efficiency Ratio
wb	— Wet Bulb
SCHE	— Simultaneous Cooling and Heating Efficiency

ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/3/60
Minimum Circuit Amps (MCA)	A	57.4 + 36.6
Maximum Overcurrent Protection (MOCP)	A	80 + 45
COMPRESSORS		
Type (Number)		Hermetic Triple + Hermetic Twin
FAN MOTOR		
Motor Output	kW	(0.48 x 2) + (0.66 x 1)
PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	5/8 + 1/2 (Brazed)
Pipe Connection Size - Gas (Low Pressure)	in.	1-1/8 + 7/8 (Brazed)
Discharge - Gas (High/Low Pressure)		7/8 + 3/4 (Brazed)
Refrigerant		R-410A
Factory Charge††	lb	19.8 + x 13.2
Unit Width	in.	51-1/2 + 39-1/2
Unit Height	in.	66-1/2 x 2
Unit Depth	in.	31-1/4 x 2
Net Weight	lb	783 + 532

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db

Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb


*Requires setting by menu functions.

††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.

DIMENSIONAL DRAWING OUTDOOR UNIT MMY-UP2641FT9P-UL

Two units connected

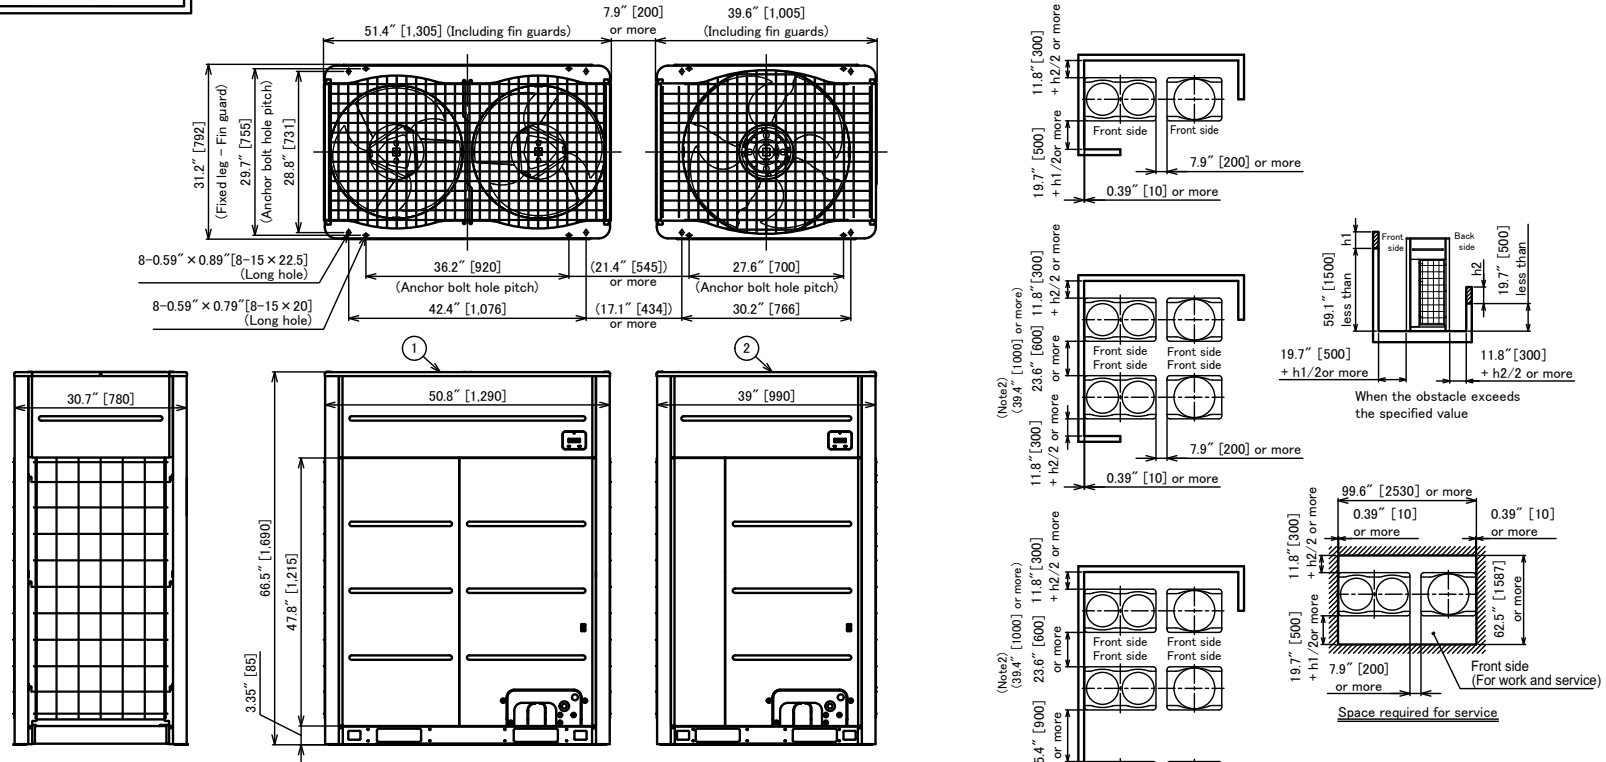

Note)

- If there is an obstacle at the upper side of the outdoor unit, set the top end of the outdoor unit 78.7in [2000mm] apart from the obstacle.
- Draw out the pipe procured locally to the front of the outdoor unit horizontally, and keep 19.7in [500mm] or more between the outdoor unit and traversing pipe if placing pipe transversely.
- Arrange each outdoor unit in order of its capacity.
(Header unit① ≥ Follower unit②)

Model name	Outdoor unit	
	① Header unit	② Follower unit
MMY-UP2641FT9P-UL	MMY-MUP1681FT9P-UL	MMY-MUP0961FT9P-UL

(Unit : in [mm])

