


VRF Indoor Unit 45VMM007---3—Medium Static Duct



Submittal Data

Job Name _____ Location _____
Tag _____

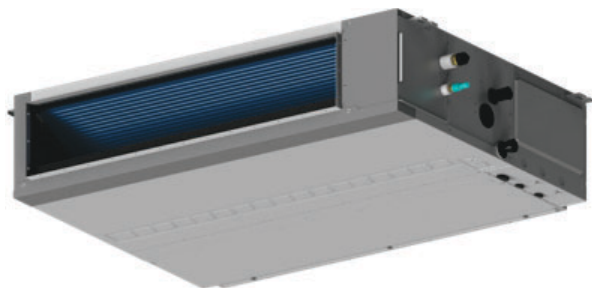

STANDARD FEATURES

- Rear Return Air Opening is Standard and Bottom Return is Optional
- Three Fan Speeds - High, Medium, and Low
- Knockout for Outside Air
- Built-in Condensate Lift Mechanism (27-1/2")
- Built in EXV (Electronic Expansion Valve) for Installation
- Internally Installed A2L Refrigerant Leak Sensor

INDOOR UNIT MODEL		45VMM007---3
PERFORMANCE		
Total Cooling Rated Capacity	Btu/h	7,000
Total Heating Rated Capacity	Btu/h	8,000
Airflow (H / M / L)	CFM	291 / 246 / 201
Sound Pressure (H / M / L)	dBA	31.3 / 28.5 / 26.9
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	50
Minimum Circuit Amps (MCA)	A	2.20
Maximum Overcurrent Protection	A	15
Motor Type		DC

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4
Pipe Connection Size - Suction	in.	1/2
Pipe Connection Size - Drain	in.	1
External Static Pressure (ESP)	in. wg	0.2 (0-0.64)
Refrigerant		R-454B
Unit Width	in.	27
Unit Height	in.	9-5/8
Unit Depth	in.	31-7/8
Net Unit Weight	lb	54



ACCESSORIES

- ☐ Wireless Remote Controller 45VM900001
☐ Wired Remote Controller - Non-Prog. 45VM900002


DIMENSIONAL DRAWING

INDOOR UNIT MEDIUM STATIC DUCT 45VMM007---3


External dimension, air outlet size, and size of fresh air outlet:

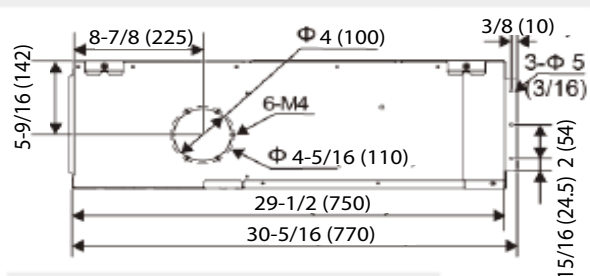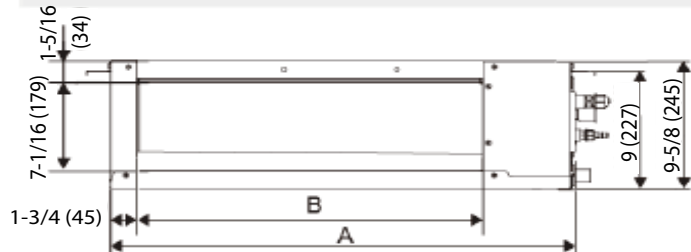


Size of return air inlet (back return air mode):

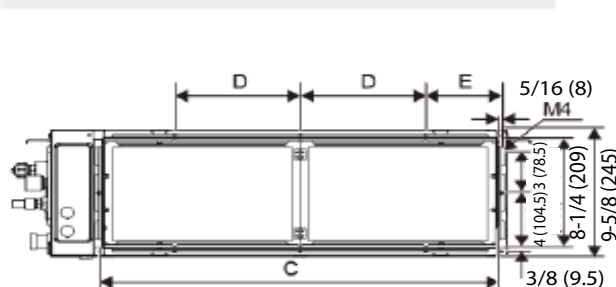

Dimension of pipe and water pipe:

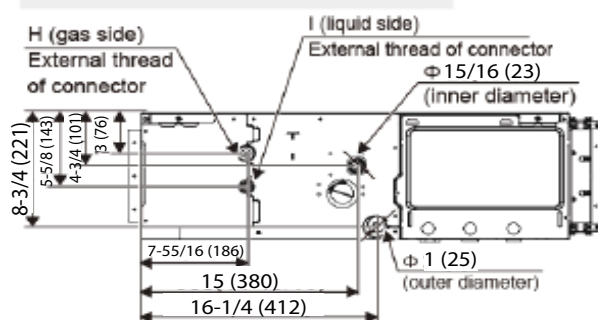

Size of return air inlet (bottom return air mode), and the distance between the lugs:

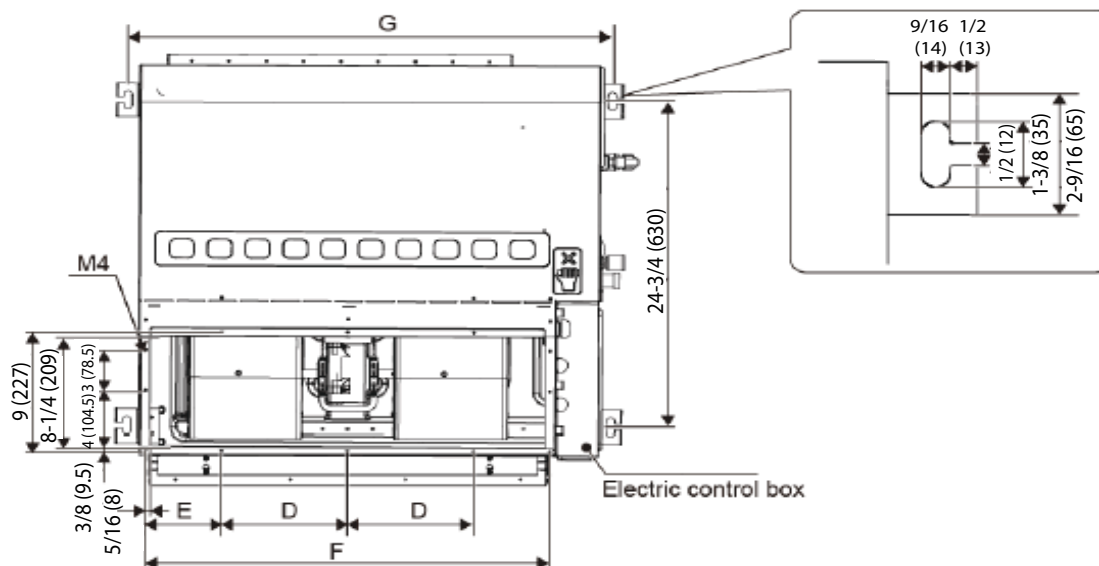

Capacity (kBtu/h)	A	B	C	D	E	F	G	H	I
07	23-5/8 (600)	15-3/4 (400)	19-5/16 (490)	3-7/16 (87.5)	6-1/2 (165)	20 (506)	25-3/8 (645)	3/4-16 UNF	7/16-20 UNF

Note: All dimensions are shown in inches