

# SMMSu / SHRMu VRF Indoor Unit MMU-UB0151YHP-UL—1-Way-Cassette

**TOSHIBA**  
*Carrier*

## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_



### SMMSu / SHRMu VRF 1-Way Cassette Features

- R-454B refrigerant
- Six sizes from (7,500-24,000 btu/h)
- Quiet operation, as low as 25 dBA
- One directional louver control
- Washable filter included
- Optional wired or wireless controllers
- Standard condensate lift mechanism with 15.4 in. lift capacity
- Auto or manually set three fan speeds
- Five-year parts limited warranty

INDOOR UNIT MODEL		MMU-UB0151YHP-UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	15,400
Heating Rated Capacity	Btu/h	17,000
Fan Type	Cross Flow Fan	
Airflow (H, M, L)	CFM	440 / 370 / 310
Sound Pressure (H, M, L)	dBA	39 / 36 / 33
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	W	25
Full Load Amps (FLA)	A	0.58
Minimum Circuit Amps (MCA)	A	0.73
Maximum Overcurrent Protection (MOCP)	A	15.0
MOTOR		
Motor Type	DC	
Motor Watts	W	42


PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	1/4 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	1/2 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4 (VP25)
Refrigerant	R-454B	
Unit Width	in.	46-3/8
Unit Height	in.	5-7/8
Unit Depth	in.	17-3/4
Unit Net Weight	lb	34
Panel Width	in.	55-1/2
Panel Height	in.	1-1/8
Panel Depth	in.	20-7/8
Panel Net Weight	lb	11

### ACCESSORIES (Optional)

- ☐ RBC-UY42P-UL: 1 Way Cassette Panel / Grille
- ☐ TCB-SIR41UYYP-UL: Occupancy Sensor
- ☐ RBC-AX33UYYP-UL: Wireless Controller Kit
- ☐ RBC-AMS54E-UL / RBC-AWSU52-UL: Wired Remote Controller

# DIMENSIONAL DRAWING

## INDOOR UNIT 1-WAY CASSETTE MMU-UB0151YHP-UL

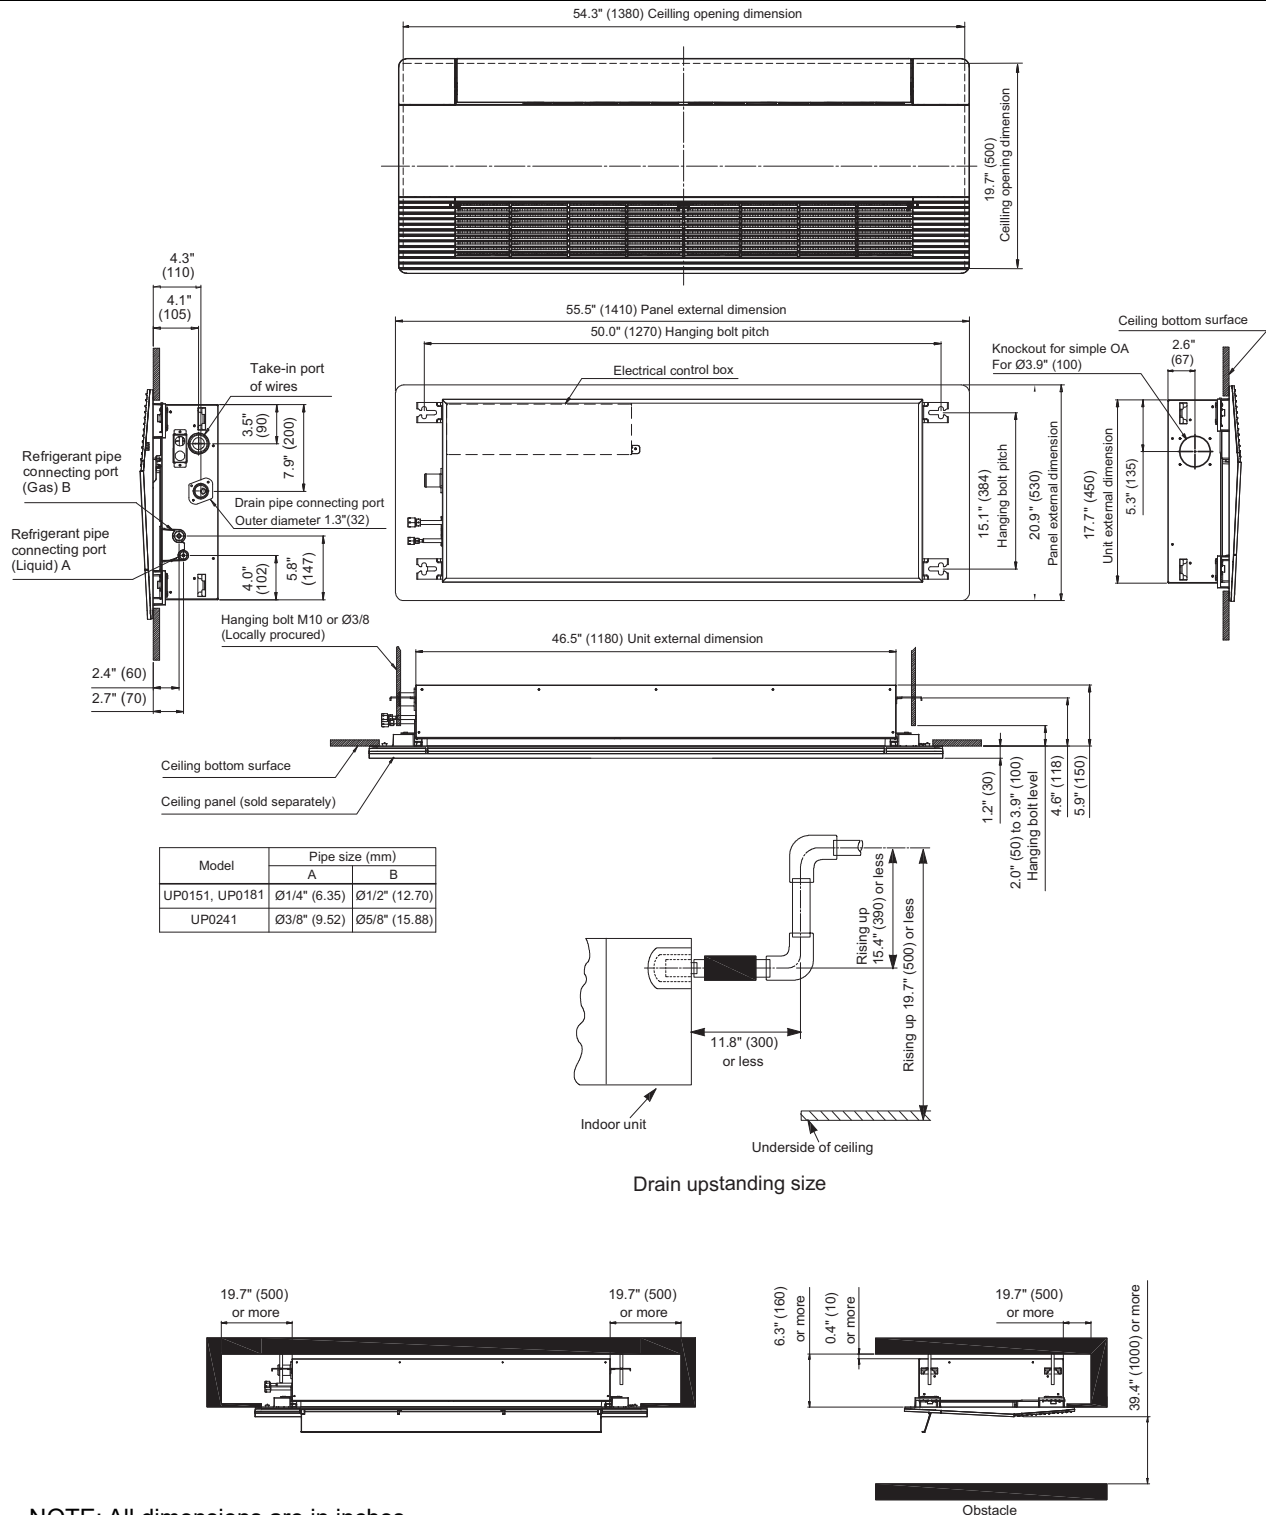

NOTE: All dimensions are in inches.

The space that is necessary for equipping and service

