SMMSe / SHRMe VRF Indoor Unit MMC-AP0488HPUL—Underceiling

TOSHIBA Carrier

Submittal Data

Job Name _____ Location _____

Тад _____



SMMSe / SHRMe VRF Underceiling Features

- R-410A refrigerant
- Five sizes from 18,000 to 48,000 Btu/h
- Quiet operation, as low as 32 dBA
- · Vertical airflow can be set to swing or fixed position
- Auto or manually set three fan speeds
- · Easy to remove cleanable filter
- · Five-year parts limited warranty


INDOOR UNIT MODEL		MMC-AP0488HPUL		
PERFORMANCE				
Cooling Rated Capacity	Btu/h 48,000			
Heating Rated Capacity	Btu/h 54,000			
Fan Type (Qty)	Centrifugal (3)			
Air Flow (H / M / L)	CFM 1095 / 900 / 706			
Sound Pressure (H / M / L)	dBA	44 / 41 / 35		
FILTER (Included)				
Туре	Washable			
Quantity	2			
MERV rating	5			
Dimensions (W x L x D)	in. 9-3/4 x 29-1/8 x 1/2			
ELECTRICAL				
Power Supply	V/Ph/Hz	208-230/1/60		
Power Consumption (Input)	kW	kW 0.083		
Full Load Amps (FLA)	А	0.89		
Minimum Circuit Amps (MCA)	А	1.11		
Maximum Overcurrent Protection (MOCP)	А	15.0		

MOTOR				
Motor Type	DC			
Motor Watts	W	139		
PHYSICAL DATA				
Pipe Connection Size - Liquid (High Pressure)	in.	3/8 (Flare)		
Pipe Connection Size - Gas (Low Pressure)	in.	5/8 (Flare)		
Pipe Connection Size - Drain (OD)	in.	1		
Pipe Connection Size - Drain (ID)	in.	13/16		
Refrigerant		R-410A		
External Finish	Munsell N9.1			
Unit Width	in.	62-1/2		
Unit Height	in.	9-2/5		
Unit Depth	in.	27-1/5		
Net Weight	lb	89		

ACCESSORIES

- □ Wired Remote Controller (7-Day Programmable) RBC-AMS54E-UL
- □ Simple Wired Remote Control RBC-AS41UL
- □ Stand Alone Receiver with Wireless Remote TCB-AX32UL
- □ Integral Receiver with Wireless Remote RBC-AX33C-UL
- □ Remote Sensor TCB-TC41LUL
- □ Wired Remote Controller RBC-AMT32UL
- □ Elbow Piping Kit TCB-KP24CPE
- □ Condensate Drain Pump Kit TCB-DP31CE
- □ Auxiliary Outside Air Flange TCB-FF101URUL

DIMENSIONAL DRAWING INDOOR UNIT UNDERCEILING MMC-AP0488HPUL

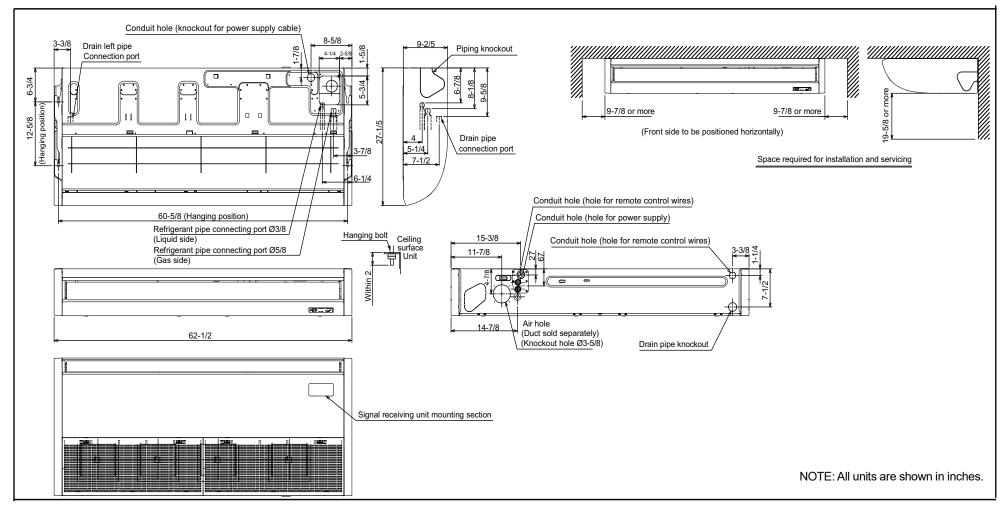



© Carrier Corporation 2021

Form MMC-AP0488HPUL 01