SMMSu / SHRMu VRF Indoor Unit MMU-UP0121YHP-UL—1-Way-Cassette



Submittal Data

Job Name	 Location	
-		



A210311

INDOOR UNIT MODEL	MMU-UP0121YHP-UL					
PERFORMANCE						
Cooling Rated Capacity	Btu/h	12,000				
Heating Rated Capacity	Btu/h	13,500				
Fan Type	Cross Flow Fan					
Airflow (H, M, L)	CFM	315 / 245 / 170				
Sound Pressure (H, M, L)	dBA	40 / 36 / 26				
ELECTRICAL						
Power Supply	V/Ph/Hz	208-230/1/60				
Power Consumption (Input)	W	19				
Full Load Amps (FLA)	Α	0.32				
Minimum Circuit Amps (MCA)	Α	0.40				
Maximum Overcurrent Protection (MOCP)	Α	15.0				
MOTOR						
Motor Type	DC					
Motor Watts	W	30				

SMMSu / SHRMu VRF 1-Way Cassette Features


- R-410A refrigerant
- Six sizes from (7,500-24,000 btu/h)
- · Quiet operation, as low as 25 dBA
- · One directional louver control
- · Washable filter included
- · Optional wired or wireless controllers
- Standard condensate lift mechanism with 15.4 in. lift capacity
- · Auto or manually set three fan speeds
- · Five-year parts limited warranty

PHYSICAL DATA				
Pipe Connection Size - Liquid (High Pressure)	in.	1/4 (Flare)		
Pipe Connection Size - Gas (Low Pressure)	in.	3/8 (Flare)		
Pipe Connection Size - Drain (OD)	in.	VP25		
Refrigerant		R-410A		
External Finish Zin		nc Hot Dipped Steel Plate		
Ceiling Panel Color	Mun	sell 2.5GY9.0/0.5		
Unit Width	in.	39		
Unit Height	in.	5-7/8		
Unit Depth	in.	17-3/4		
Unit Net Weight	lb	30.9		
PANEL		RBC-UY32P-UL		
Panel Width	in.	48		
Panel Height	in.	1-1/8		
Panel Depth	in.	21		
Panel Net Weight	lb	8.8		
FILTER (Included)				
Туре		Washable		
Quantity		1		
MERV Equivalent Rating		5		
Dimensions	in.	18-3/4 x 5-3/4 x 3/8		

ACCESSORIES (Optional)

- ☐ RBC-UY32P-UL: 1 Way Cassette Panel / Grille
- ☐ TCB-SIR41UYP-UL: Occupancy Sensor
- ☐ RBC-AX33UYP-UL: Wireless Controller Kit
- ☐ RBC-AMS54E-UL / RBC-AWSU52-UL: Wired Remote Controller

DIMENSIONAL DRAWING INDOOR UNIT 1-WAY CASSETTE MMU-UP0121YHP-UL

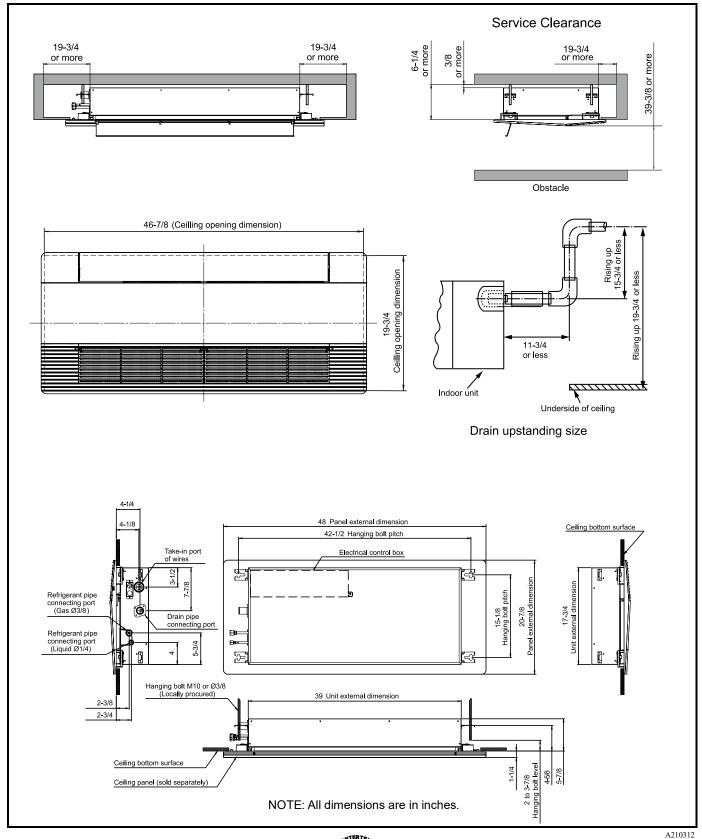



A Carrier Company