


SMMSu / SHRMu VRF Indoor Unit MMU-UP0151MHP-UL—Compact 4-Way-Cassette

TOSHIBA
Carrier

Submittal Data

Job Name _____ Location _____
Tag _____

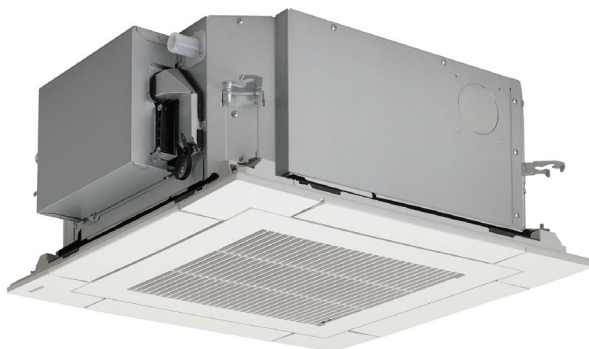

SMMSu / SHRMu VRF Compact 4-Way Cassette Features

- R-410A refrigerant
- Five sizes from 7,500 to 18,000 Btu/h
- Standard condensate pump with 25.0 in. lift capacity
- Quiet operation (as low as 31 dBA)
- Independent louver control (fixed or swing)
- Optional wired or wireless controls
- Auto or manually set five fan speeds
- Easy to remove cleanable filter
- Five-year parts limited warranty


INDOOR UNIT MODEL		MMU-UP0151MHP-UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	15,400
Heating Rated Capacity	Btu/h	17,000
Fan Type (Qty)		Turbo (1)
Airflow (H / M / L)	CFM	390 / 290 / 230
Sound Pressure (H / M / L)	dBA	37 / 33 / 29
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	kW	0.031
Full Load Amps (FLA)	A	0.52
Minimum Circuit Amps (MCA)	A	0.65
Maximum Overcurrent Protection	A	15
MOTOR		
Motor Type		DC Inverter Driven
Motor Watts	W	60

PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	1/4 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	1/2 (Flare)
Pipe Connection Size - Drain (OD)	in.	1-1/4
Pipe Connection Size - Drain (ID)	in.	1
Refrigerant		R-410A
External Finish		Mansell 5PB9/1
Unit Width	in.	22-5/8
Unit Height	in.	10-1/8
Unit Depth	in.	22-5/8
Unit Net Weight	lb	35.30
Panel Width	in.	24-3/8
Panel Height	in.	2-1/4
Panel Depth	in.	24-3/8
Panel Net Weight	lb	6.60

ACCESSORIES (Optional)

- ☐ Wired Remote Controller (7-Day Programmable) - RBC-AWSU52-UL
- ☐ Simple Wired Remote Control - RBC-ASCU11-UL
- ☐ Wireless Remote Control Kit RBC-AXU31IM-UL, RBC-AXU31UMP-UL, RBC-AXU31UMPB-UL
- ☐ Remote Sensor TCB-TC41U-UL
- ☐ Grille Panel RBC-UM21PG-UL, RBC-UM21P-UL, RBC-UM21PB-UL
- ☐ Occupy Sensor TCB-SIR41UM-E and TCB-SIR41UMP-UL
- ☐ Auxiliary Fresh Air Flange TCB-FF101URUL

DIMENSIONAL DRAWING INDOOR UNIT COMPACT 4-WAY CASSETTE MMU-UP0151MHP-UL

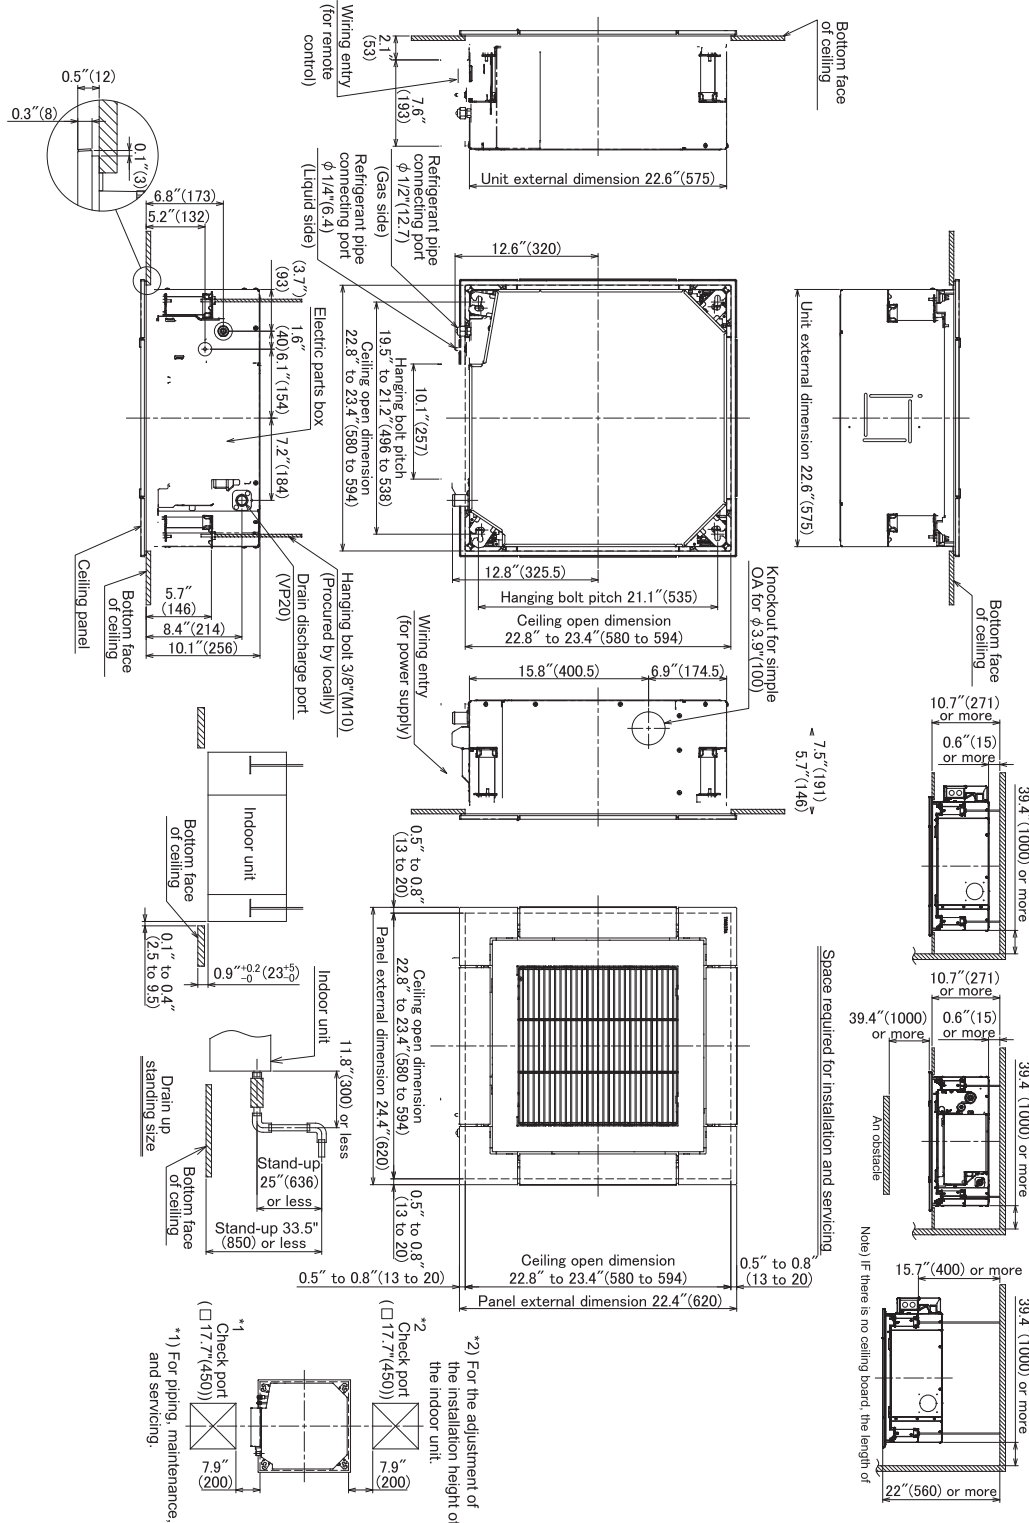

Units are shown in inches (mm)

