


VRF Indoor Unit 45VMM036---3—Medium Static Duct



Submittal Data

Job Name _____ Location _____
Tag _____

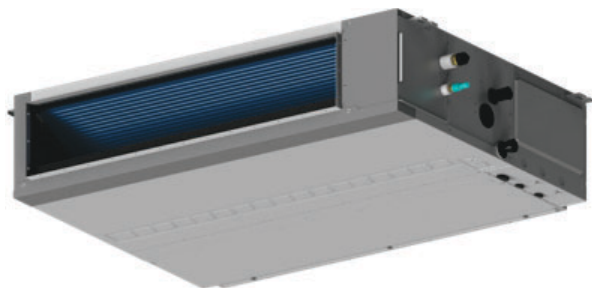

STANDARD FEATURES

- Rear Return Air Opening is Standard and Bottom Return is Optional
- Three Fan Speeds - High, Medium, and Low
- Knockout for Outside Air
- Built-in Condensate Lift Mechanism (27-1/2")
- Built in EXV (Electronic Expansion Valve) for Installation
- Internally Installed A2L Refrigerant Leak Sensor

INDOOR UNIT MODEL		45VMM036---3
PERFORMANCE		
Total Cooling Rated Capacity	Btu/h	36,000
Total Heating Rated Capacity	Btu/h	42,000
Airflow (H / M / L)	CFM	1195 / 1000 / 804
Sound Pressure (H / M / L)	dBA	45.9 / 41.9 / 37.1
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	240
Minimum Circuit Amps (MCA)	A	3.27
Maximum Overcurrent Protection	A	15
Motor Type		DC


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8
Pipe Connection Size - Suction	in.	5/8
Pipe Connection Size - Drain	in.	1
External Static Pressure (ESP)	in. wg	0.32 (0-0.64)
Refrigerant		R-454B
Unit Width	in.	58-7/16
Unit Height	in.	9-5/8
Unit Depth	in.	31-7/8
Net Unit Weight	lb	116.8

ACCESSORIES


- ☐ Wireless Remote Controller 45VM900001
☐ Wired Remote Controller - Non-Prog. 45VM900002

DIMENSIONAL DRAWING **INDOOR UNIT MEDIUM STATIC DUCT 45VMM036---3**


External dimension, air outlet size, and size of fresh air outlet:

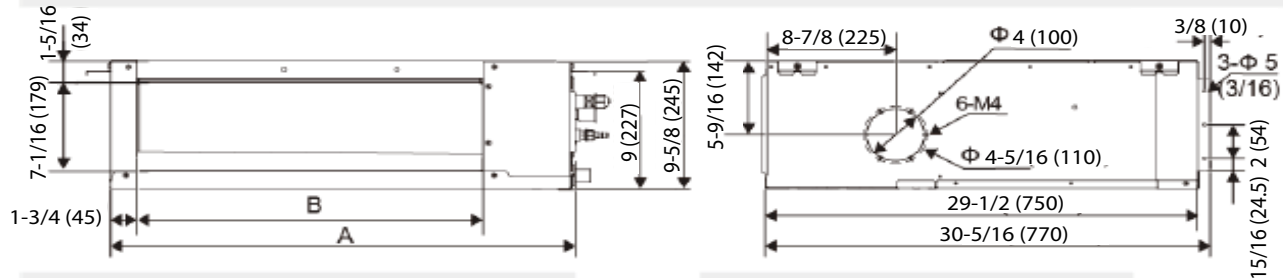


Size of return air inlet (back return air mode):

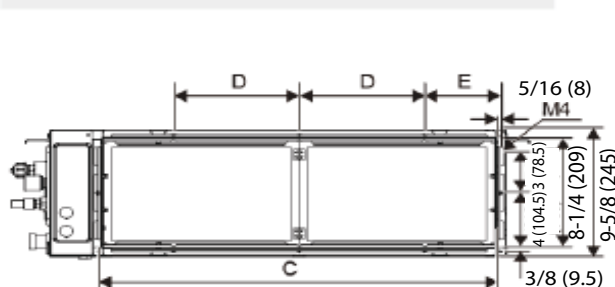

Dimension of pipe and water pipe:

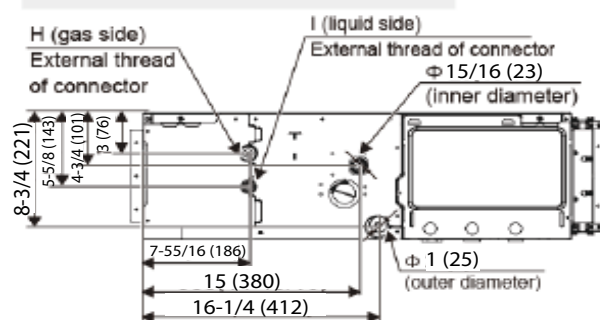

Size of return air inlet (bottom return air mode), and the distance between the lugs:

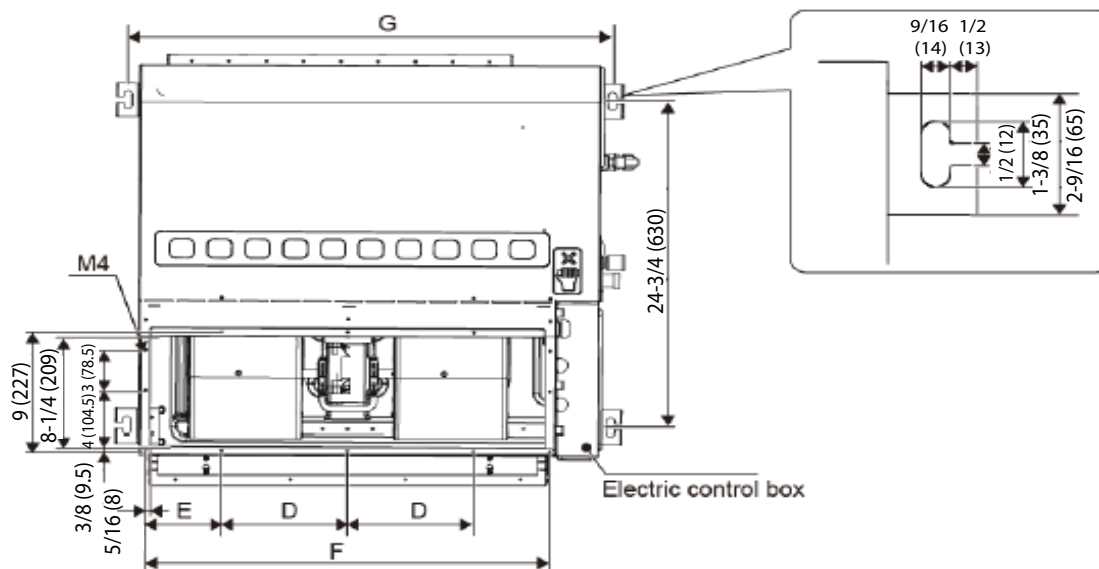

Capacity (kBtu/h)	A	B	C	D	E	F	G	H	I
36	55 (1400)	47-1/4 (1200)	50-3/4 (1290)	8-3/4 (220)	8-3/8 (213)	51-7/16 (1306)	56-7/8 (1445)	7/8-14 UNF	5/8-18 UNF

Note: All dimensions are shown in inches