

SMMSu VRF u-Series Outdoor Unit MMY-UP2641HT6P-UL—Heat Pump

TOSHIBA
Carrier

Submittal Data

Job Name _____ Location _____

Tag _____



A230331

SMMSu VRF Heat Pump Features

- Energy-efficient priority design
- Super-efficient heat exchanger
- Refrigerant cooling inverter system
- Intelligent VRF control
- Less refrigerant
- Space efficient design
- Configuration flexibility
- Wider Operating temperature range
- Comprehensive System construction solution
- Comprehensive Service solution

Header Unit Model		MMY-UP2641HT6P-UL
Outdoor Unit Model Name		MUP1681HT6P-UL + MUP0961HT6P-UL
PERFORMANCE		
Nominal Cooling Capacity†	Btu/h	264,000
Nominal Heating Capacity†	Btu/h	297,000
Maximum number of indoor units		47
Total Connected Indoor Unit Capacity		396
COOLING EFFICIENCY†		
EER (Non-Ducted)	Btu/Wh	10.30
Power Consumption (Non-Ducted)	kW	23.90
EER (Ducted)	Btu/Wh	10.30
Power Consumption (Ducted)		22.23
HEATING EFFICIENCY†		
COP (Non-Ducted)	Btu/Wh	3.74
Power Consumption (Non-Ducted)	kW	21.70
COP (Ducted)	Btu/Wh	3.82
Power Consumption (Ducted)	kW	19.55
FAN		
Fan Type		Propeller
Airflow	CFM	8670 + 6180
Motor Output	kW	0.73 x 2 + 0.59 x 1
ELECTRICAL		
Power Supply	V/Ph/Hz	460/3/60
MCA	A	27.4 + 17.5
MOCP	A	40.0 + 20.0

COMPRESSORS

Type (Number)	Hermetic Twin Rotary (1) + Hermetic Triple Rotary (1)	
Motor Output	kW	12.10 + 6.24

PHYSICAL DATA

Pipe Connection Size - Liquid (High Pressure)	in.	5/8 (Brazing)	1/2 (Brazing)
Pipe Connection Size - Gas (Low Pressure)	in.	1-1/8 (Brazing)	7/8 (Brazing)
Refrigerant		R-410A	
Factory Charge††	lb	19.8 + 13.2	
External Finish		Munsell 1Y8.5/0.5	
Unit Width	in.	51.4 + 39.6	
Unit Height	in.	66.5 + 66.5	
Unit Depth	in.	31.1 + 31.1	
Unit Net Weight	lb	774 + 533	

LEGEND

EER	—	Energy Efficiency Ratio
COP	—	Coefficient of Performance
MCA	—	Minimum Circuit Amps
MOCP	—	Maximum Overcurrent Protection


†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db

Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

††Additional charge required.

OUTDOOR UNIT HEAT PUMP MMY-UP2641HT6P-UL DIMENSIONAL DRAWING

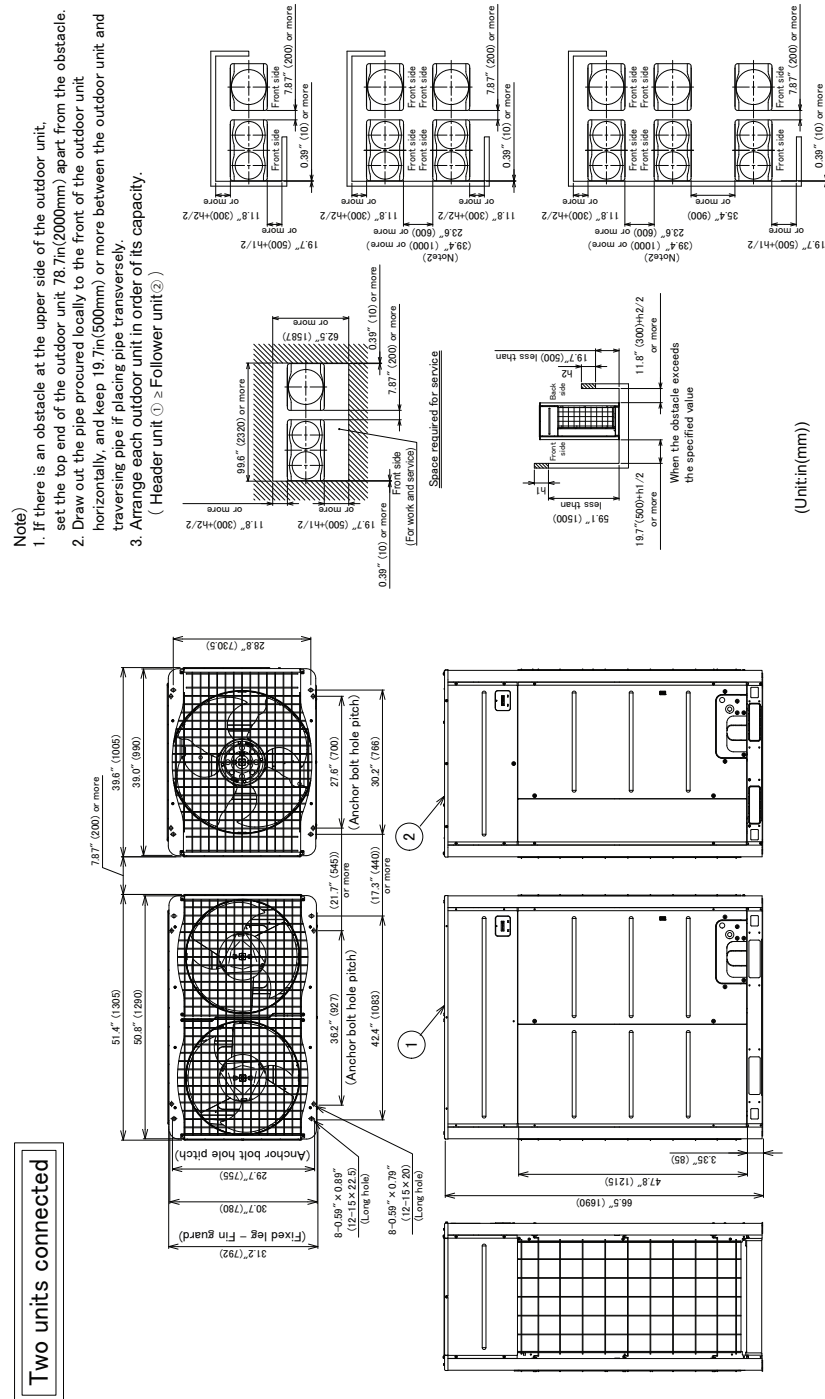

(Unit:in(mm))

Model name	Outdoor unit	
	① Header unit	② Follower unit
MMY-JP2641HT6P-J1	MMY-MJP1681HT6P-J1	MMY-MJP0961HT6P-J1

