

# VRF Indoor Unit 40VMF036A--3—4-Way Cassette



## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_



### STANDARD FEATURES

- Delivers air in all four directions
- Knock out for OA opening
- Louver control (fixed or swing)
- Three fan speeds - high, medium, and low
- Built-in condensate lift mechanism
- Built in EXV (Electronic Expansion Valve) for installation ease

INDOOR UNIT MODEL		40VMF036A--3
PERFORMANCE		
Total Cooling Rated Capacity	Btu/h	36,510
Sensible Cooling Capacity	Btu/h	23,040
Total Heating Rated Capacity	Btu/h	40,000
Airflow (H / M / L)	CFM	1100 / 950 / 800
Sound Pressure (H / M / L)	dBA	53.9 / 50.4 / 47.3
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	182.7
Minimum Circuit Amps (MCA)	A	2.3
Maximum Overcurrent Protection	A	15.0
Motor Type		DC


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	1-1/4 (OD)
Refrigerant		R-410A
Unit Width	in.	33-1/8
Unit Height	in.	11-3/4
Unit Depth	in.	33-1/8
Unit Net Weight	lbs.	69
Panel Width	in.	37-3/8
Panel Height	in.	1-3/4
Panel Depth	in.	37-3/8
Panel Net Weight	lbs.	13.2

### ACCESSORIES

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006


Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

# **DIMENSIONAL DRAWING** **INDOOR UNIT 4-WAY CASSETTE 40VMF036A--3**

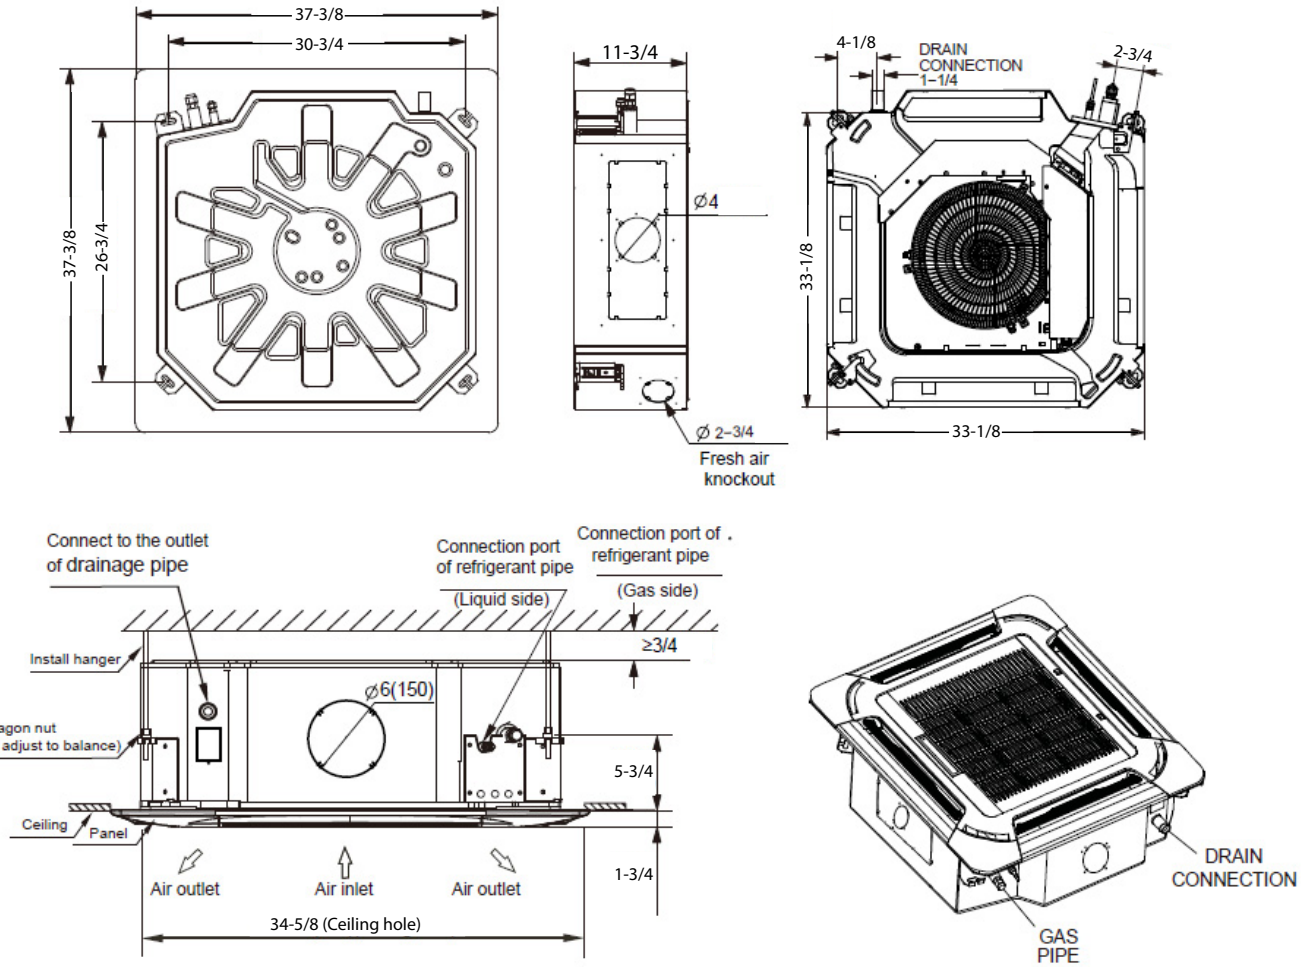

Dimensions are shown in inches.

## Recommended Service Clearance

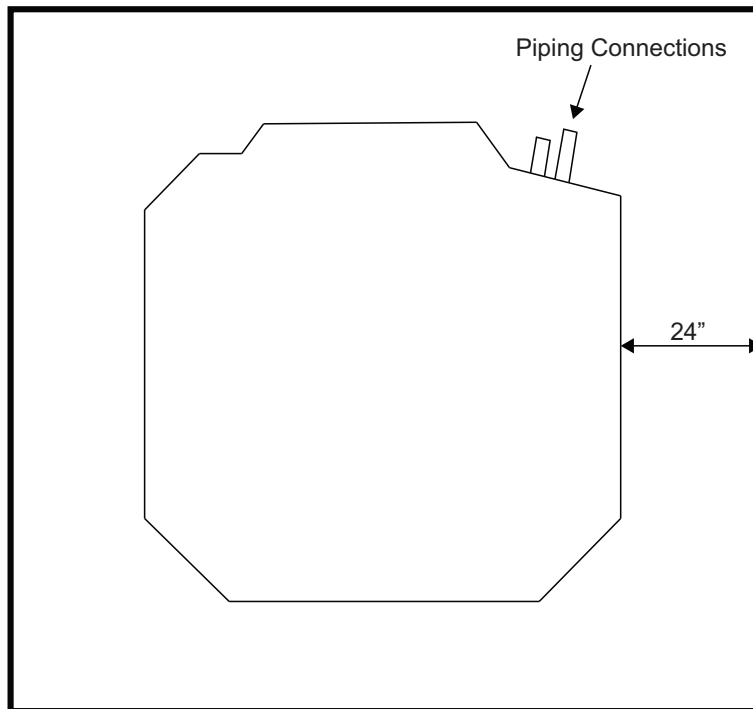

## Recommended Airflow Clearance

