SMMSu / SHRMu VRF Indoor Unit MMD-UB0481BHP-UL—Concealed Duct

TOSHIBA Carrier

Submittal Data

Job Name _____ Location _____ Тад _____



SMMSu / SHRMu CONCEALED DUCT FEATURES

- R-454B Refrigerant
- Twelve sizes from 7,500 to 54,000 Btu/h
- Standard condensate pump with 24.3 in. lift capability
- · Quiet operation, as low as 30 dBA
- · Rear return configurable for bottom return
- · Auto or manually set three fan speeds
- · Five-year parts limited warranty

INDOOR UNIT MODEL								
PERFORMANCE								
Btu/h	48,000							
Btu/h	54,000							
	Centrifugal (1)							
in	0.6 (Factory default)							
	0.8 (Max)							
CFM	1175 / 1025 / 885							
dBA	47 / 42 / 38							
ELECTRICAL								
V/Ph/Hz	208-230/1/60							
kW	0.34							
А	2.85							
А	3.56							
А	15.0							
	Btu/h in. CFM dBA V/Ph/Hz kW A A							

	DC		
	250		
in.	3/8 (Flare)		
in.	5/8 (Flare)		
in.	VP25		
	R-454B		
Zinc H	Hot Dipped Steel Plate		
in.	55-1/8		
in.	10-7/8		
in.	29-1/2		
lb	93		
	in. in. Zinc H in. in.		

ACCESSORIES

- □ Wired Remote Controller (7-Day Programmable) RBC-AWSU52-UL
- □ Simple Wired Remote Control RBC-ASCU11-UL
- □ Remote Sensor TCB-TC41U-UL
- □ Auxiliary OA Flange TCB-FF151US-UL
- □ Zoning Duct Flange TCB-SF56C6BP-UL
- □ Filter Kit TCB-FW561DP-UL

* The actual values in an external operating environment are generally higher than the indicated values due to ambient noise.


	C	202	5	Carrier.	All	rights	reserved
7		ş		~			

Edition Date: 02/25 Printed in U.S.A.

A Carrier Company

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

DIMENSIONAL DRAWING CONCEALED DUCT MMD-UB0481BHP-UL

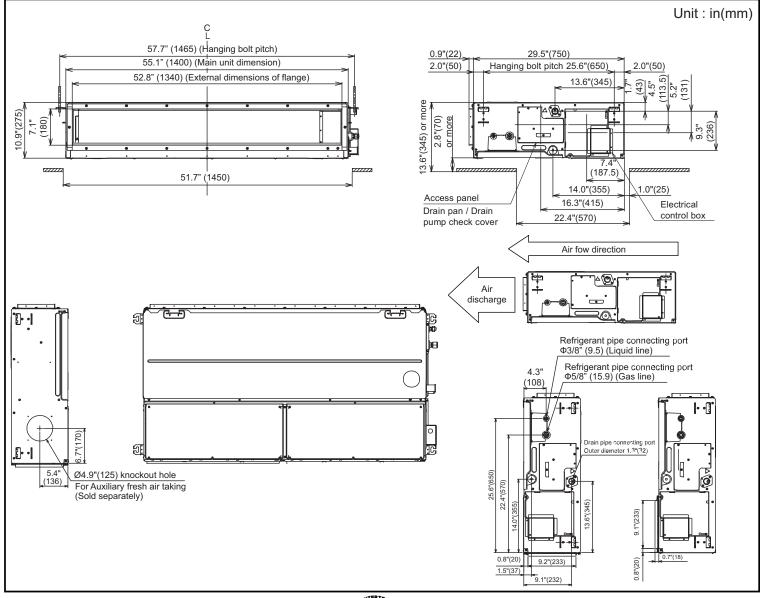



© 2025 Carrier. All rights reserved.

Printed in U.S.A.

Form No: MMD-UB0481BHP-UL 01

Replaces: New

A Carrier Company

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.