SMMSu / SHRMu VRF Indoor Unit MMU-UP0241YHP-UL—1-Way-Cassette



Submittal Data

Job Name	 Location	
-		



A210311

INDOOR UNIT MODEL	MMU-UP0241YHP-UL					
PERFORMANCE						
Cooling Rated Capacity	Btu/h	24,000				
Heating Rated Capacity	Btu/h	27,000				
Fan Type		Cross Flow Fan				
Airflow (H, M, L)	CFM	555 / 450 / 355				
Sound Pressure (H, M, L)	dBA	40 / 36 / 26				
ELECTRICAL						
Power Supply	V/Ph/Hz	208-230/1/60				
Power Consumption (Input)	W	42				
Full Load Amps (FLA)	Α	0.80				
Minimum Circuit Amps (MCA)	Α	1.00				
Maximum Overcurrent	Α	15.0				
Protection (MOCP)	^	13.0				
MOTOR						
Motor Type	DC					
Motor Watts	W	59				

SMMSu / SHRMu VRF 1-Way Cassette Features


- R-410A refrigerant
- Six sizes from (7,500-24,000 btu/h)
- · Quiet operation, as low as 25 dBA
- · One directional louver control
- · Washable filter included
- · Optional wired or wireless controllers
- Standard condensate lift mechanism with 15.4 in. lift capacity
- · Auto or manually set three fan speeds
- · Five-year parts limited warranty

PHYSICAL DATA					
Pipe Connection Size - Liquid (High Pressure)	in.	3/8 (Flare)			
Pipe Connection Size - Gas (Low Pressure)	in.	5/8 (Flare)			
Pipe Connection Size - Drain (OD)	in.	VP25			
Refrigerant		R-410A			
External Finish	Zinc Hot Dipped Steel Plate				
Ceiling Panel Color	Munsell 2.5GY9.0/0.5				
Unit Width	in.	46-3/8			
Unit Height	in.	5-7/8			
Unit Depth	in.	17-3/4			
Unit Net Weight	lb	35.2			
Panel Width	in.	55-1/2			
Panel Height	in.	1-1/8			
Panel Depth	in.	20-7/8			
Panel Net Weight	lb	11			
FILTER (Included)					
Туре		Washable			
Quantity	1				
MERV Equivalent Rating	5				
Dimensions	in.	18-3/4 x 5-3/4 x 3/8			

ACCESSORIES (Optional)

- ☐ RBC-UY42P-UL: 1 Way Cassette Panel / Grille
- $\hfill \square$ TCB-SIR41UYP-UL: Occupancy Sensor
- ☐ RBC-AX33UYP-UL: Wireless Controller Kit
- ☐ RBC-AMS54E-UL / RBC-AWSU52-UL: Wired Remote Controller

DIMENSIONAL DRAWING INDOOR UNIT 1-WAY CASSETTE MMU-UP0241YHP-UL

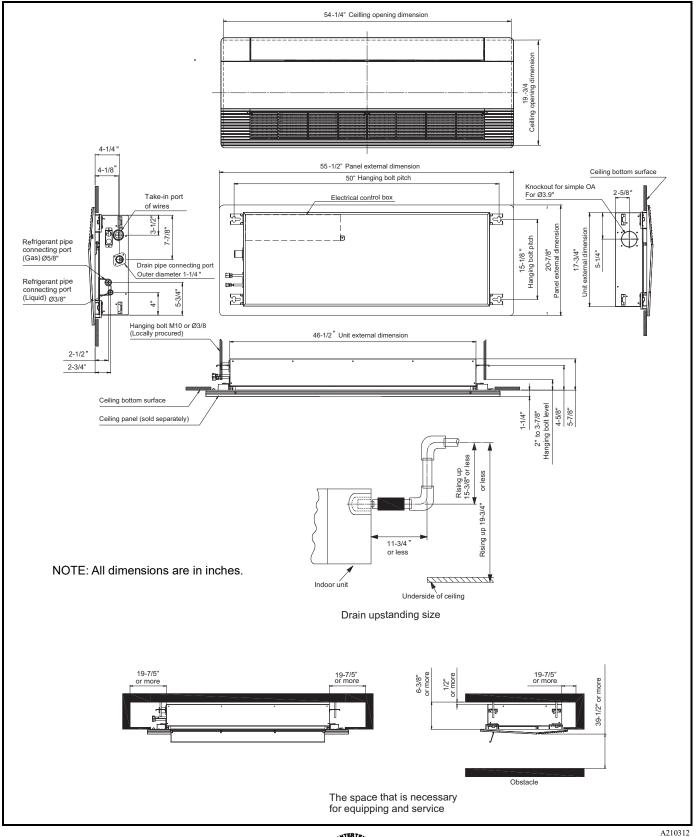



A Carrier Company