VRF Indoor Unit 45VMW030---3 — High Wall



Submittal Data

Job Name _	 Location	
Tan		



STANDARD FEATURES

- Dual Guided Air Design Provides Smoother and More Comfortable Air Flow
- · Three Fan Speeds High, Medium and Low
- Front Panel Lifts Up 65 Degrees Providing Ease of Maintenance
- Heating Mode, Swing Angle for Louver is 68 to 110 Degrees in Auto Mode
- Non-Heating Mode, Swing Angle for Louver is 61 to 93 Degrees in Auto Mode
- Manual Setting for Louver, Swing Angle Between 61 and 110 Degrees
- Multi-Refrigerant Outlet Piping Methods Left, Right or Rear
- Built in EXV (Electronic Expansion Valve) for Installation Ease
- · Internally Installed A2L Refrigerant Leak Sensor

Indoor Unit Model	45VMW0303				
PERFORMANCE					
Total Cooling Rated	Btu/h	30,000			
Capacity	Dtu/II				
Total Heating Rated	Btu/h	34,000			
Capacity	Dtu/11				
Airflow (H / M / L)	CFM	941 / 713/ 485			
Sound Pressure (H / M / L)	dBA	52.1 / 44.6 / 35.7			
ELECTRICAL					
Power Supply	V/Ph/Hz	208-230/1/60			
Indoor Fan Motor Rated	W	50			
Motor (Output)	VV				
Minimum Circuit Amps	Α	1.44			
Maximum Overcurrent	Α	15			
Protection	^				
Motor Type		DC			


PHYSICAL DATA				
Pipe Connection Size - Liquid	in.	3/8		
Pipe Connection Size - Suction	in.	5/8		
Pipe Connection Size - Drain	in.	5/8		
Refrigerant		R-454B		
Unit Width	in.	47-1/4		
Unit Height	in.	11-5/8		
Unit Depth	in.	10-7/16		
Unit Net Weight	lb	34		

ACCESSORIES (Optional)

- ☐ Wireless Remote Controller 45VM900001
- ☐ Wired Remote Controller Non-Prog. 45VM900002

© 2025 Carrier. All rights reserved. Edition Date: 04/25 Form No: 45VMW030---3-C-01SD

DIMENSIONAL DRAWING INDOOR UNIT HIGH WALL 45VMW030---3

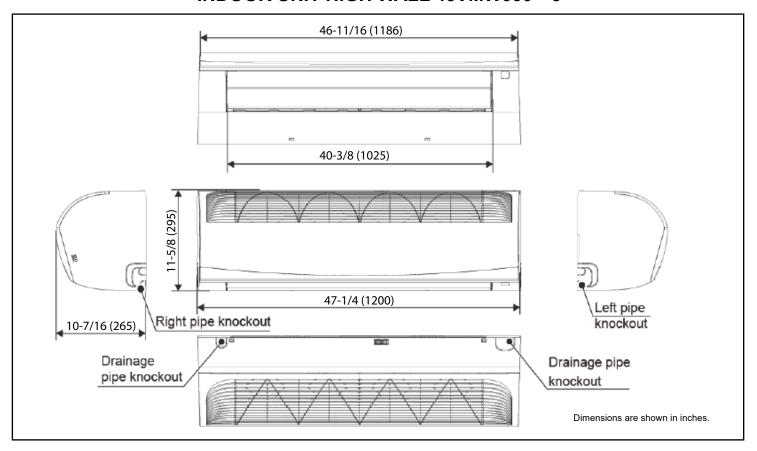



Form No: 45VMW030---3-C-01SD