

Residential & Light Commercial Heat Pump System

TOSHIBA
Carrier

Indoor Model: RAV-SM302KRTP-UL
Outdoor Model: RAV-SP302AT2P-UL

Submittal Data

Job Name _____ Location _____
Tag _____



A221038

OUTDOOR UNIT STANDARD FEATURES

- Digital inverter compressor technology
- System can operate in cooling only mode with heating locked out
- Line lengths up to 246 ft
- Low-ambient cooling down to 5°F
- System diagnostics

OUTDOOR UNIT MODEL		RAV-SP302AT2P-UL
SYSTEM PERFORMANCE		
Nominal Cooling Capacity†	Btu/h	30,000
SEER2		23.60
EER2		13.10
Nominal Heating Capacity†	Btu/h	34,000
HSPF2		9.50
COP2		3.40
REFRIGERANT LINES		
Total Piping Length	ft	246
Vertical Lift	ft	98
Suction Line Size	in	5/8
Liquid Line Size	in	3/8
AMBIENT OPERATING RANGE		
Cooling DB Min ~ Max*	F	-13~115
Heating DB Min ~ Max	F	-13~59
REFRIGERANT		R410A
FACTORY CHARGE	lbs	6.80

AIRFLOW		
Cooling	CFM	3570
Heating	CFM	2870
SOUND PRESSURE LEVEL		
Cooling	db(A)	54
Heating	db(A)	54
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Minimum Circuit Amps (MCA)	A	30
Recommended Fuse Size	A	40
Maximum Over Current Protection (MOCP)	A	40
PHYSICAL DATA		
Unit Width	in	35-3/8
Unit Height	in	52-3/4
Unit Length	in	12-5/8
Unit Weight - Net / Gross	lbs	218 / 232

Legend

db — Dry Bulb
SEER — Seasonal Energy Efficiency Ratio
HSPF — Heating Seasonal Performance Factor
wb — Wet Bulb

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 210/240 Standard.
Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db
Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

* Requires wind baffle to operate in cooling mode down to -13°F



A221021

RAV-SM302KRTP-UL HIGH WALL FEATURES

- R-410A refrigerant
- Five sizes from 12,000 to 36,000 Btu/h
- Quiet operation (as low as 41 dBA)
- Auto or manually set three fan speeds
- Easy to remove cleanable filter

INDOOR UNIT MODEL		RAV-SM302KRTP-UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	30,000
Heating Rated Capacity	Btu/h	40,000
Fan Type (Qty)		Turbo (1)
Airflow (H/M/L)	CFM	940/825/705
Sound Pressure (H/M/L)	dBA	48/45/41
ELECTRICAL		
Power Supply	V/Ph/Hz	From ODU
FILTER		
Type		Washable
Quantity		2
MERV Corresponding Value		5
Dimensions (W x L x D)	in.	16-1/2 x 19-5/8 x 1/16


PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in	3/8 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in	5/8 (Flare)
Condensate Drain Connection	in	7/8
External Finish		Munsell 2.5YG9.0/0.5
Unit Width	in	47-1/4
Unit Height	in	13-3/4
Unit Depth	in	11.0
Unit Net Weight	lb	44
MOTOR		
Motor Type		DC
Motor Watts	W	61

ACCESSORIES

- ☐ Wired Remote Controller (7-Day Programmable) RBC-AMS54E-UL
- ☐ Simple Wired Remote Controller RBC-AS41UL
- ☐ Remote Sensor TCB-TC41LUL
- ☐ Wired Remote Controller RBC-AMT32UL
- ☐ Condensate Drain Pipe Kit 53DS-900---118

DIMENSIONAL DRAWING

OUTDOOR UNIT RAV-SP302AT2P-UL

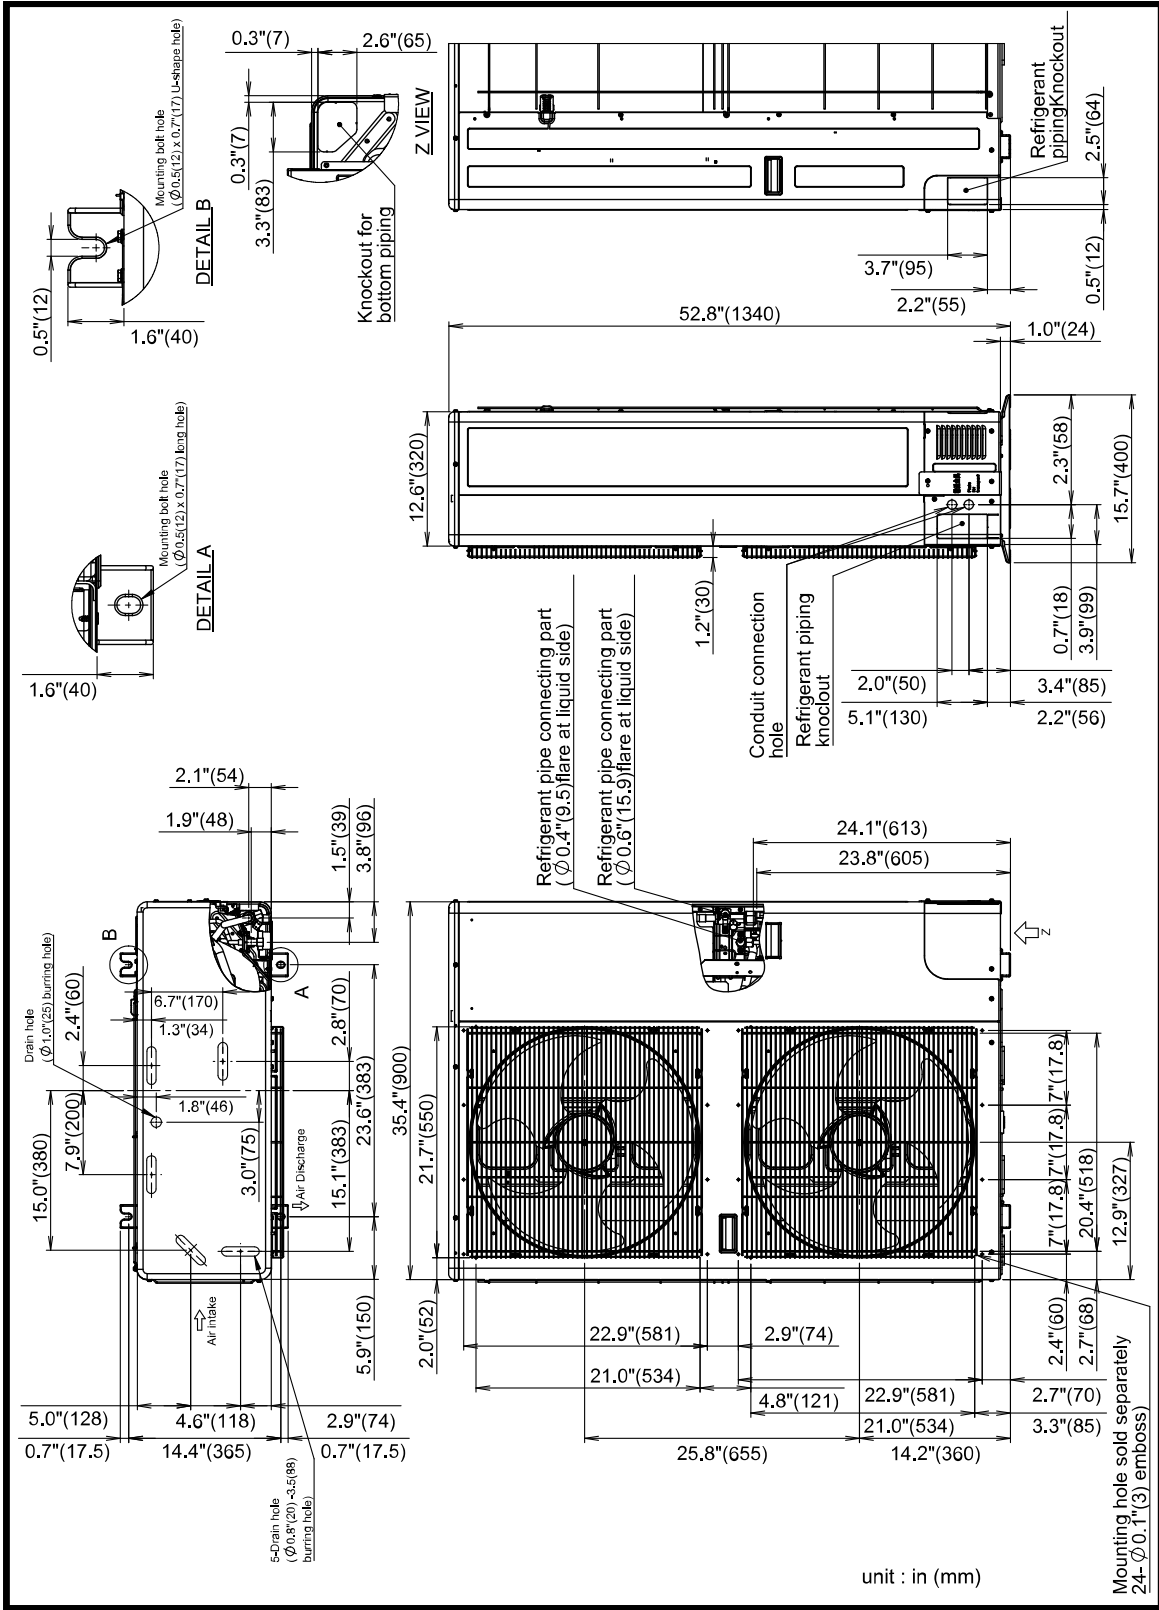

unit : in (mm)


Mounting hole sold separately
24- $\varnothing 0.1$ "(3) emboss)

A221039



DIMENSIONAL DRAWING

INDOOR UNIT HIGH WALL RAV-SP302KRTP-UL

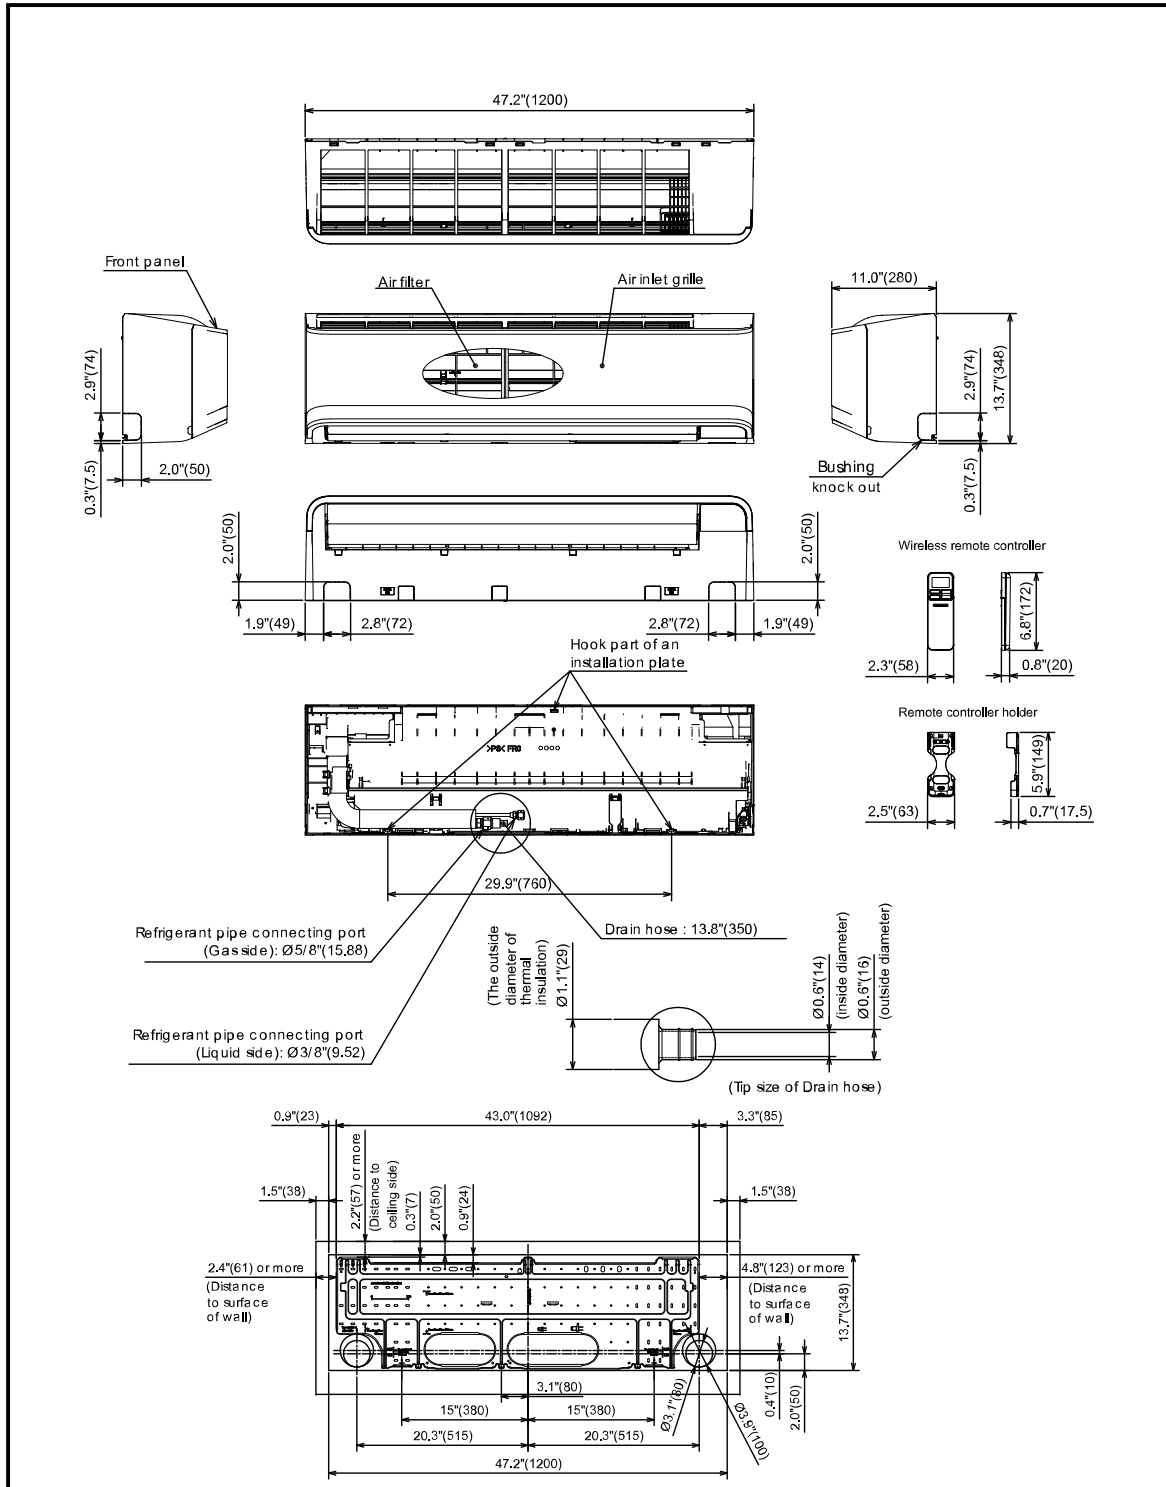

A221051

