


VRF Outdoor Unit MMY-UP288H1FT6P-UL - Elite Heat

TOSHIBA
Carrier

Submittal Data

Job Name _____ Location _____
Tag _____

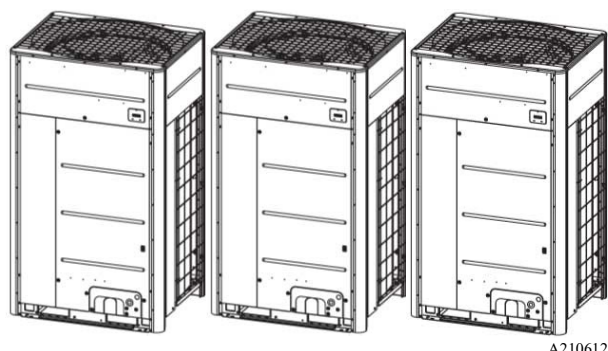

A210612

Elite Heat Heat Recovery Features

- Modules and pairings available from 6 to 30 tons
- Modules have inverter-driven rotary compressors
- Direct-drive, inverter-driven outdoor motor
- Up to 3937 ft actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil

- Operating temperature range
Cooling (db): -10° to 125°F (-15° to 52°C)
Heating (wb): -30° to 60°F (-25° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

SCHE — Simultaneous Cooling and Heating Efficiency

Combination Model		MMY-UP288H1FT6P-UL
Header Unit Model		MMY-MUP096H1FT6PUL
Follower Unit Model		MMY-MUP096H1FT6PUL
Follower Unit Model		MMY-MUP096H1FT6PUL
PERFORMANCE		
Nominal Cooling Capacity	Btu/h	288,000
Nominal Heating Capacity	Btu/h	324,000
Maximum Number of Indoor Units		51
SIMULTANEOUS COOLING AND HEATING EFFICIENCY†		
SCHE, Ducted FCUs		25.80
SCHE, Ductless FCUs		26.00
COOLING EFFICIENCY†		
EER/IEER, Ducted FCUs	Btu/Wh	11.6/19.8
Power Consumption, Ducted FCUs	kW	23.50
EER/IEER, Ductless FCUs	Btu/Wh	12.6/21.0
Power Consumption, Ductless FCUs	kW	21.22
HEATING EFFICIENCY†		
COP at 47°F, Ducted FCUs		3.59
Power Consumption, Ducted FCUs	kW	25.07
COP at 47°F, Ductless FCUs		3.90
Power Consumption, Ductless FCUs	kW	22.47
Fan Type (Qty)		Propeller (3)
Airflow, Standard Range	CFM	7240 x 3
Sound Pressure	dBA	65.8
External Static Pressure*	in. wg	0.321

LEGEND

db	— Dry Bulb
COP	— Coefficient of Performance
EER	— Energy Efficiency Ratio
FCU	— Fan Coil Unit
IEER	— Integrated Energy Efficiency Ratio
wb	— Wet Bulb

ELECTRICAL		
Power Supply	V/Ph/Hz	460/3/60
Minimum Circuit Amps (MCA)	A	25 x 3
Maximum Overcurrent Protection (MOC)	A	30 x 3
COMPRESSORS		
Type (Number)		Hermetic Triple
FAN MOTOR		
Motor Output	kW	(0.38 x 2) x 3
PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	1/2 x 3 (Brazed)
Discharge - Gas (High/Low Pressure)		3/4 x 3 (Brazed)
Suction Gas	in.	7/8 x 3 (Brazed)
Refrigerant		R-410A
Factory Charge††	lb	19.8 x 3
Unit Width	in.	51-1/2 x 3
Unit Height	in.	66-1/2 x 3
Unit Depth	in.	31-1/4 x 3
Net Weight	lb	776 x 3

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db
Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

*Requires setting by menu functions.

††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.

DIMENSIONAL DRAWING

OUTDOOR UNIT MMY-UP288H1FT6P-UL

Three units connected

