
# **SHRMe RBM-Y0611FU4PUL–Multiport Flow**

# TOSHIBA Carrier

# Submittal Data

Job Name Tag \_

Location

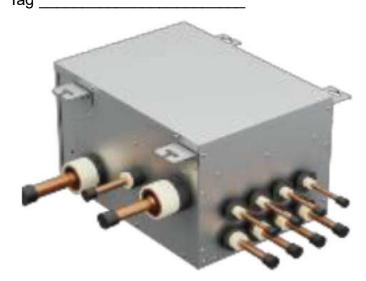

#### **Multiport Flow Selector Features**

- Maximum piping length between the indoor unit and the FS box is 115 ft.
- Multiple indoor units can be connected to one box. •

MODEL NAME	RBM-Y0611FU4PUL		
POWER SUPPLY		208-230/1/60	
MCA	A	0.75	
MOCP	A	15	
Connectible indoor unit capacity/port	kBtu/h	1 branch: below 61	
DIMENSIONS	Height (in)	11.5	
	Width (in)	13.3	
	Depth (in)	18.4	
TOTAL WEIGHT	lbs	46	
Connecting Port Diameter (Indoor Unit Side)	Liquid Side (in)	3/8	
	Gas Side (in)	5/8	
Connecting Port Diameter (Outdoor Unit Side)	Liquid Side (in)	5/8	
	Discharge Gas Side (in)	7/8	
	Suction Gas Side (in)	1-1/8	
Connection		Braze	

LEGEND


MCA MOCP

\_


Minimum Circuit Amps Maximum Over Current Protection

1

## MULTIPORT FLOW SELECTOR (RBM-Y0611FU4PUL) DIMENSIONS

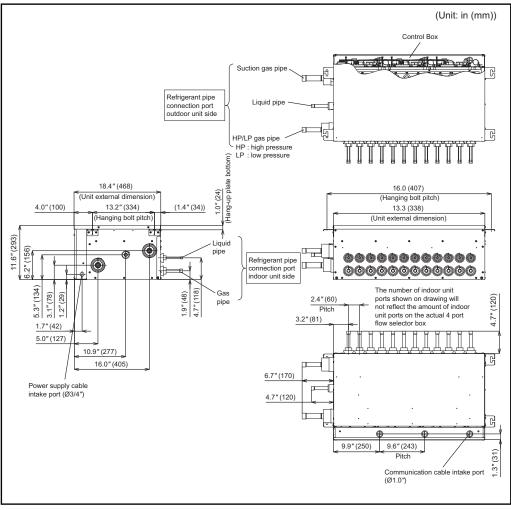

### MULTIPORT FLOW SELECTOR (RBM-Y0611FU4PUL) **CLEARANCES**

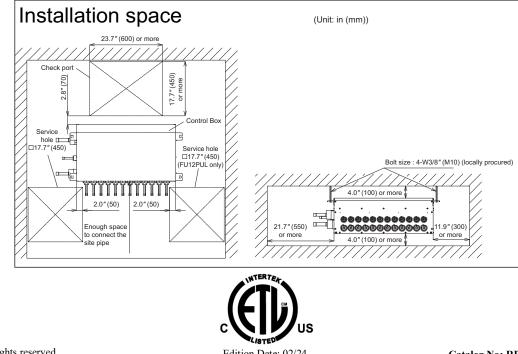

© 2024 Carrier. All rights reserved.

Edition Date: 02/24

Catalog No: RBM-Y0611FU4PUL-01SI

Replaces: New

Printed in USA Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.