

SMMSu / SHRMu VRF Indoor Unit MMU-UP0071YHP-UL—1-Way-Cassette

TOSHIBA
Carrier

Submittal Data

Job Name _____ Location _____
Tag _____



SMMSu / SHRMu VRF 1-Way Cassette Features

- R-410A refrigerant
- Six sizes from (7,500-24,000 btu/h)
- Quiet operation, as low as 25 dBA
- One directional louver control
- Washable filter included
- Optional wired or wireless controllers
- Standard condensate lift mechanism with 15.4 in. lift capacity
- Auto or manually set three fan speeds
- Five-year parts limited warranty

INDOOR UNIT MODEL		MMU-UP0071YHP-UL
PERFORMANCE		
Cooling Rated Capacity	Btu/h	7,500
Heating Rated Capacity	Btu/h	8,500
Fan Type	Cross Flow Fan	
Airflow (H, M, L)	CFM	295 / 230 / 160
Sound Pressure (H, M, L)	dBA	38 / 34 / 25
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption (Input)	W	17
Full Load Amps (FLA)	A	0.32
Minimum Circuit Amps (MCA)	A	0.40
Maximum Overcurrent Protection (MOCP)	A	15.0
MOTOR		
Motor Type	DC	
Motor Watts	W	30



PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	1/4 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	3/8 (Flare)
Pipe Connection Size - Drain (OD)	in.	VP25
Refrigerant	R-410A	
External Finish	Zinc Hot Dipped Steel Plate	
Ceiling Panel Color	Munsell 2.5GY9.0/0.5	
Unit Width	in.	39
Unit Height	in.	5-7/8
Unit Depth	in.	17-3/4
Unit Net Weight	lb	30.9
PANEL	RBC-UY32P-UL	
Panel Width	in.	48
Panel Height	in.	1-1/8
Panel Depth	in.	21
Panel Net Weight	lb	8.8
FILTER (Included)		
Type	Washable	
Quantity	1	
MERV Equivalent Rating	5	
Dimensions	in.	18-3/4 x 5-3/4 x 3/8

ACCESSORIES (Optional)

- ☐ RBC-UY32P-UL: 1 Way Cassette Panel / Grille
- ☐ TCB-SIR41UY-UL: Occupancy Sensor
- ☐ RBC-AX33UY-UL: Wireless Controller Kit
- ☐ RBC-AMS54E-UL / RBC-AWSU52-UL: Wired Remote Controller

DIMENSIONAL DRAWING

INDOOR UNIT 1-WAY CASSETTE MMU-UP0071YHP-UL

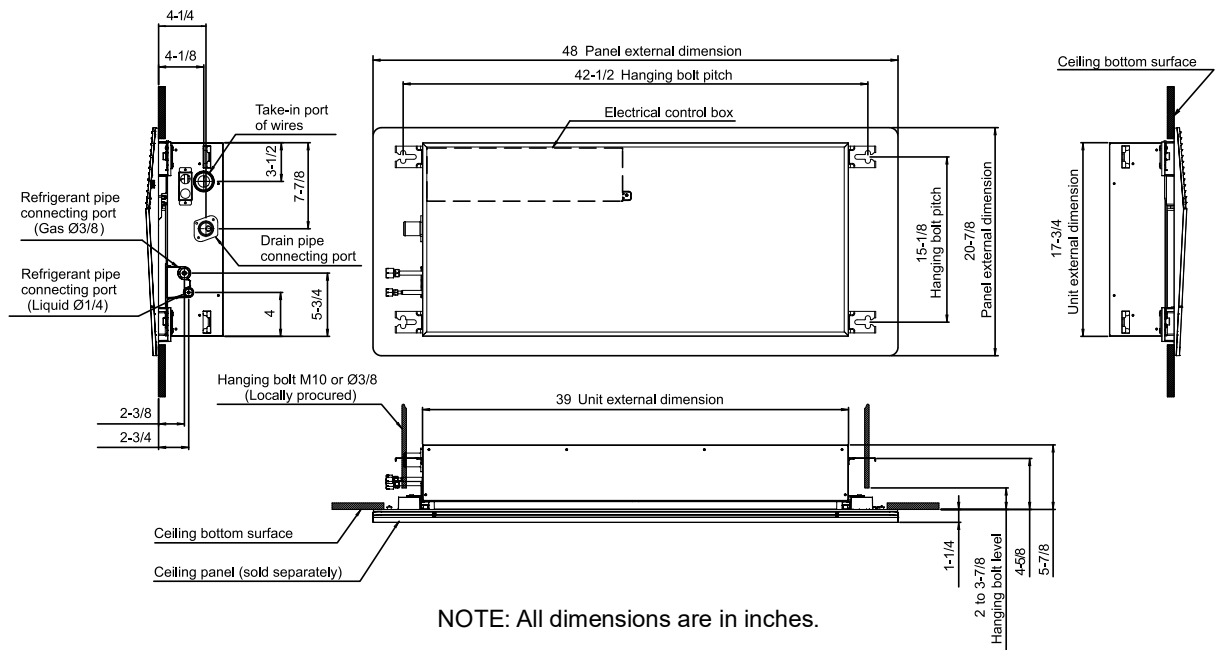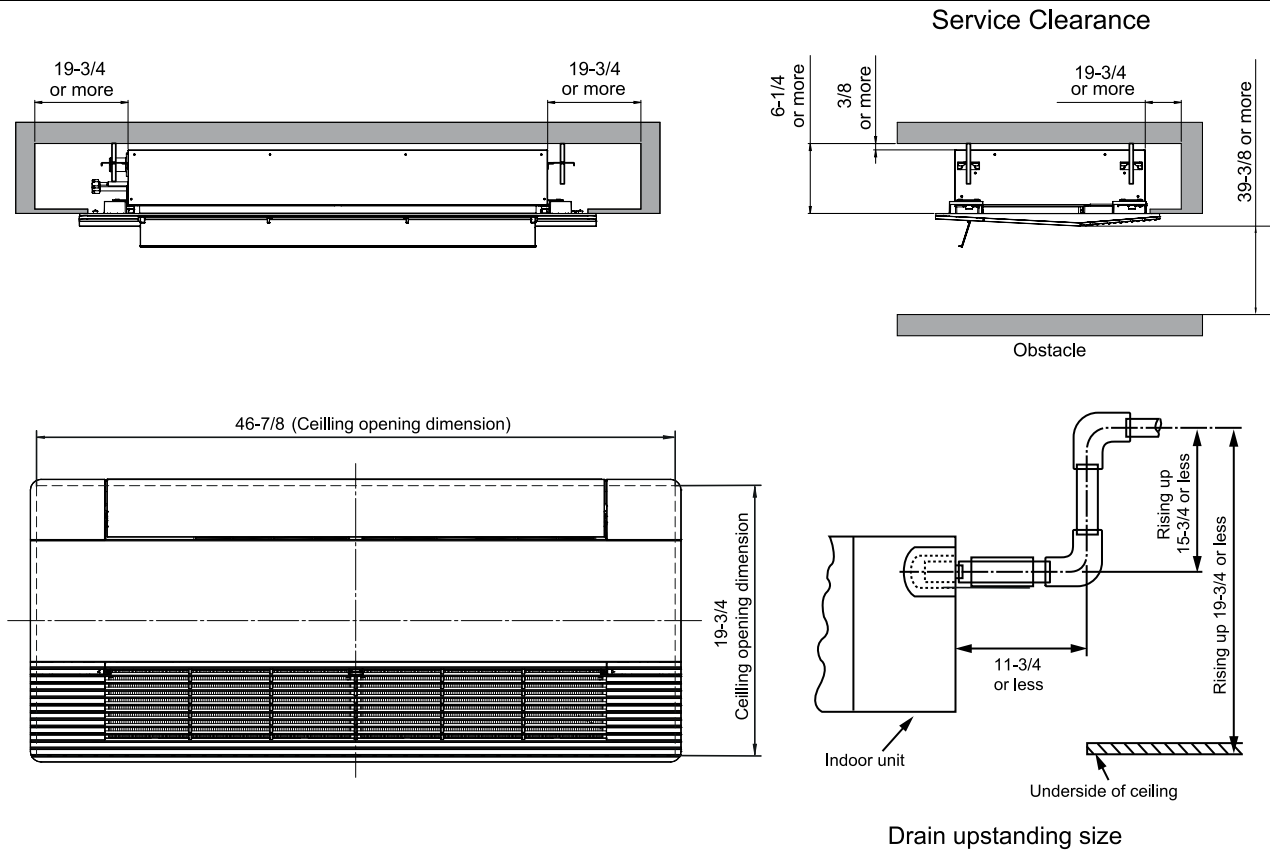

NOTE: All dimensions are in inches.

A210312

