

# VRF Indoor Unit 40VMW005---3 — High Wall



## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_



### STANDARD FEATURES

- Dual Guided Air Design Provides Smoother and More Comfortable Air Flow
- Three Fan Speeds - High, Medium and Low
- Front Panel Lifts Up 65 Degrees Providing Ease of Maintenance
- Heating Mode, Swing Angle for Louver is 68 to 110 Degrees in Auto Mode
- Non-Heating Mode, Swing Angle for Louver is 61 to 93 Degrees in Auto Mode
- Manual Setting for Louver, Swing Angle Between 61 and 110 Degrees
- Multi-Refrigerant Outlet Piping Methods - Left, Right or Rear
- Built in EXV (Electronic Expansion Valve) for Installation Ease


Indoor Unit Model		40VMW005---3
<b>PERFORMANCE</b>		
Total Cooling Rated Capacity	Btu/h	5,070
Sensible Cooling Capacity	Btu/h	4,060
Total Heating Rated Capacity	Btu/h	6,000
Airflow (H / M / L)	CFM	245 / 245 / 245
Sound Pressure (H / M / L)	dBA	31.7 / 31.7 / 31.7
<b>ELECTRICAL</b>		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	11
Minimum Circuit Amps	A	0.29
Maximum Overcurrent Protection	A	15
Motor Type		DC

<b>PHYSICAL DATA</b>		
Pipe Connection Size - Liquid	in.	1/4 (OD)
Pipe Connection Size - Suction	in.	1/2 (OD)
Pipe Connection Size - Drain	in.	3/4 NPT (OD)
Refrigerant		R-410A
Unit Width	in.	36
Unit Height	in.	11-3/8
Unit Depth	in.	9
Unit Net Weight	lb	28

### ACCESSORIES (Optional)

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900012
- ☐ Wired Remote Controller - Prog. 40VM900013
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

## DIMENSIONAL DRAWING INDOOR UNIT HIGH WALL 40VMW005---3

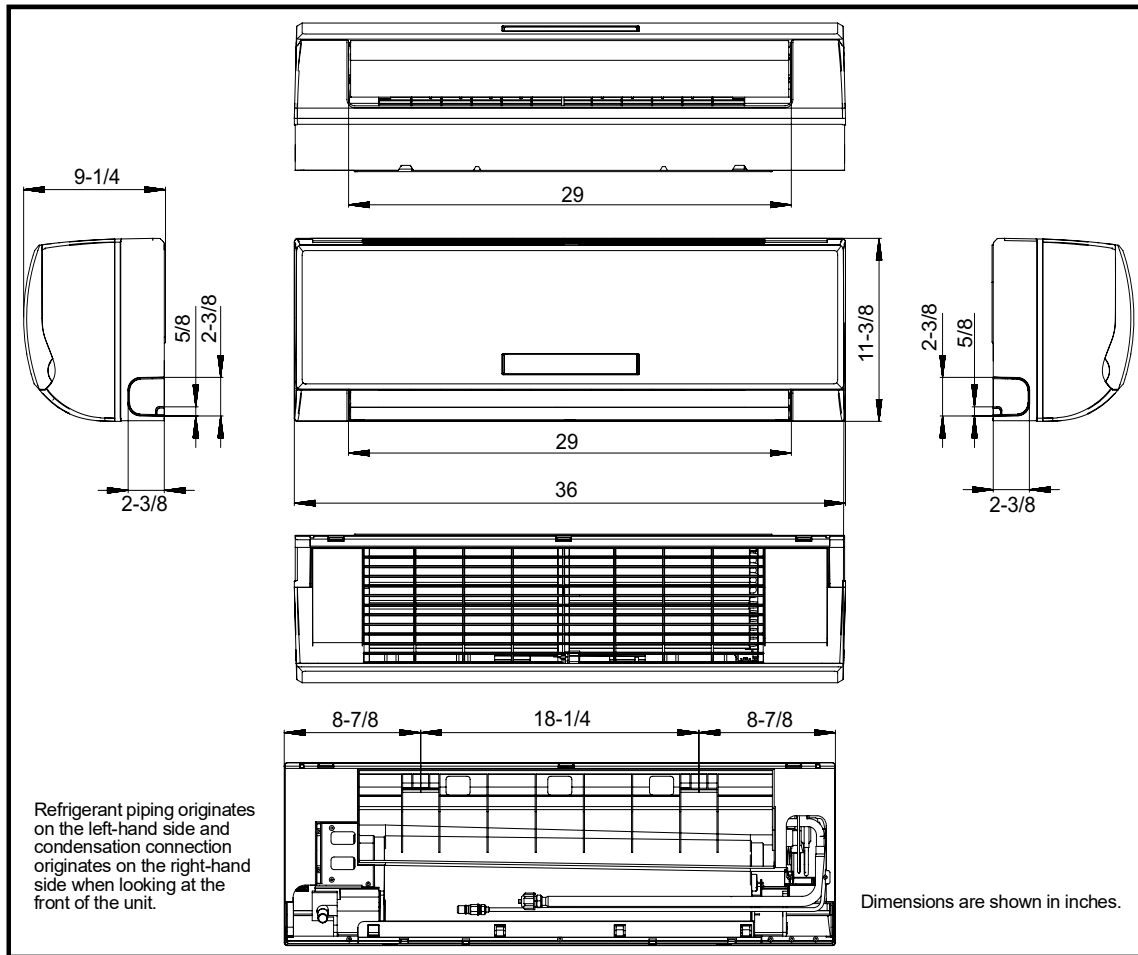

## MOUNTING PLATE INDOOR UNIT HIGH WALL 40VMW005---3

