

# SMMSu VRF u-Series Outdoor Unit MMY-UP2641HT6P-UL—Heat Pump

**TOSHIBA**  
*Carrier*

## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_

Tag \_\_\_\_\_



A230331

### SMMSu VRF Heat Pump Features

- Energy-efficient priority design
- Super-efficient heat exchanger
- Refrigerant cooling inverter system
- Intelligent VRF control
- Less refrigerant
- Space efficient design
- Configuration flexibility
- Wider Operating temperature range
- Comprehensive System construction solution
- Comprehensive Service solution

Header Unit Model		MMY-UP2641HT6P-UL
Outdoor Unit Model Name		MUP1681HT6P-UL + MUP0961HT6P-UL
<b>PERFORMANCE</b>		
Nominal Cooling Capacity†	Btu/h	264,000
Nominal Heating Capacity†	Btu/h	297,000
Maximum number of indoor units		47
Total Connected Indoor Unit Capacity		396
<b>COOLING EFFICIENCY†</b>		
EER (Non-Ducted)	Btu/Wh	10.8
Power Consumption (Non-Ducted)	kW	23.21
EER (Ducted)	Btu/Wh	11.7
Power Consumption (Ducted)		21.53
<b>HEATING EFFICIENCY†</b>		
COP (Non-Ducted)	Btu/Wh	3.8
Power Consumption (Non-Ducted)	kW	21.70
COP (Ducted)	Btu/Wh	4.2
Power Consumption (Ducted)	kW	19.72
<b>FAN</b>		
Fan Type		Propeller
Airflow	CFM	8670 + 6180
Motor Output	kW	0.73 x 2 + 0.59 x 1
<b>ELECTRICAL</b>		
Power Supply	V/Ph/Hz	460/3/60
MCA	A	27.4 + 17.5
MOCP	A	40.0 + 20.0

### COMPRESSORS

Type (Number)	Hermetic Twin Rotary (1)	
Motor Output	kW	12.10 + 6.20

### PHYSICAL DATA

Pipe Connection Size - Liquid (High Pressure)	in.	5/8 (Brazing)	1/2 (Brazing)
Pipe Connection Size - Gas (Low Pressure)	in.	1-1/8 (Brazing)	7/8 (Brazing)
Refrigerant		R-410A	
Factory Charge††	lb	19.8 + 13.2	
External Finish		Munsell 1Y8.5/0.5	
Unit Width	in.	51.4 + 39.6	
Unit Height	in.	66.5 + 66.5	
Unit Depth	in.	31.1 + 31.1	
Unit Net Weight	lb	774 + 533	

### LEGEND

<b>EER</b>	—	Energy Efficiency Ratio
<b>COP</b>	—	Coefficient of Performance
<b>MCA</b>	—	Minimum Circuit Amps
<b>MOCP</b>	—	Maximum Overcurrent Protection


†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 210/240 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db

Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

††Additional charge required.

## OUTDOOR UNIT HEAT PUMP MMY-UP2641HT6P-UL DIMENSIONAL DRAWING

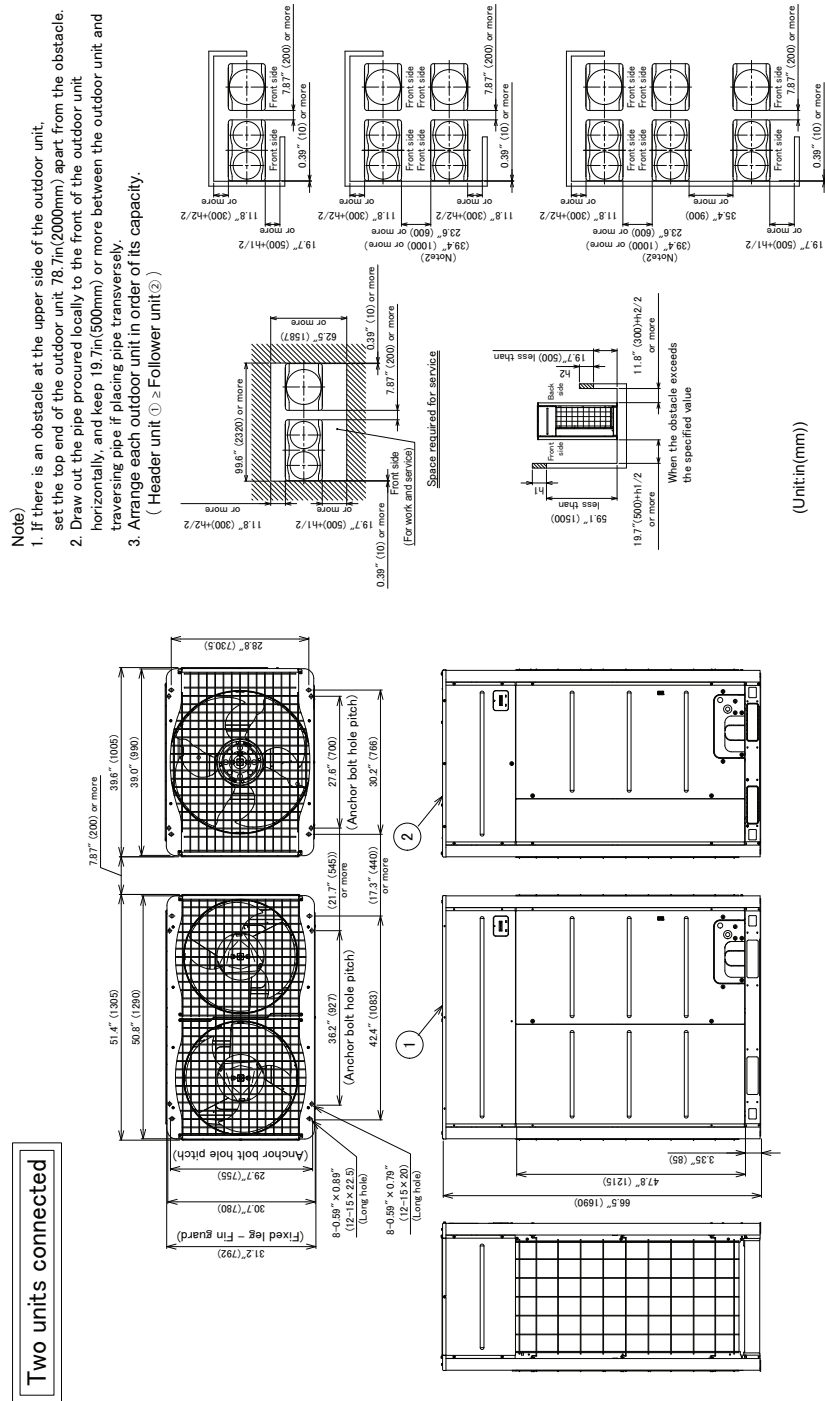

A23034

