




**559K 08-16 LEGACY™ LINE
WITH AXION™ FAN TECHNOLOGY
ELECTRIC COOLING ROOFTOP UNITS WITH
OPTIONAL ELECTRIC HEAT
AND PURON® REFRIGERANT (R-410A)**

LEGACY™
LINE

with **Axion™ Fan** Technology

- **PERFORMANCE DATA**
- **CERTIFIED DIMENSION PRINTS**
- **CERTIFIED ROOF CURB DETAILS**



JOB NAME:	LOCATION:	
BUYER:	BUYER PO #:	BRYANT#:
UNIT NUMBER:	MODEL NUMBER:	
PERFORMANCE DATA CERTIFIED BY:		

DESCRIPTION

559K 08-16 size units are single-packaged electric cooling, units with optional field installed electric heat, or cooling only units that are pre-wired and pre-charged with Puron® (R-410A) HFC refrigerant. The units are fully factory tested. These units meet the upcoming DOE-2023 (Department of Energy) and ASHRAE (American Society of Heating, Refrigerating, and Air-Conditioning Engineers) 90.1 IEER minimum efficiency requirements. Models use Bryant's leading Axion™ Fan Technology indoor fan system with built in speed control and no fan belts or pullies. All models have two-stage cooling and single circuit full active evaporator coil design to provide maximum efficiency and comfort control.

FEATURES

Standard Base Unit

- Puron (R-410A) HFC refrigerant
- Two-stage/single-circuit cooling capacity control on all models
- IEER up to 15.2
- Exceeds current DOE IEER efficiencies while meeting DOE's new stringent 2023 IEER efficiency requirements
- 2023 DOE, ASHRAE 90.1, and IECC - IEER energy compliant
- NEW Direct Drive - Axion™ Fan Technology indoor fan system uses Vane Axial fan design and electronically commutated motor. Indoor fan motor also delivers two speed fan control.
- Non-corrosive composite condensate pan in accordance with ASHRAE 62 Standard, sloping design; side or center drain
- Pre-painted exterior panels and primer-coated interior panels tested to 500 hours salt spray protection
- Insulated cabinet
- Standard cooling operating range up to 125°F (52°C), except 14 size models with 115°F (46°C) and down to 40°F (-4°C). Low Ambient kits allows cooling operation down to 0°F (-18°C).
- Rated in accordance with AHRI Standards 340/360
- Designed in accordance with UL Standard 1995
- Listed by UL and UL-Canada or ETL and ETL-Canada
- Two-inch disposable return air filters
- Tool-less filter access door
- 24-volt control circuit protected with resettable circuit breaker and 75va transformer
- Direct Drive - Axion™ Fan Technology indoor fan system uses vane axial fan design and electronically commutated motor:
 - Shall have inherent automatic-reset thermal overload protection
 - Shall require no fan/motor belts for operation, adjustments, and/or initial fan speed setup
 - Shall be internally protected from electrical phase reversal and phase loss
 - Shall have slow ramp up to speed control capabilities to help reduce sound and comfort issues
 - Shall be a slide-out design with simple screw removal
 - Shall not require VFD fan speed control

- Central terminal board facilitating simple safety circuit troubleshooting and simplified control box arrangement
- Low pressure and high-pressure switch protection
- Mixed air temperature protection. Mixed air temperature switch protects the compressors when a combination of outdoor air and return falls below unsafe compressor limits
- Permanently lubricated evaporator-fan motor
- Totally enclosed condenser motors with permanently lubricated bearings
- Large access panels with easy grip handles
- Innovative, easy starting, no-strip screw feature on unit access panels
- New Vane Axial evaporator-fan system has no fan belts, pullies, blower shaft and blower bearings with slide out design
- Field convertible from vertical to horizontal airflow configuration on all models. Size 16 units require field installed supply duct kit.
- Provisions for thru-the-bottom power entry capability as standard
- Single point electric connections
- Full perimeter base rail with built-in rigging adapters and fork truck slots
- Highly protected tandem scroll compressors with internal line-break overload protection

Refrigerant System (All)

- TXV refrigerant metering system on all models
- Liquid line filter drier on each circuit
- Tandem scroll compressors with internal line-break overload protection
- Copper tube, aluminum fin evaporator coils
- Round Tube/Plate Fin (RTPF) coils on all models

Standard Limited Parts Warranty

- 5-year compressor parts
- 5-year electric heater
- 1-year parts

PERFORMANCE DATA

Unit Operating Weight _____ lb

Curb Weight _____ lb

COOLING

Gross Total Capacity _____ Btuh

at Condenser Air Temperature _____ °F

Gross Sensible Capacity _____ Btuh

Compressor Power Input _____ kW

Indoor Entering: db _____ °F / wb _____ °F

Airflow _____ CFM External Static Pressure _____ in. wg

Indoor Fan Motor Size _____ HP

Exhaust Fan Motor Size _____ HP

HEATING (ELECTRIC)

Heating Capacity:

Stage 1 _____ Btuh

Stage 2 _____ Btuh

Heating Capacity Total _____ Btuh

Stage 1 _____ kW

Stage 2 _____ kW

Heating Capacity Total _____ kW

ELECTRICAL DATA

Power Supply to Unit _____

Volts _____

Phase _____ Hz

Maximum Circuit Amps _____

Maximum Overcurrent Protection _____

SUBMITTAL DATA

Job Name _____

Architect _____

Engineer _____

Contractor _____

Unit Designation _____



FACTORY-INSTALLED OPTIONS

☐ Economizer with DRY BULB Sensing and Barometric Relief

Low Leak Air Dampers —

- Models with W7220 controller meet California Title 24-2016 (Section 120.2) for Fault Detection and Diagnostic (FDD) requirements (EconoMiSer X system).

☐ Economizer with ENTHALPY Sensing and Barometric Relief

Low Leak Air Dampers —

- Models with W7220 controller meet California Title 24-2016 (Section 120.2) Fault Detection and Diagnostic (FDD) requirements (EconoMiSer X system).

☐ Economizer with DRY BULB Sensing and Barometric Relief

ULTRA LOW LEAK Air Dampers —

- Models with W7220 controller meet California Energy Commission Title 24-2016 perspective section 140.4 (damper leakage, etc.) and mandatory section 120.2.i for Fault Detection and Diagnostic controls. Economizers meet ASHRAE 90.1-2016 damper leakage requirements as stated in section 6.5.1.1.4 and Table 6.4.3.4.3, and meet 2016 Fault Detection and Diagnosis requirements in section 6.4.3.12. For outside air, return, and relief air damper leakage requirements economizers meet IECC 2012 section C402.4.5.2 and, IECC 2015 sections C403.2.4.3 and C403.3.3.5 and IECC 2015 section C403.2.4.7 for Fault Detection and

Diagnostic requirements.

NOTE: IECC 2015 section C403.2.4.7.1 requires differential return air sensor, which must be ordered separately.

Outside air, return air, and relief air (volume) dampers are AMCA rated — plus 5 year limited parts warranty (EconoMiSer X system).

☐ Economizer with ENTHALPY Sensing and Barometric Relief

ULTRA LOW LEAK Air Dampers —

- Models with W7220 controller meet California Energy Commission Title 24-2016 perspective section 140.4 (damper leakage, etc.) and mandatory section 120.2.i for Fault Detection and Diagnostic controls. Economizers meet ASHRAE 90.1-2016 damper leakage requirements as stated in section 6.5.1.1.4 and Table 6.4.3.4.3, and meet 2016 Fault Detection and Diagnosis requirements in section 6.4.3.12. For outside air, return, and relief air damper leakage requirements economizers meet IECC 2012 section C402.4.5.2 and, IECC 2015 sections C403.2.4.3 and C403.3.3.5 and IECC 2015 section C403.2.4.7 for Fault Detection and Diagnostic requirements.

NOTE: IECC 2015 section C403.2.4.7.1 requires differential return air sensor, which must be ordered separately.

Outside air, return air, and relief air (volume) dampers are AMCA rated — plus 5 year limited parts warranty (EconoMiSer X system).

FACTORY-INSTALLED OPTIONS (CONT)

- ☐ Through the base connectors for gas and electric conduit/piping
- ☐ Perfect Humidity™ adaptive dehumidification system
- ☐ Non-fused disconnect
- ☐ Powered 115-volt convenience outlet
- ☐ Non-powered 115-volt convenience outlet
- ☐ High static evaporator fan motor
- ☐ Return Air smoke detector
- ☐ Supply Air smoke detector
- ☐ CO₂ sensor
- ☐ Condenser hail guard-louvered style
- ☐ Special coating protection for evaporator and condenser coils

- ☐ Hinged access doors
- ☐ Condensate overflow switch
- ☐ Phase Monitor/Protection

Optional Warranties

- ☐ Complete unit parts only, up to 5 years
- ☐ Complete unit parts and labor, up to 5 years

Many other optional warranties are available. See the Commercial Start-Up and Optional Extended Warranty Price pages for further information.

FIELD-INSTALLED ACCESSORIES

☐ Economizer with DRY BULB Sensing and Barometric Relief

Standard Leak Air Dampers —

- Models with W7212 controller provide standard non-diagnostic control. EconoMiSer® IV.
- Models with W7220 controller meet California Title 24-2016 Section 120.2.i for Fault Detection and Diagnostic (FDD) requirements. EconoMiSer X.

☐ Economizer with ENTHALPY Sensing and Barometric Relief

Standard Leak Air Dampers —

- Models with W7212 controller provide standard non-diagnostic control. EconoMiSer IV.
- Models with W7220 controller meet California Title 24-2016 Section 120.2.i Fault Detection and Diagnostic (FDD) requirements. EconoMiSer X.

☐ Economizer with DRY BULB Sensing and Barometric Relief

ULTRA LOW LEAK Air Dampers —

- Models with W7220 controller meet California Energy Commission Title 24-2016 perspective section 140.4 (damper leakage, etc.) and mandatory section 120.2.i for Fault Detection and Diagnostic controls. Economizers meet ASHRAE 90.1-2016 damper leakage requirements as stated in section 6.5.1.1.4 and Table 6.4.3.4.3, and meet 2016 Fault Detection and Diagnosis requirements in section 6.4.3.12. For outside air, return, and relief air damper leakage requirements economizers meet IECC 2012

section C402.4.5.2 and, IECC 2015 sections C403.2.4.3 and C403.3.3.5 and IECC 2015 section C403.2.4.7 for Fault Detection and Diagnostic requirements.

NOTE: IECC 2015 section C403.2.4.7.1 requires differential return air sensor, which must be ordered separately.

Outside air, return air, and relief air (volume) dampers are AMCA rated.

☐ Economizer with ENTHALPY Sensing and Barometric Relief

ULTRA LOW LEAK Air Dampers —

- Models with W7220 controller meet California Energy Commission Title 24-2016 perspective section 140.4 (damper leakage, etc.) and mandatory section 120.2.i for Fault Detection and Diagnostic controls. Economizers meet ASHRAE 90.1-2016 damper leakage requirements as stated in section 6.5.1.1.4 and Table 6.4.3.4.3, and meet 2016 Fault Detection and Diagnosis requirements in section 6.4.3.12. For outside air, return, and relief air damper leakage requirements economizers meet IECC 2012 section C402.4.5.2 and, IECC 2015 sections C403.2.4.3 and C403.3.3.5 and IECC 2015 section C403.2.4.7 for Fault Detection and Diagnostic requirements.

NOTE: IECC 2015 section C403.2.4.7.1 requires differential return air sensor, which must be ordered separately.

Outside air, return air, and relief air (volume) dampers are AMCA rated.

FIELD-INSTALLED ACCESSORIES (CONT)

- ☐ Prop fan power exhaust
- ☐ Two-position motorized outdoor air damper
- ☐ Manual outside air damper 25%
- ☐ Manual outside air damper 50%
- ☐ Roof Curb — 14 inch (356 mm) tall
- ☐ Roof Curb — 24 inch (610 mm) tall
- ☐ Thru-the-bottom connections (electrical only)
- ☐ Electric heat and single point kits
- ☐ Condenser hail guard (louvered style)
- ☐ Phase monitor (loss of phase/phase reversal)
- ☐ Winter start kit, down to 0°F (–18°C)
- ☐ Low ambient head pressure controller, down to 0°F (–18°C)
- ☐ UVC high output lights
- ☐ MERV-8 filter kits
- ☐ MERV-13 filter kits
- ☐ 4 in. filter racks
- ☐ Time Guard II compressor anti-cycle protection
- ☐ Thermostats and Sensors

- ☐ Condensate overflow switch
- ☐ Non-powered 115-volt (20 amp) convenience outlet
- ☐ Side access hinged filter door kit
- ☐ Horn/strobe annunciator

Size 16 Only

- ☐ Disconnect switch bracket
- ☐ Supply duct cover

Economizer Sensors

- ☐ Single Dry bulb control
- ☐ Differential Dry bulb control
- ☐ Single enthalpy control
- ☐ Differential enthalpy control
- ☐ CO₂ — wall mounted
- ☐ CO₂ — duct mounted
- ☐ CO₂ — unit mounted

CERTIFIED DIMENSION PRINT

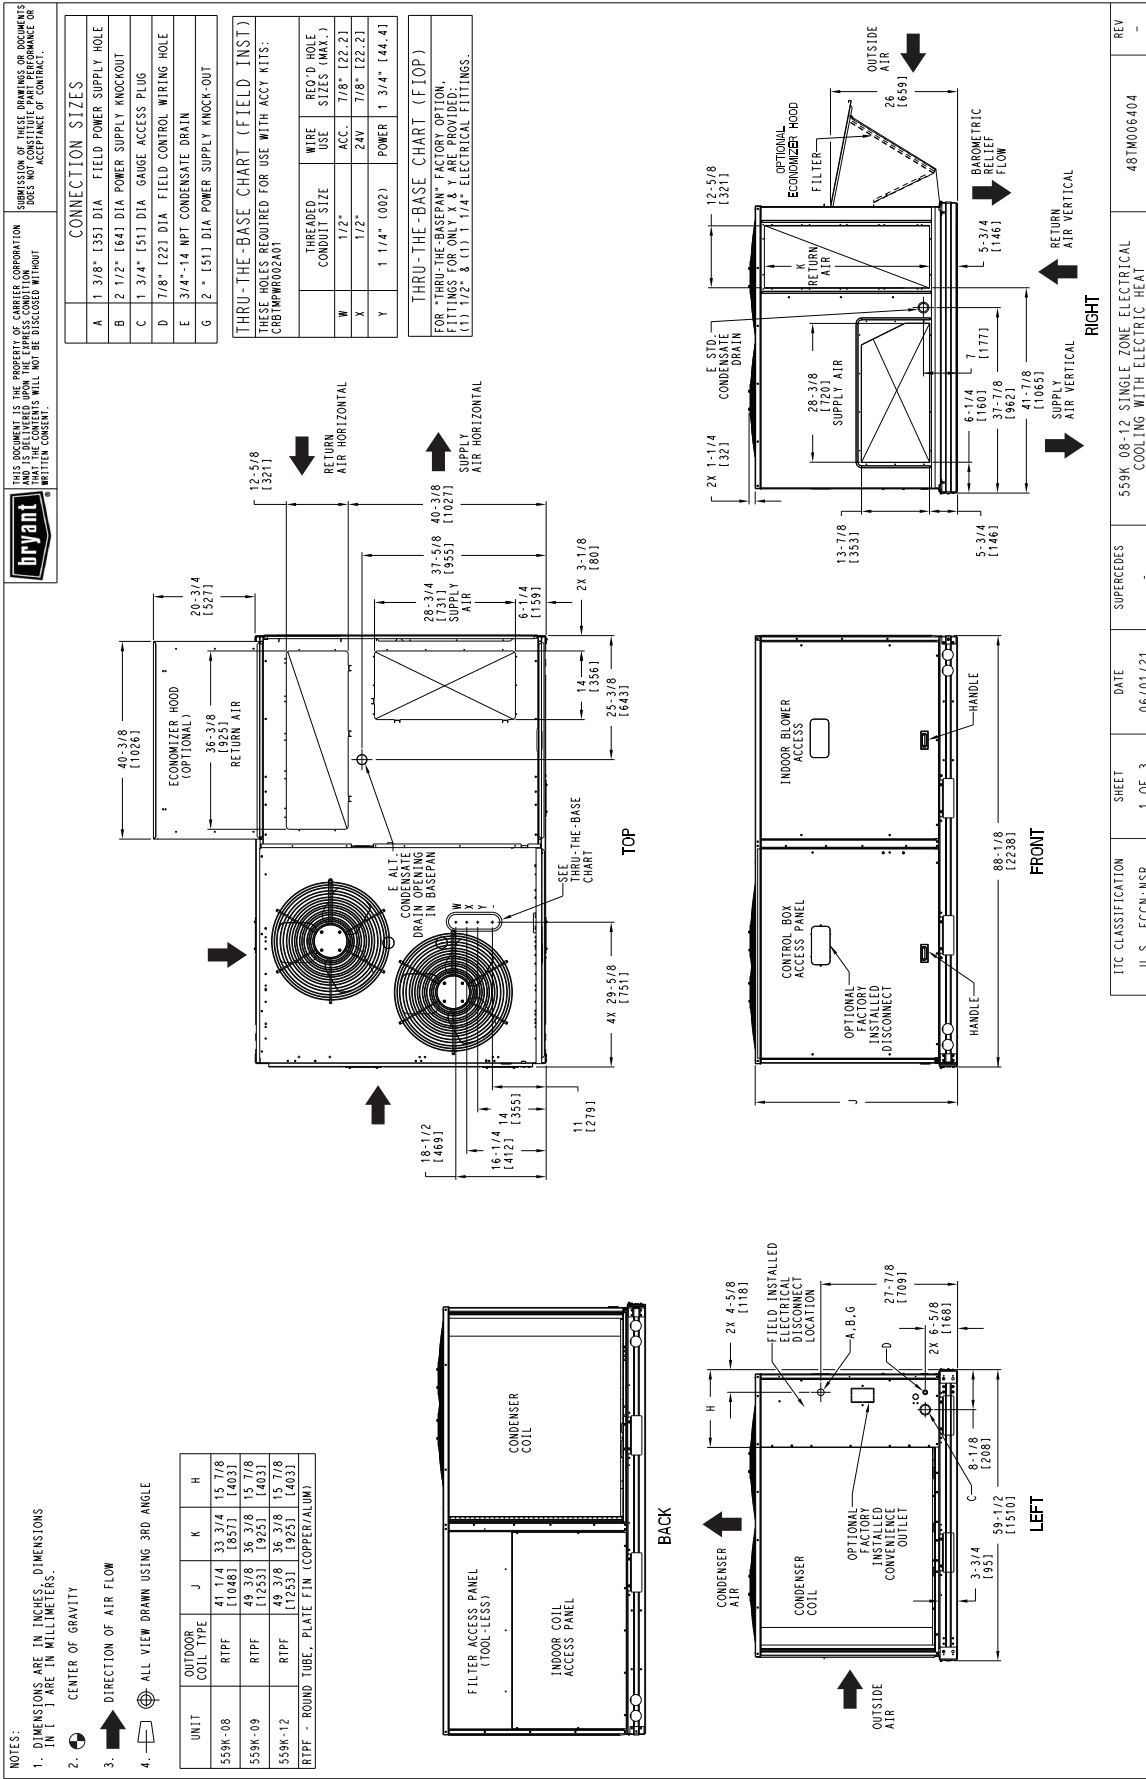


Fig. 1 — 559K**08-12 Dimensional Drawing

CERTIFIED DIMENSION PRINT

UNIT	OUTDOOR COIL TYPE	STD. UNIT WEIGHT ***		CORNER WEIGHT (A)		CORNER WEIGHT (B)		CORNER WEIGHT (C)		CORNER WEIGHT (D)		C. G.							
		LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	X	Y	Z					
559K-08	RTPF	743	337	170	77	142	64	196	89	235	107	40	11016	34	1/2	1838	20	1508	
559K-09	RTPF	805	365	196	89	251	114	201	91	157	71	49	11257	26	1/2	1673	19	118	1486
559K-12	RTPF	815	370	198	90	254	115	204	92	159	72	49	11257	26	1/2	1673	19	118	1486
RTPF - ROUND TUBE, PLATE FIN (COPPER/ALUM)																			





THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT WRITTEN CONSENT.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS DOES NOT CONSTITUTE PART PERFORMANCE OR ACCEPTANCE OF CONTRACT.



THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION AND IS DELIVERED UPON THE EXPRESS CONDITION THAT IT WILL NOT BE DISCLOSED WITHOUT WRITTEN CONSENT.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS DOES NOT CONSTITUTE PART PERFORMANCE OR ACCEPTANCE OF CONTRACT.

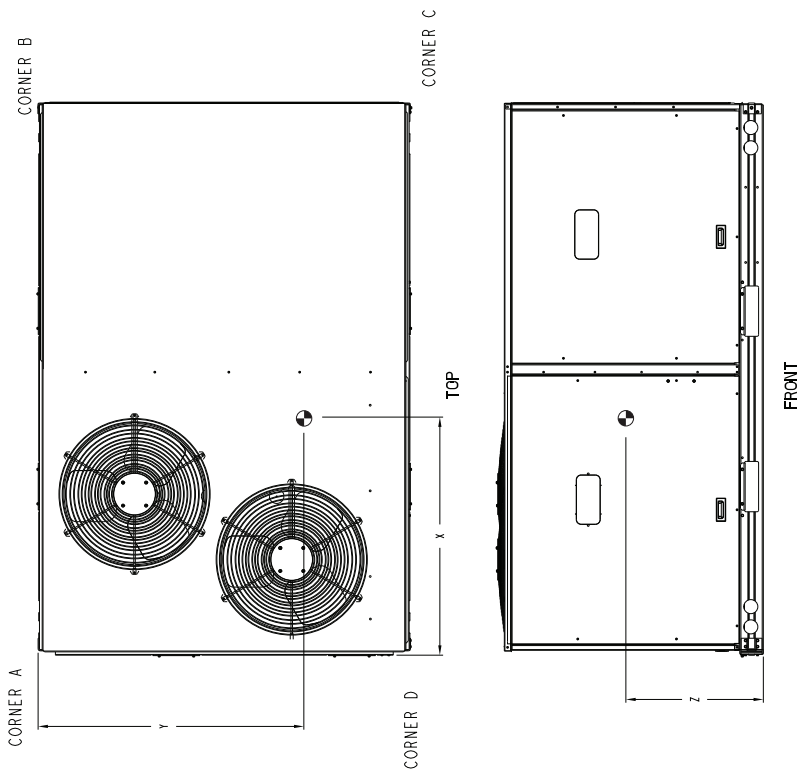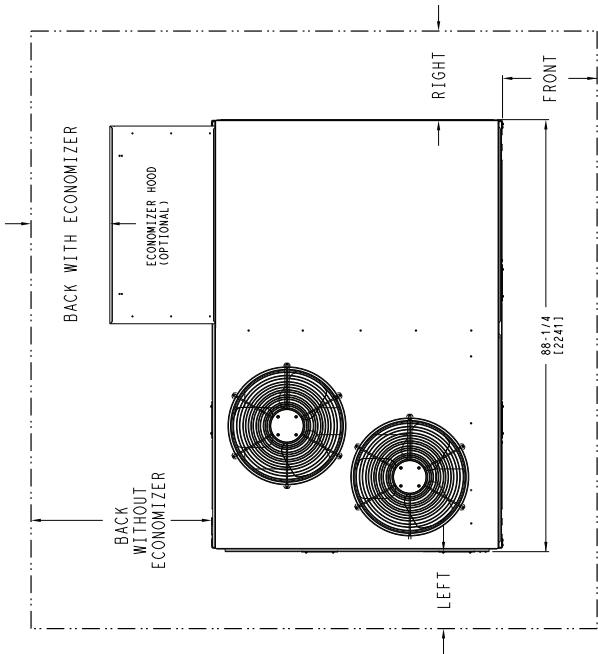

NOTE:
1. FOR ALL MINIMUM CLEARANCES LOCAL CODES OR JURISDICTIONS MAY PREVAIL.

		CLEARANCE		
SURFACE		SERVICE WITH CONDUCTIVE BARRIER	SERVICE WITH NONCONDUCTIVE BARRIER	OPERATING CLEARANCE
FRONT		48 [1219mm]	36 [914mm]	18 [457mm]
LEFT		48 [1219mm]	42 [1067mm]	18 [457mm]
BACK W/O ECON		48 [1219mm]	42 [1067mm]	18 [457mm]
BACK W/ECON		36 [914mm]	36 [914mm]	18 [457mm]
RIGHT		36 [914mm]	36 [914mm]	18 [457mm]
TOP		72 [1829mm]	72 [1829mm]	72 [1829mm]
SUPERCEDES	559K 08-12 SINGLE ZONE ELECTRICAL COOLING WITH ELECTRIC HEAT			
ITC CLASSIFICATION	U.S. ECCN:NSR	SHEET 2 OF 3	DATE 06/01/21	REV -

Fig. 1 — 559K**08-12 Dimensional Drawing (cont)

CERTIFIED DIMENSION PRINT

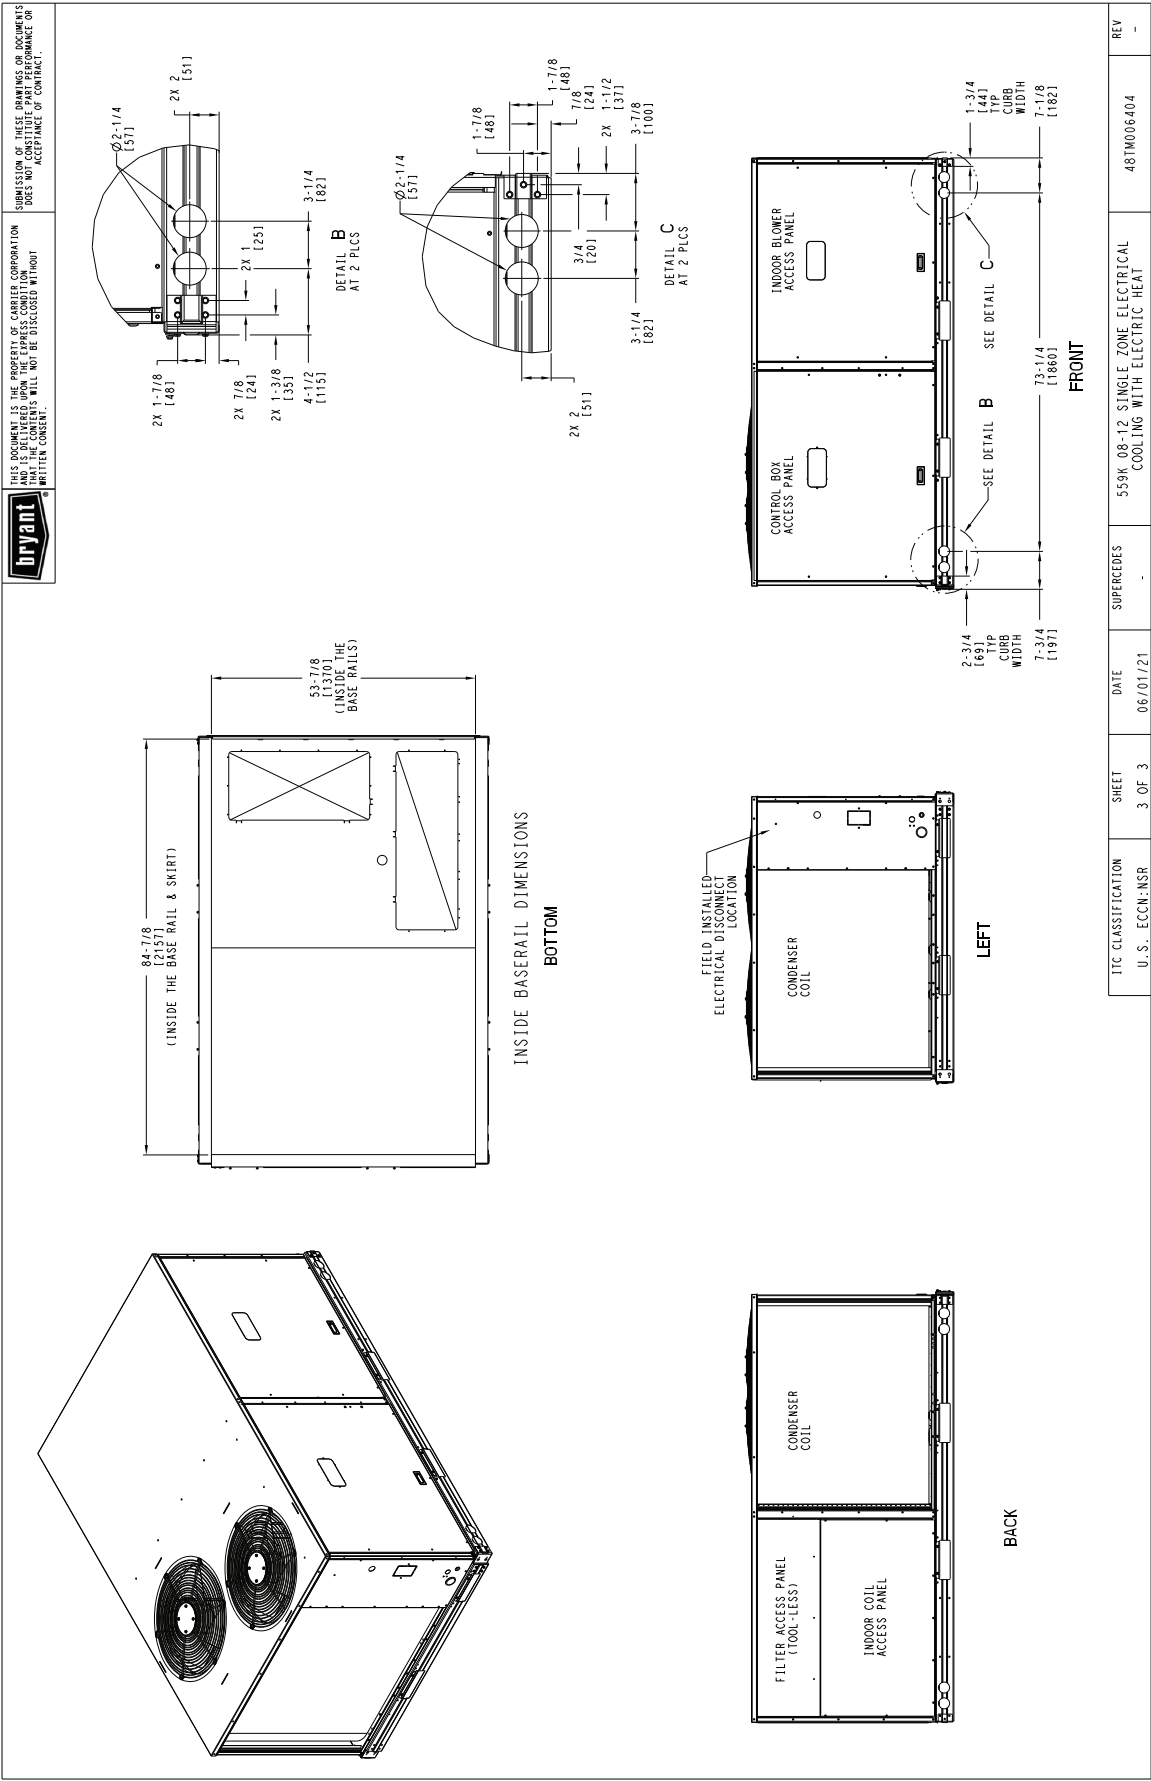


Fig. 1 — 559K**08-12 Dimensional Drawing (cont)

NOTES:

- DIMENSIONS ARE IN INCHES; DIMENSIONS IN [] ARE IN MILLIMETERS.
- SEE CENTER OF GRAVITY
- DIRECTION OF AIR FLOW
- ALL VIEW DRAWN USING 3RD ANGLE

CONNECTION SIZES

	A	B	C	D	E	G
1	3/8"	1/2"	3/4"	1/2"	3/4"	1/2"
2	1/2"	3/4"	1"	3/4"	1/2"	3/4"
3	1/2"	3/4"	1"	3/4"	1/2"	3/4"
4	1/2"	3/4"	1"	3/4"	1/2"	3/4"
5	1/2"	3/4"	1"	3/4"	1/2"	3/4"
6	1/2"	3/4"	1"	3/4"	1/2"	3/4"

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]

THRU-THE-BASE CHART

THREADED CONDUIT SIZE	WIRE ACC.	RED'D HOLE USE SIZES (MAX.)
1/2"	1/2"	7/8" [222.2]
3/4"	3/4"	1 1/8" [304.8]
1"	1"	1 3/4" [44.4]


THRU-THE-BASE CHART

Fig. 2 — 559K14 Dimensional Drawing**

CERTIFIED DIMENSION PRINT


UNIT	OUTDOOR COOLING TYPE	STD. WEIGHT*** LBS.	CORNER WEIGHT (A)		CORNER WEIGHT (B)		CORNER WEIGHT (C)		CORNER WEIGHT (D)		C. G.					
			LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	X	Y	Z	
559K-14	RTPF	978	444	234	106	300	136	249	113	195	88	49	1/2 (1257)	27	1686	20 1/2 (521)
RTPF - ROUND TUBE, PLATE FIN (COPPER/ALUM)																

*** STANDARD UNIT WEIGHT IS WITHOUT ELECTRIC HEAT AND WITHOUT PACKAGING. FOR OTHER OPTIONS AND ACCESSORIES, REFER TO THE PRODUCT DATA CATALOG.

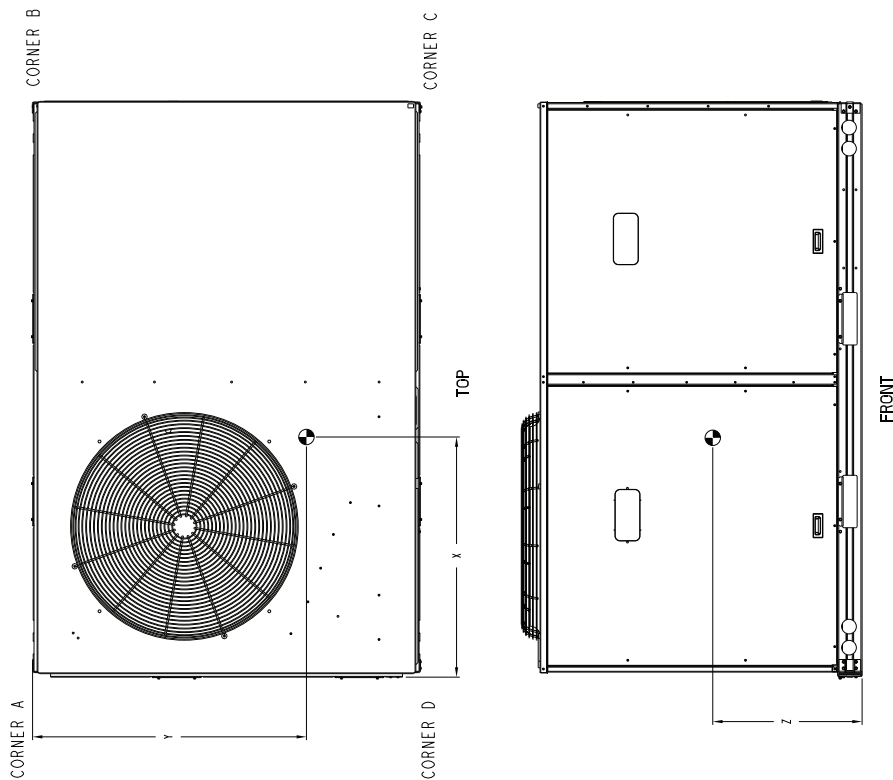

bryant

THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION
AND IS DELIVERED UPON THE EXPRESS CONDITION
THAT THE CONTENTS WILL NOT BE DISCLOSED WITHOUT
WRITTEN CONSENT

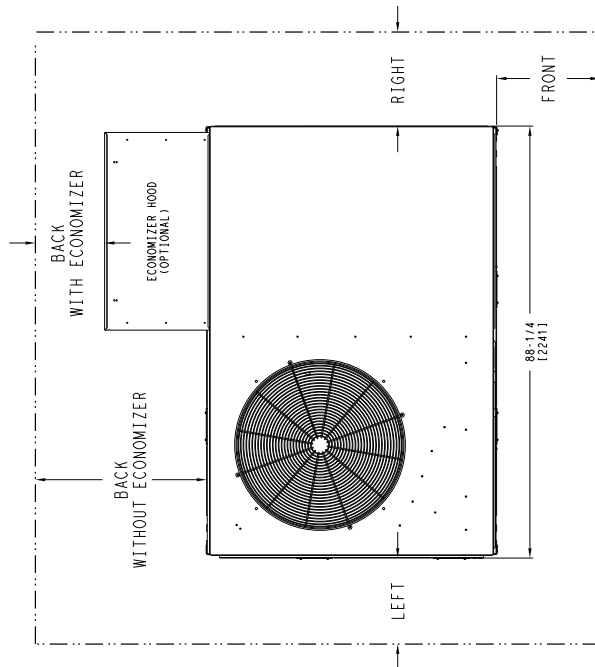

NOTE:

1. FOR ALL MINIMUM CLEARANCES LOCAL CODES OR JURISDICTIONS MAY PREVAIL.

ITC CLASSIFICATION	SHEET	DATE	SUPERCEDES	CLEARANCE			OPERATING CLEARANCE
				SURFACE	SERVICE WITH CONDUCTIVE BARRIER	SERVICE WITH NONCONDUCTIVE BARRIER	
11 S ECON NSD	2 OF 3	06/01/21	559K-14 SINGLE ZONE ELECTRICAL COOLING WITH ELECTRIC HEAT	FRONT	48 [1219mm]	36 [914mm]	18 [457mm]
				LEFT	48 [1219mm]	42 [1067mm]	18 [457mm]
				BACK W/O ECON	48 [1219mm]	42 [1067mm]	18 [457mm]
				BACK W/ECON	36 [914mm]	36 [914mm]	18 [457mm]
				RIGHT	36 [914mm]	36 [914mm]	18 [457mm]
				TOP	72 [1829mm]	72 [1829mm]	72 [1829mm]
				559K-14 SINGLE ZONE ELECTRICAL COOLING WITH ELECTRIC HEAT		481M006406	
						REV	

Fig. 2 — 559K*14 Dimensional Drawing (cont)

bryant

THIS DOCUMENT IS THE PROPERTY OF CLIMATON CORPORATION AND IS LOANED TO YOU FOR YOUR INFORMATION ONLY. IT IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE WRITTEN CONSENT OF CLIMATON CORPORATION.

SUBMISSION OF THESE DRAWINGS OR DOCUMENTS TO ANY AGENCY FOR PERMITS OR APPROVALS DOES NOT CONSTITUTE AN ACCEPTANCE OF CONTRACT.

INSIDE BASERAIL DIMENSIONS

TOP

84-7/8 (INSIDE THE BASE RAIL & SKIRT)

53-7/8 (INSIDE THE BASE RAILS)

FRONT

73-1/4 (1860)

7-1/8 (182)

1-3/4 (41)

SEE DETAIL B

SEE DETAIL C

CONTROL BOX ACCESS PANEL

INDOOR BLOWER ACCESS PANEL

CONDENSER COIL

LEFT

FIELD-INSTALLED ELECTRICAL DISCONNECT LOCATION

BACK

INDOOR COIL ACCESS PANEL

FILTER ACCESS PANEL (DISPOSABLE FILTERS)

DETAIL B

TYP 2 PLCS

2X 1-7/8 (48)

2X 7/8 (24)

2X 1-1/2 (38)

2X 1-3/8 (35)

4-1/2 (115)

3-1/4 (82)

Ø2-1/4 (51)

DETAIL C

TYP 2 PLCS

1-7/8 (48)

7/8 (24)

3/4 (20)

2X 1-1/2 (38)

2X 1-7/8 (48)

3-1/4 (82)

3-7/8 (100)

Ø2-1/4 (51)

2X 2 (51)

13

CERTIFIED DIMENSION PRINT

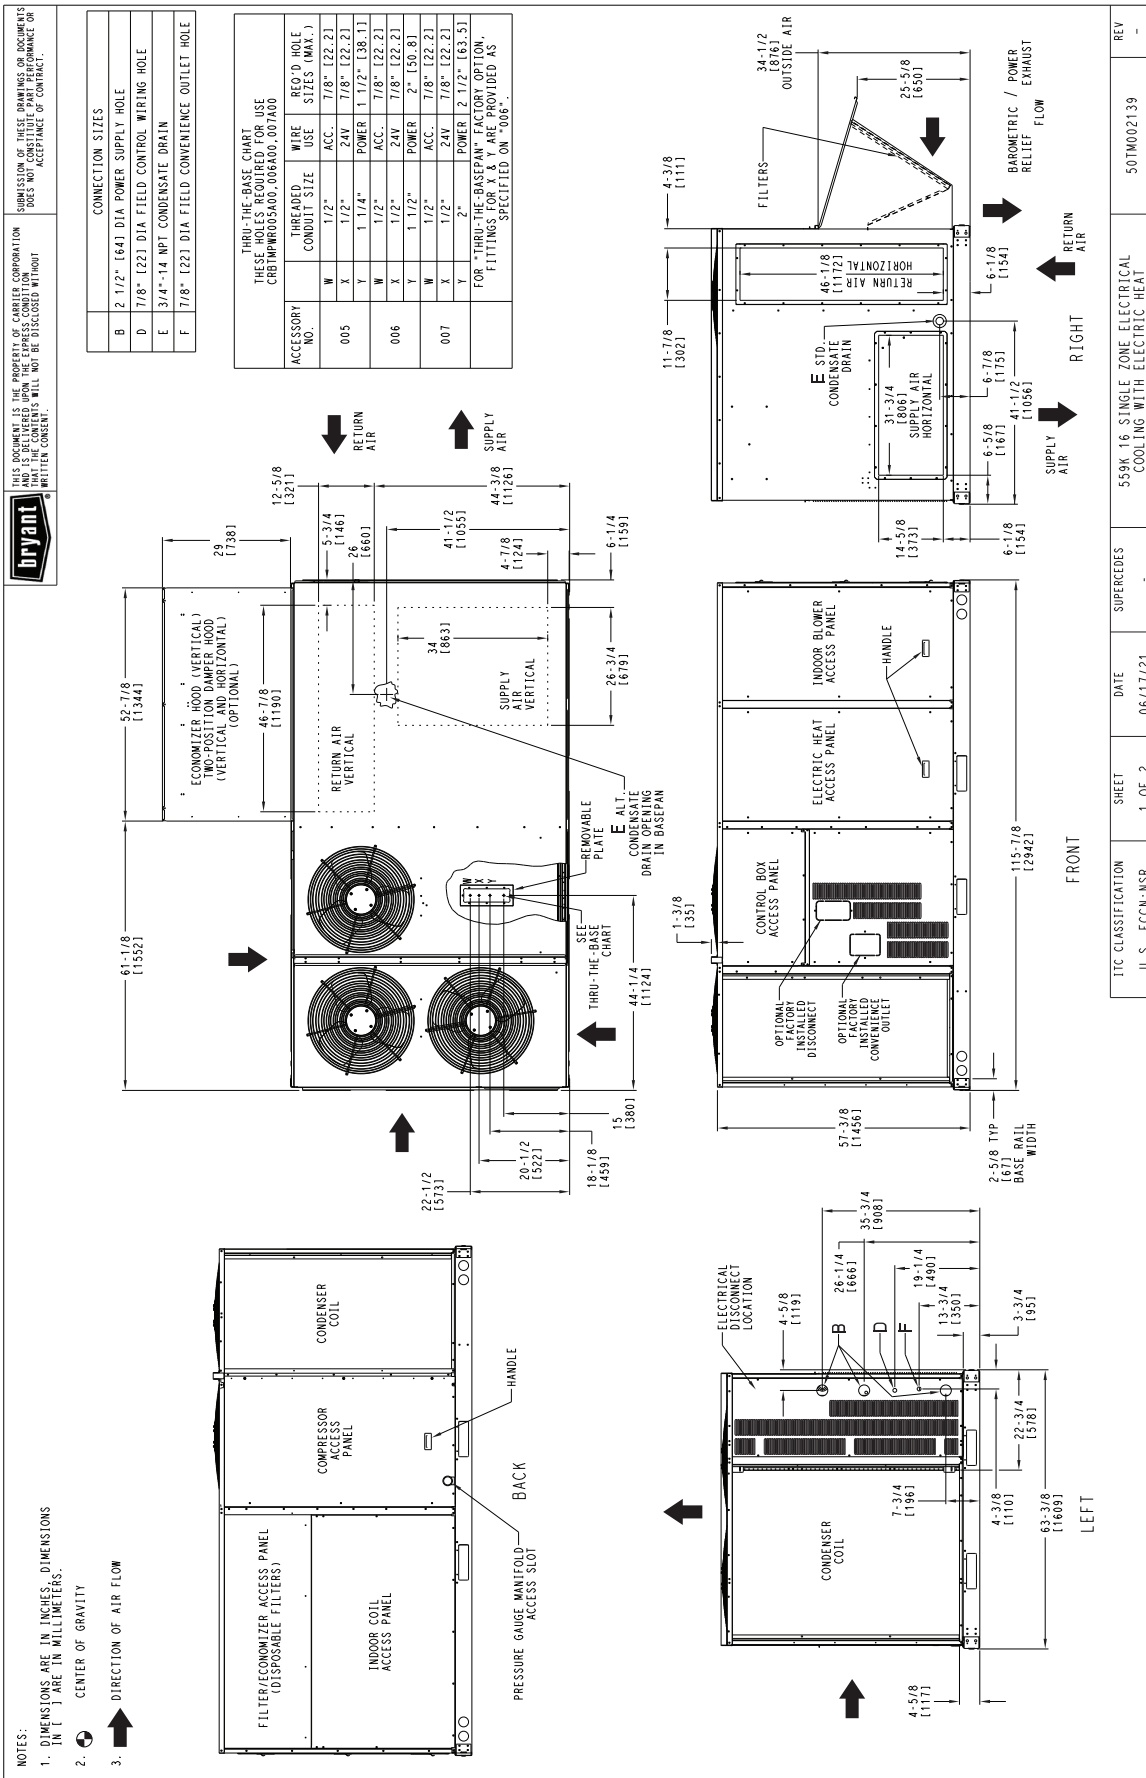


Fig. 3 — 559K**16 Dimensional Drawing

CERTIFIED DIMENSION PRINT

UNIT	STD UNIT		CORNER		CORNER		CORNER		CORNER		CORNER		C.G.	
	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	LBS.	KG.	X	Y
559K-16	1325	601	370	168	312	142	294	133	349	158	53	113451	30	3/4
														22

STANDARD UNIT WEIGHT IS WITHOUT ELECTRIC HEAT & WITHOUT PACKAGING.
FOR OPTIONS & ACCESSORIES, REFER TO THE PRODUCT DATA CATALOG.






THIS DOCUMENT IS THE PROPERTY OF CARRIER CORPORATION
AND IS DELIVERED UPON THE EXPRESS CONDITION
THAT IT WILL NOT BE DISCLOSED WITHOUT
WRITTEN CONSENT.

559K-16 SINGLE ZONE ELECTRICAL
COOLING WITH ELECTRIC HEAT

501M002139


REV -

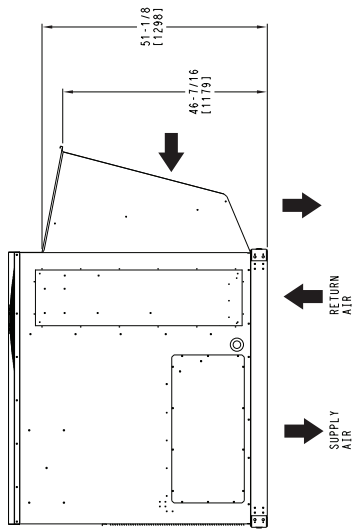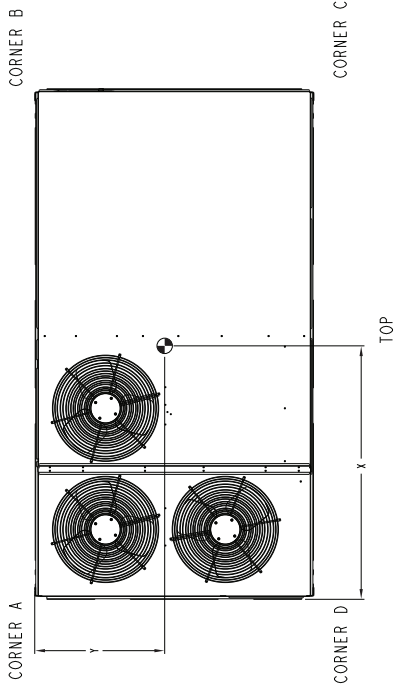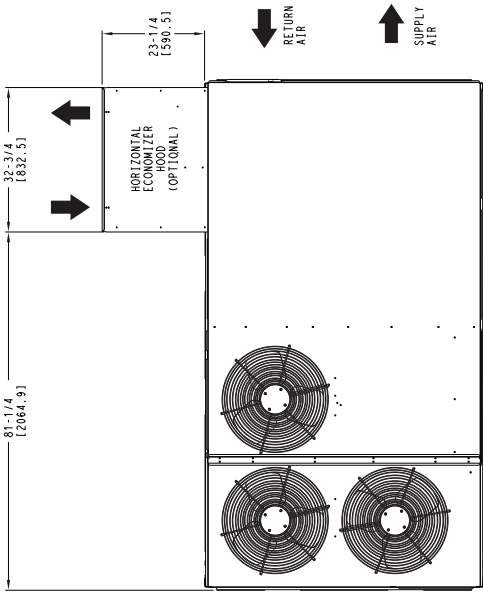

HORIZONTAL ECONOMIZER

Fig. 3 — 559K**16 Dimensional Drawing (cont)

CERTIFIED DIMENSION PRINT

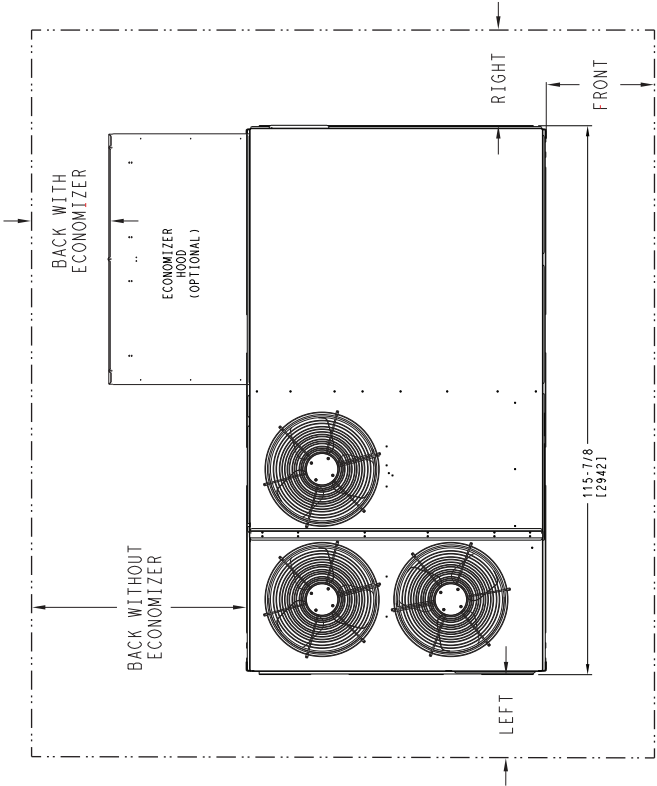

SURFACE	CLEARANCE		
	Service with Conductive Barrier	Service with Non-conductive Barrier	Operating Clearance
FRONT	48 in. (1219 mm)	36 in. (914 mm)	18 in. (457 mm)
LEFT	48 in. (1219 mm)	42 in. (1067 mm)	18 in. (457 mm)
BACK W/O ECONOMIZER	48 in. (1219 mm)	42 in. (1067 mm)	18 in. (457 mm)
BACK W/ ECONOMIZER	36 in. (914 mm)	36 in. (914 mm)	18 in. (457 mm)
RIGHT	36 in. (914 mm)	36 in. (914 mm)	18 in. (457 mm)
LEFT	72 in. (1829 mm)	72 in. (1829 mm)	72 in. (1829 mm)

NOTE: For all minimum clearances local codes or jurisdictions may prevail.

Fig. 4 — 559K*16 Base Unit Dimensions – Clearances

CERTIFIED ROOF CURB DETAILS





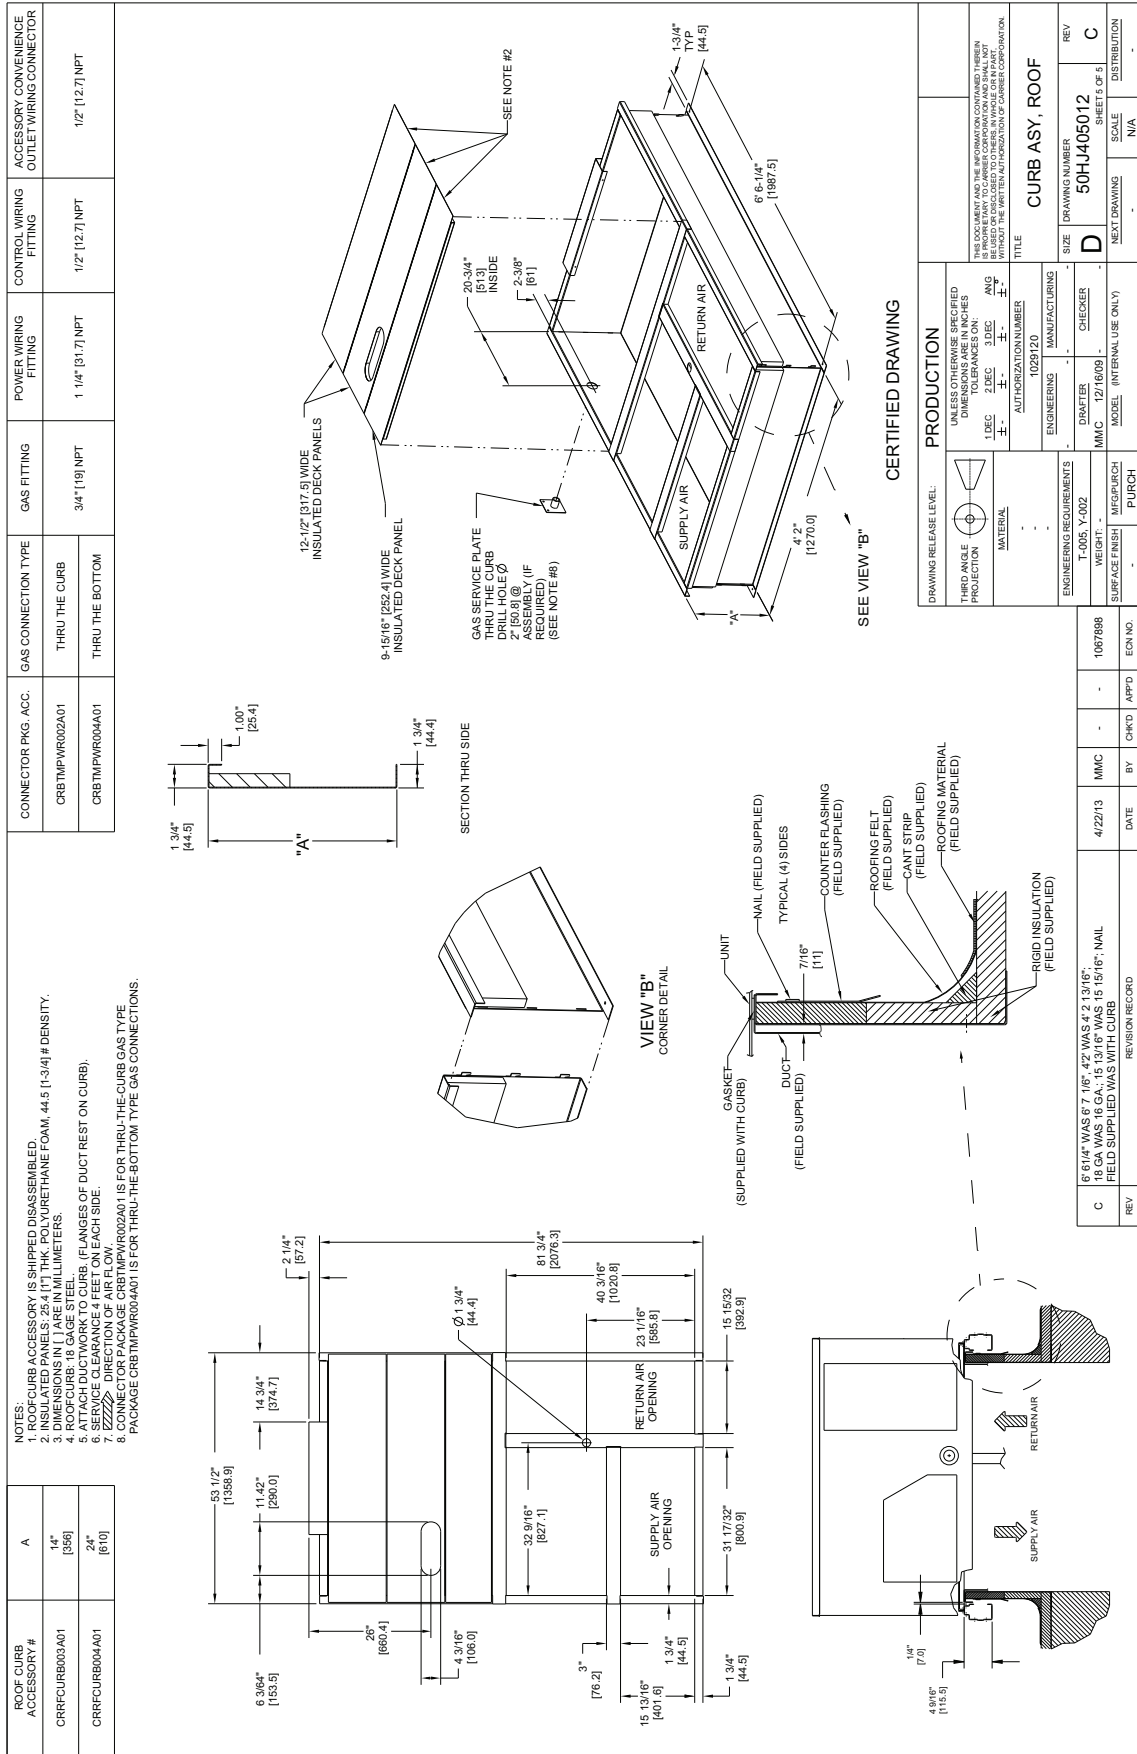


Fig. 5 — 559K*08-14 Roof Curb Details

CERTIFIED ROOF CURB DETAILS

- NOTES:
1. ROOF CURB ACCESSORY IS SHIPPED DISASSEMBLED.
 2. DIMENSIONS IN L.S. (INCHES) ARE IN MILLIMETERS.
 3. DIMENSIONS IN L.S. (INCHES) ARE IN MILLIMETERS.
 4. ROOF CURB SIDEWALLS: 16 GAGE STEEL.
 5. ATTACH DUCTWORK TO CURB ON FLANGES OF DUCT REST ON CURB).
 6. SEAL CURB TO ROOF WITH 1/2" NEOPRENE INSULATION.
 7. DIRECTION OF AIR FLOW.
 8. "L" & "S" DESIGNATIONS DENOTE LOCATION OF COMMON CROSS RAIL. (POSITION "L" FOR LARGE DUCT OPENING CURB).

ROOF CURB ACCESSORY #	A
CRRCURB074A00	14" [356]
CRRCURB075A00	24" [610]

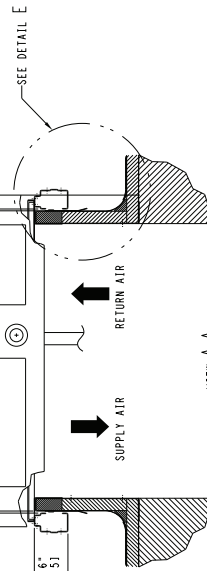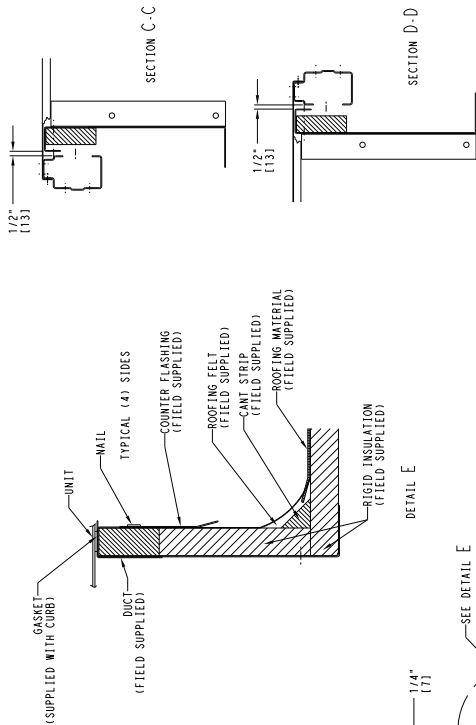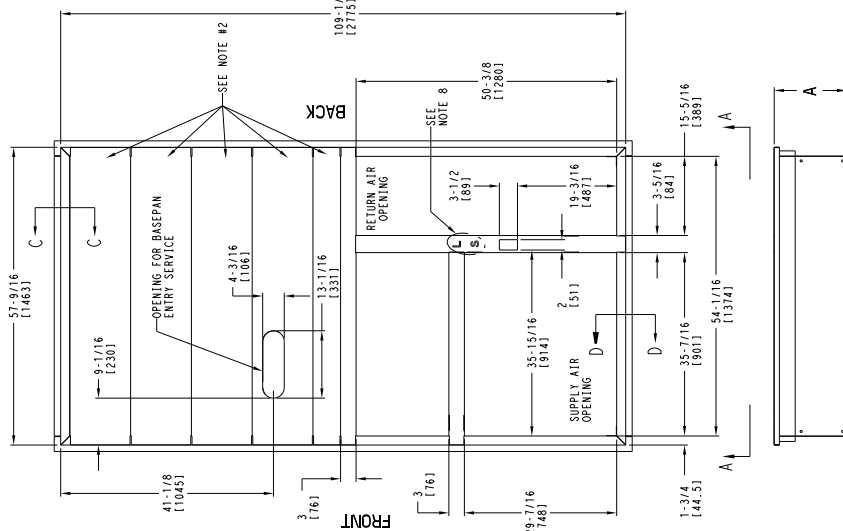

MAX CURB LEVELING TOLERANCES

LARGE DUCT OPENINGS

507M500780
REV B

Fig. 5 — 559K**16 Roof Curb Details