

High Wall Heat Pump Ductless System



Indoor Model: 40MHHAQ12XA3

Submittal Data

Job Data:

Location:

Buyer: Buyer P.O. #:

Carrier #:

Unit Number: Model Number:

Performance Data Certified By: Date:



- STANDARD FEATURES:**
- Available in 208/230V (9-36K)
 - Available in 115V (9K-12K)
 - Modes: Cool, Heat, Dry, Fan, Auto
 - Turbo Mode
 - Fully Modulating fan speeds
 - Up-Down / Right-Left Louver control (fixed or swing)
 - ECO Mode
 - Heating Setback (46° F Heating Mode)
 - Anti-corrosive fin coatings

- CONTROLS:**
- Wireless Remote Controller included with indoor unit

System	Size		12
	Indoor Model		40MHHAQ12XA3
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply	Indoor unit powered by outdoor unit	
	MCA	A.	0.19
Controls	Wireless Remote Controller (°F/°C Convertible)		Standard
	Wired Remote Controller (°F/°C Convertible)		Optional
Operating Range	Cooling Indoor DB Min -Max	°F(°C)	63~90 (17~32)
	Heating Indoor DB Min -Max	°F(°C)	32~86 (0~30)
Piping	Pipe Connection Size - Liquid	in (mm)	1/4 (6.35)
	Pipe Connection Size - Suction	in (mm)	1/2 (12.7)

Indoor Coil	Face Area		Sq. Ft.	2.05
	No. Rows			2
	Fins per inch			20
	Circuits			2
Indoor	Unit Width	in (mm)		31.57 (802)
	Unit Height	in (mm)		11.61 (295)
	Unit Depth	in (mm)		7.87 (200)
	Net Weight	lbs (kg)		18.74 (8.5)
	Number of Fan Speeds			4
	Airflow (lowest to highest)	CFM		156/197/291/347
	Sound Pressure (lowest to highest)	dB(A)		30/35/40/45
	Air throw Data	ft (m)		24.3 (7.4)
	Moisture removal	Pint/h (L/h)		3.0 (1.47)
	Field Drain Pipe Size O.D.	in (mm)		5/8 (16)



Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.
For Compatibility See Product Data

Accessories

KSACN0901AAA	Wired Remote Control 7 Day Programmable
KSACN0101AAA	Wired Remote Control with Timer Function
KSAIF0601AAA	Wi-Fi™ Kit High Wall Mid-Tier
KSAIC0301230	24V Interface Kit 230V

Construction View

Indoor Model: 40MHHAQ12XA3

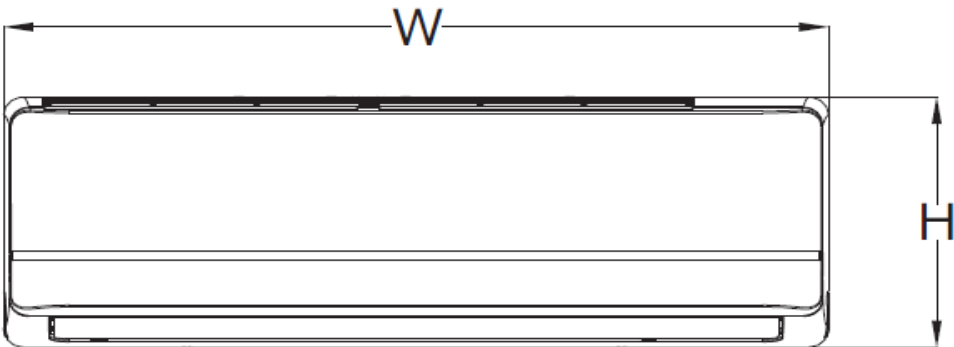

Unit Width	in (mm)	31.57 (802)
Unit Height	in (mm)	11.61 (295)
Unit Depth	in (mm)	7.87 (200)
Net Weight	lbs (kg)	18.74 (8.5)

