

High Wall Heat Pump Ductless System



Indoor Model: 40MAHBQ36XA3


Submittal Data

Job Data: Location:

Buyer: Buyer P.O. #: Carrier #:

Unit Number: Model Number:

Performance Data Certified By: Date:

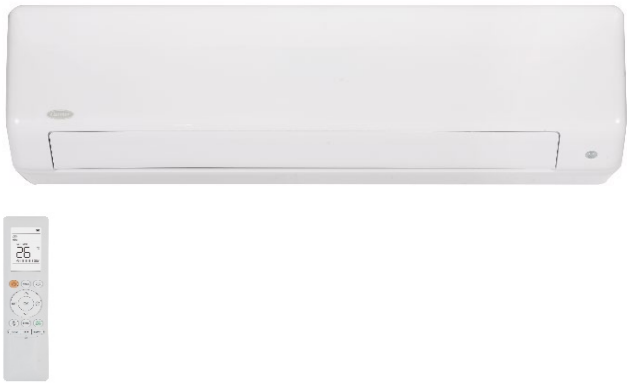

STANDARD FEATURES

- Modes: Cool, Heat, Dry, Fan, Auto
- Turbo Mode
- Four fan speeds
- Sleep Mode
- Relative Humidity Sensor
- Intelligent Eye (Occupancy Sensor)
- ECO Mode
- Up-Down Louver control (fixed or swing)
- Follow Me (senses temperature at handheld remote)
- Heating Setback (46° F Heating Mode)
- Quiet indoor operation
- Aluminum Golden Hydrophilic pre-coated fins

CONTROLS:

- Wireless Remote Controller included with indoor unit

Performance
SERIES

LIMITED WARRANTY*

- 10 year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years
- *For residential applications. See warranty for full details.

| | | | |
|-----------------|--|-------------------------------------|---------------|
| System | Size | 36 | |
| | Indoor Model | 40MAHBQ36XA3 | |
| Electrical | Voltage, Phase, Cycle | V/Ph/Hz | 208/230-1-60 |
| | Power Supply | Indoor unit powered by outdoor unit | |
| | MCA | A. | 0.625 |
| Controls | Wireless Remote Controller (°F/°C Convertible) | Standard | |
| | Wired Remote Controller (°F/°C Convertible) | Optional | |
| Operating Range | Cooling Indoor DB Min -Max | °F(°C) | 63~90 (17~32) |
| | Heating Indoor DB Min -Max | °F(°C) | 32~86 (0~30) |
| Piping | Pipe Connection Size - Liquid | in (mm) | 3/8 (9.52) |
| | Pipe Connection Size - Suction | in (mm) | 5/8 (16) |

| | | | |
|----------------------------|------------------------------------|--------------|-----------------|
| Indoor Coil | Face Area | Sq. Ft. | 3.60 |
| | No. Rows | 3 | |
| | Fins per inch | 20 | |
| | Circuits | 7 | |
| Indoor | Unit Width | in (mm) | 44.88 (1140) |
| | Unit Height | in (mm) | 14.57 (370) |
| | Unit Depth | in (mm) | 10.83 (275) |
| | Net Weight | lbs (kg) | 43.65 (19.8) |
| | Number of Fan Speeds | 4 | |
| | Airflow (lowest to highest) | CFM | 382/506/639/843 |
| | Sound Pressure (lowest to highest) | dB(A) | 39/41/46/52 |
| | Air throw Data | ft (m) | 33.8 (10.3) |
| | Moisture removal | Pint/h (L/h) | 0.240 (0.115) |
| Field Drain Pipe Size O.D. | in (mm) | 0.625 (16) | |



Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.
For Compatibility See Product Data

Accessories

| | |
|--------------|--|
| KSACN0801AAA | Wired Remote Control 7 day Programmable* |
| KSAIF0601AAA | Wi-Fi™ Kit High Wall Mid-Tier |
| KSAIC0301230 | 24V Interface Kit 230V |

Construction View

Indoor Model: **40MAHBQ36XA3**

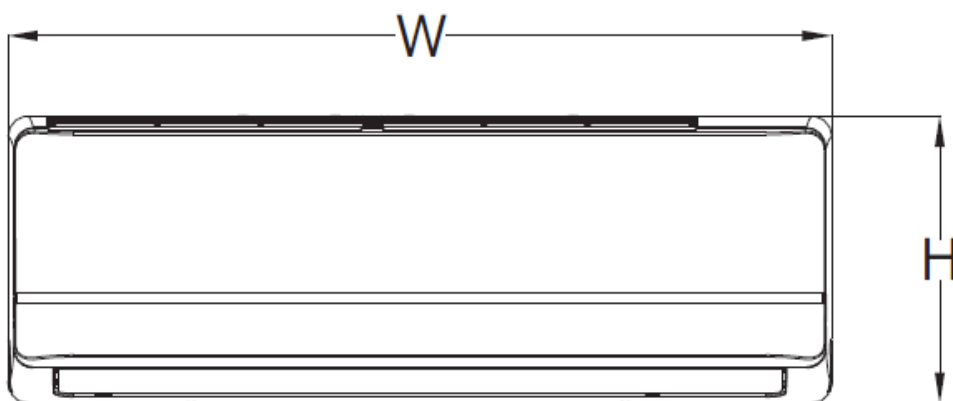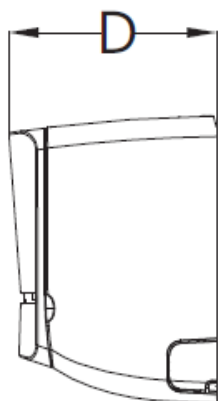

| | | |
|-------------|----------|--------------|
| Unit Width | in (mm) | 44.88 (1140) |
| Unit Height | in (mm) | 14.57 (370) |
| Unit Depth | in (mm) | 10.83 (275) |
| Net Weight | lbs (kg) | 43.65 (19.8) |

