High Wall Heat Pump Ductless System

Indoor Model:

619AHBQ12XA3



Submittal Data

| Job Data: | | Location: | |
|--------------|--------------------------------|---------------|--|
| Buyer: | Buyer P.O. #: | Carrier #: | |
| Unit Number: | | Model Number: | |
| | Performance Data Certified By: | Date: | |



Performance SERIES

| System | Size | | 12 | |
|------------|--|---------|---------------|--|
| System | Indoor Model | | 619AHBQ12XA3 | |
| | Voltage, Phase, Cycle | V/Ph/Hz | 208/230-1-60 | |
| Electrical | Power Supply Indoor unit powered by outdoor unit | | | |
| | MCA | A. | 0.3125 | |
| Controls | Wireless Remote Controller (°F/°C Convertible) | | Standard | |
| Controls | Wired Remote Controller (°F/°C Convertible) | | Optional | |
| Operating | Cooling Indoor DB Min -Max | °F(°C) | 63~90 (17~32) | |
| Range | Heating Indoor DB Min -Max | °F(°C) | 32~86 (0~30) | |
| Piping | Pipe Connection Size - Liquid | in (mm) | 1/4 (6.35) | |
| i ipilig | Pipe Connection Size - Suction | in (mm) | 1/2 (12.7) | |

STANDARD FEATURES

- · Modes: Cool, Heat, Dry, Fan, Auto
- Turbo Mode
- Four fan speeds
- Sleep Mode
- · Relative Humidity Sensor
- Intelligent Eye (Occupancy Sensor)
- ECO Mode
- Up-Down Louver control (fixed or swing)
- Follow Me (senses temperature at handheld remote)
- Heating Setback (46° F Heating Mode)
- Quiet indoor operation
- · Aluminum Golden Hydrophilic pre-coated fins

CONTROLS:

• Wireless Remote Controller included with indoor unit

LIMITED WARRANTY*

• 10 year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years *For residential applications. See warranty for full details.

| | Face Area | Sq. Ft. | 2.15 |
|--------------|------------------------------------|-----------------|-----------------|
| Indoor Coil | No. Rows | | 2 |
| IIIdooi Coii | Fins per inch | | 20 |
| | Circuits | 3 | |
| | Unit Width | in (mm) | 31.3 (795) |
| | Unit Height | in (mm) | 11.61 (295) |
| | Unit Depth | in (mm) | 8.86 (225) |
| | Net Weight | lbs (kg) | 22.93 (10.4) |
| | Number of Fan Speeds | | 4 |
| | Airflow (lowest to | CFM | 176/229/335/382 |
| Indoor | highest) | O | 110/220/000/002 |
| illidee! | Sound Pressure (lowest to highest) | dB(A) | 30/32/37/47 |
| | Air throw Data | ft (m) | 26.2 (8.0) |
| | Moisture removal | Pint/h (L/h) | 0.046(0.022) |
| | Field Drain Pipe Size O.D. | in (mm) | 0.625 (16) |

Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data. For Compatibility See Product Data

Edition Date: 02/2021

Catalog No: SUB619AHB-12-3-01


Accessories


| KSACN0801AAA | Wired Remote Control 7 Day Programmable | |
|--------------|---|--|
| KSAIF0601AAA | Wi-Fi™ Kit High Wall Mid-Tier | |
| KSAIC0301230 | 24V Interface Kit 230V | |

Construction View



619AHBQ12XA3



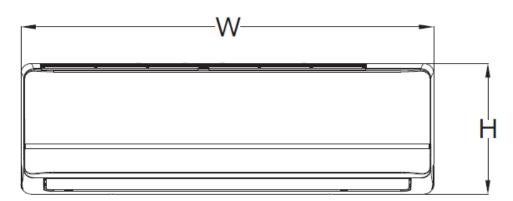

| Unit Width | in (mm) | 31.3 (795) |
|-------------|----------|--------------|
| Unit Height | in (mm) | 11.61 (295) |
| Unit Depth | in (mm) | 8.86 (225) |
| Net Weight | lbs (kg) | 22.93 (10.4) |



