



i-Vu® Building Automation System ComfortVu™ BACnet Thermostat

Line Voltage Plus Model

Part Number: TBPL-H-C



Features

- Large, backlit LCD display with touchscreen occupant controls
- Support for Celsius or Fahrenheit
- BACnet MS/TP port for easy integration with the i-Vu system or any BACnet-compliant BMS
- On-board DIP switches to configure equipment type and sequence of operation
- 2 universal inputs, 2 analog outputs and 6 digital outputs
- Available in one 120/220 Vac models (International only, not UL approved): Temperature only (#TBPL-H-C)

Supported Functions

- Manage 7-day schedules via the thermostat
- Manage setpoints, occupancy status, fan speed, and heating/cooling mode via the thermostat or BACnet BMS
- Support for Title 24 demand response/economizer FDD and IECC2015 economizer FDD when connected to a BMS

Equipment Compatibility


- Rooftop Units
- Heat Pumps
- Fan Coils
- Exhaust Fans
- Unit Heaters

Supported Applications (depends on available I/O)

- Up to 3 stages of heat / 2 stages of cool / up to 3 fan speeds
- 2 pipe / 4 pipe cooling / heating valves (0-10V normally closed only)
- VFD (0-10V)
- Economizer (open/close)
- Reversing valve
- Humidifier (0-10V) / Reheat (dehumidify)



Carrier's ComfortVu™ BACnet thermostats offer local control of a building's heating, ventilating and air-conditioning (HVAC) system as well as remote control from any BACnet-compliant building management system (BMS), including Carrier's i-Vu® building automation system.

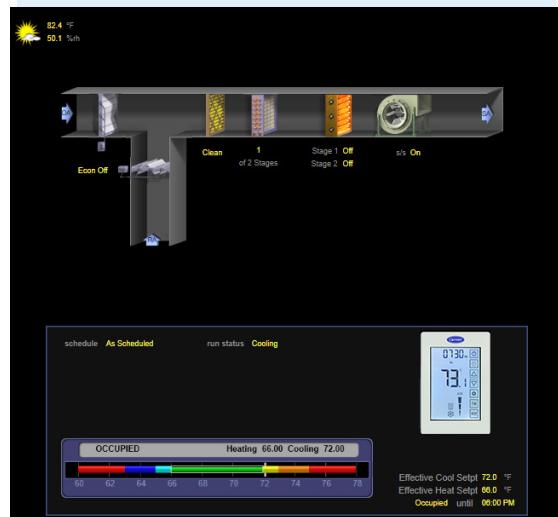

Seamless integration with the i-Vu® building automation system makes it easy to view, schedule, and manage the connected HVAC system.

i-Vu® Building Automation System

ComfortVu™ BACnet Thermostat

Line Voltage Plus Model

Part Number: TBPL-H-C



Specifications

Power Requirements	85-240 Vac line voltage: 1.5 VA unit, 920 VA full load		
Communication	BACnet MS/TP with baud rates up to 76.8 kbps, detected and set automatically by the BACnet Thermostat. Max 127 devices.		
Real-Time Clock	Real-time clock keeps track of time in the event of a power failure for up to 7 days.		
Display	Backlit Touchscreen, °F or °C Selectable		
Sensing Element	Temperature	Range	41° to 95°F (5° to 35°C)
	Accuracy		±1.0°F (0.5°C)
	Humidity	Range	10% to 90%
		Accuracy	±3.0% typical
Inputs	T1, 0 – Normally open or normally closed dry contact, or 50 kOhm thermistor @ 25°C A, B - Communication +/- (RS485) In1, 0 - Normally open or Normally closed dry contact, or 50 kOhm thermistor @ 25°C C, R - Power: 24 Vac for part numbers TBPL-24-C and TBPL-24-HM-C, or 110-220 Vac line voltage for part numbers TBPL-C and TBPL-HM-C		
Outputs	11, 12, 13 – Digital outputs, 3A; 14, 15, 16 – Digital outputs 0.3A; A01, A02 - Analog output 0-10 Vdc, 5 mA max., not isolated (normally closed valves)		
Environmental Operating Range	50° to 122°F (10° to 50°C), 10 to 90% relative humidity, non-condensing		
Compliance	United States of America: FCC CFR47, Chapter 1, Subchapter A, Part 15, Class B; Canada: Industry Canada Compliant, ICES-003, Class B; Europe: CE-Mark Low Voltage Directive: 2014/35/EU RoHS Compliant: 2011/65/EU; Australia and New Zealand: C-Tick Mark, AS/NZS 61000-6-3 CA Prop 65 Warning: This product can expose you to chemicals including Styrene and 1,3 – Propane sulfone, which are known to the State of California to cause cancer. Go to www.p65warnings.ca.gov		
Physical	Fire-retardant plastic ABS, UL94V-0		
Mounting	Wall mount on a standard 4" x 2-1.2 x 2" electrical box using provided 6/32 x 1/2" mounting screws		

Dimensions

Overall

Weight: 9.7 oz (0.28 kg)

