

# VRF Indoor Unit 40VMU030---3—Under Ceiling / Floor



## Submittal Data

Job Data \_\_\_\_\_ Location \_\_\_\_\_  
 Buyer \_\_\_\_\_ Buyer PO # \_\_\_\_\_ Carrier # \_\_\_\_\_  
 Unit Number \_\_\_\_\_ Model Number \_\_\_\_\_  
 Performance Data Certified By \_\_\_\_\_ Date \_\_\_\_\_



### STANDARD FEATURES

- Convertible Under Ceiling or Floor Installation
- Three Fan Speeds - High, Medium, and Low
- Louver Control (Fixed or Swing)
- Built-in IR Receiver and Display Panel
- Built in EXV (Electronic Expansion Valve) for Installation Ease


INDOOR UNIT MODEL		40VMU030---3
<b>PERFORMANCE</b>		
Cooling Rated Capacity	Btu/h	30,000
Heating Rated Capacity	Btu/h	34,000
Airflow (H / M / L)	CFM	729 / 676 / 624
Sound Pressure (H / M / L)	dBA	51.5 / 49.6 / 47.9
<b>ELECTRICAL</b>		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	107
Minimum Circuit Amps (MCA)	A	1.40
Maximum Overcurrent Protection	A	15
Motor Type		DC

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	5/8 (OD)
Refrigerant		R-410A
Unit Width	in.	50-1/2
Unit Height	in.	26
Unit Depth	in.	8
Net Unit Weight	lbs.	77

### ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

**DIMENSIONAL DRAWING**  
**INDOOR UNIT UNDER CEILING / FLOOR 40VMU030---3**

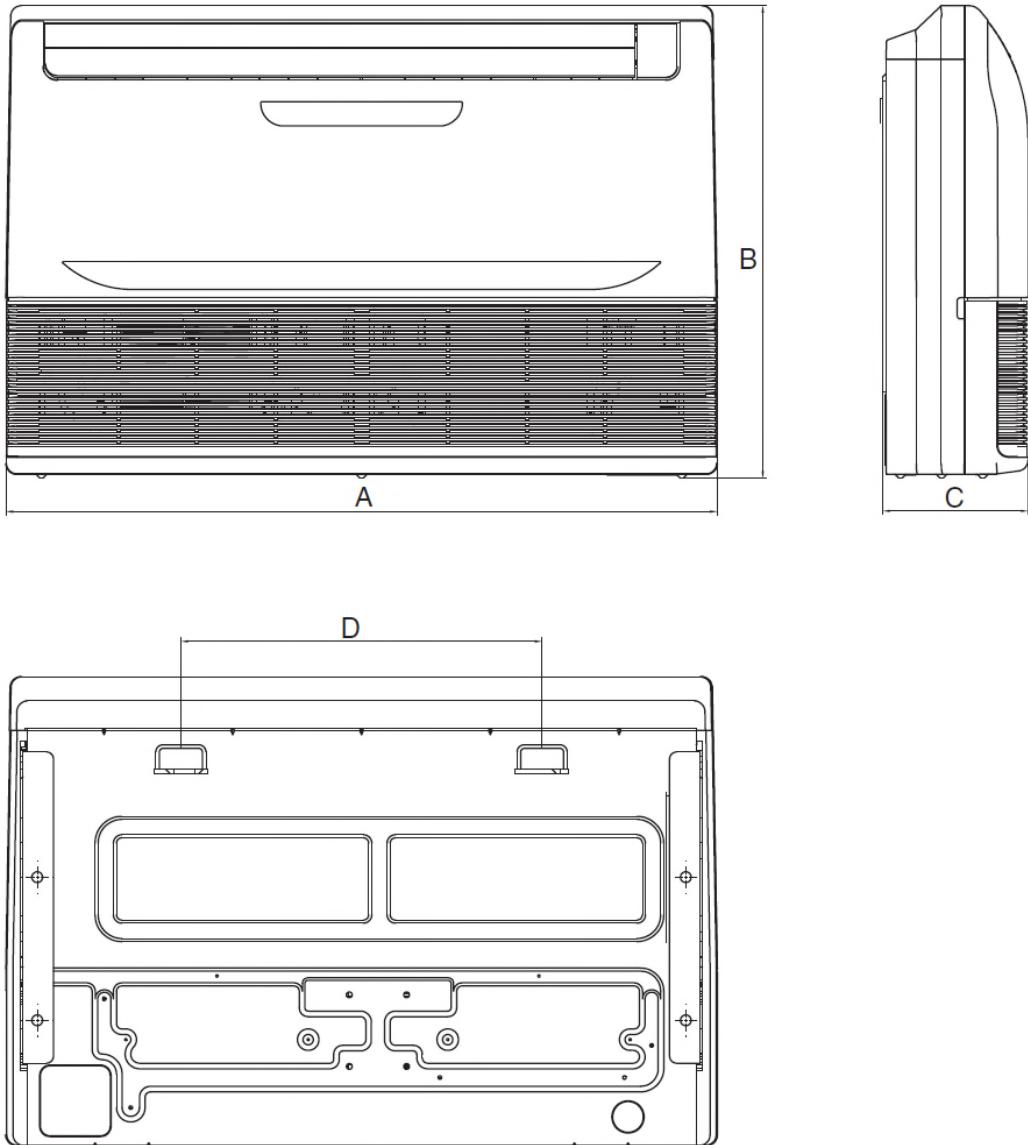

40VMU UNIT SIZE	DIMENSION (in.)			
	A	B	C	D
030	50-1/2	26	8	31-1/4

NOTE: All dimensions shown in inches.



© Carrier Corporation 2018