

VRF Indoor Unit 40VMA036---3—Outside Air Unit



Submittal Data

Job Data _____ Location _____
Buyer _____ Buyer PO # _____ Carrier # _____
Unit Number _____ Model Number _____
Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Ducted Supply and Return Opening
- Three Fan Speeds - High, Medium and Low
- Built in Drain Pump from Factory
- Built in EXV (Electronic Expansion Valve) for Install Ease

INDOOR UNIT MODEL		40VMA036---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	36,000
Heating Rated Capacity	Btu/h	24,000
Airflow (H / M / L)	CFM	588 / 529 / 441
Sound Pressure (H / M / L)	dBA	49.5 / 47.8 / 43.8
ELECTRICAL		
Power Supply	V/Ph/ Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	64
Minimum Circuit Amps (MCA)	A	5.7
Maximum Overcurrent Protection	A	15.0
Motor Type		DC

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Discharge Gas	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	1 (OD)
Maximum External Static Pressure (ESP)	in. wg	0.8
Refrigerant		R-410A
Unit Width	in.	51-3/16
Unit Height	in.	16-1/2
Unit Depth	in.	27-3/16
Net Unit Weight	lb	161.4


ACCESSORIES

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900012
- ☐ Wired Remote Controller - Prog. 40VM900013
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

DIMENSIONAL DRAWING OUTSIDE AIR INDOOR UNIT 40VMA036---3

Unit: inch[mm]

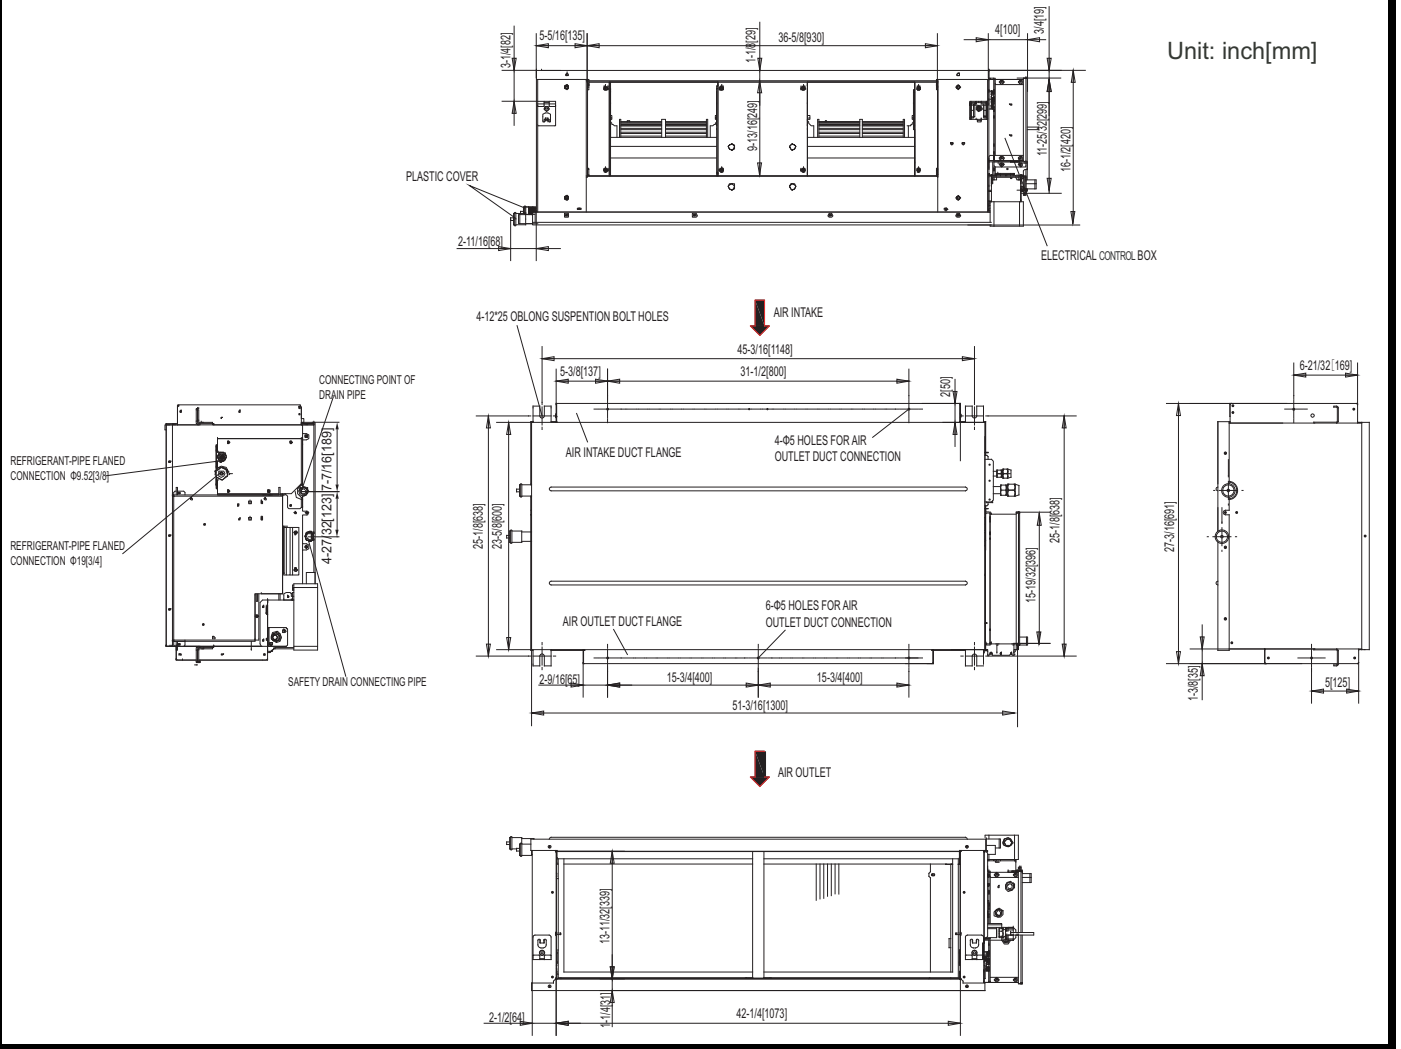

© Bryant Heating & Cooling Systems 2018

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

Printed in U.S.A.

Form 40VMA036-B-2SD

Pg 2

06-18

Replaces: 40VMA036-B-1SD