


VRF Indoor Unit 40VMV018---3 — Vertical AHU



Submittal Data

Job Data _____ Location _____
Buyer _____ Buyer PO # _____ Carrier # _____
Unit Number _____ Model Number _____
Performance Data Certified By _____ Date _____

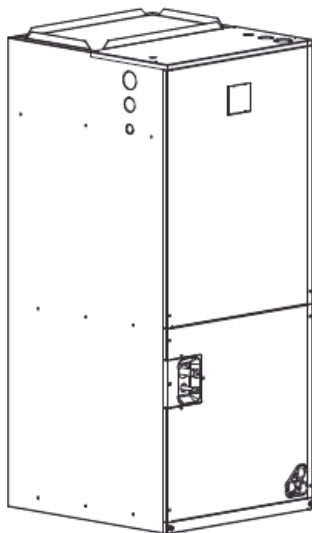

STANDARD FEATURES

- Dual Drainage Spouts
- Three Fan Speeds - High, Medium and Low
- Unit can be Installed Standing Vertically or Laid Horizontally
- DC Fan Motor
- Built in EXV (Electronic Expansion Valve) for Installation Ease
- Removable Front Panel Provides Easy Access

Indoor Unit Model		40VMV018---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	18,000
Heating Rated Capacity	Btu/h	21,000
Airflow (H / M / L)	CFM	600 / 510 / 420
Sound Pressure (H / M / L)	dBA	41.6 / 37.1 / 34.4
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Motor Type		DC
Indoor Unit Fan Motor Power Consumption (Input)	W	60
Minimum Circuit Amps	A	3.8
Maximum Overcurrent Protection	A	15

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	3/4 (NPT)
Refrigerant		R-410A
Unit Width	in.	19-5/8
Unit Height	in.	46-1/2
Unit Depth	in.	20-5/8
Net Weight	lb	123

ACCESSORIES (Optional)

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

DIMENSIONAL DRAWING INDOOR UNIT VERTICAL AHU 40VMV018---3

