

# SMMS-e Single VRF Outdoor Unit MCY-MAP0367HS-UL—Heat Pump

**TOSHIBA**  
*Carrier*

## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_

Tag \_\_\_\_\_



### SMMS-e VRF Heat Pump Features

- 3, 4, and 5-ton single-phase modules available
- Modules have inverter-driven twin rotary compressor
- 591 ft (180 m) actual total system piping (liquid line)
- 328 ft (100 m) actual piping length from outdoor unit to furthest fan coil
- Up to 330 ft (100 m) control wiring between outdoor units
- Up to 6560 ft (2000 m) control wiring between the outdoor units and indoor units

- Operating temperature range  
Cooling (db): 23 to 122 F (-5 to 50 C)
- Heating (wb): -13 to 60 F (-25 to 15.6 C)
- Protection: high pressure sensor and switch, low pressure sensor, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty, 5-year parts limited warranty

Header Unit Model		MCY-MAP0367HS-UL	
<b>PERFORMANCE</b>			
Nominal Cooling Capacity	Btu/h	36,000	
Nominal Heating Capacity	Btu/h	40,000	
Maximum Total Connected Indoor Unit Capacity		Up to 135%	
<b>COOLING EFFICIENCY†</b>			
SEER2, Ducted FCUs	Btu/Wh	20.10	
SEER2, Ductless FCUs	Btu/Wh	22.80	
<b>HEATING EFFICIENCY†</b>			
HSPF2, Ducted FCUs		10.00	
HSPF2, Ductless FCUs		10.90	
Fan Type (Qty)		Propeller (2)	
Airflow	CFM	4520	
Combined System Sound Pressure, Cooling/Heating	dBA	52.0/56.0	
<b>ELECTRICAL</b>			
Power Supply	V/Ph/Hz	208-230/1/60	
Minimum Circuit Amps (MCA)	A	36.3	
Recommended Fuse Size	A	40	

### COMPRESSORS

Type (Number)		Hermetic Twin Rotary (1)
Motor Output	kW	3.75

### FAN MOTOR

Motor Type (Steps)	Propeller Fan (2)
Motor Output	kW

### PHYSICAL DATA

Pipe Connection Size - Liquid (High Pressure)	in.	3/8 (Flare)
Pipe Connection Size - Gas (Low Pressure)	in.	5/8 (Flare)
Refrigerant		R-410A
Factory Charge††	lb	14.8
External Finish		Munsell 1Y8.5/0.5
Unit Width	in.	39.8
Unit Height	in.	61.0
Unit Depth	in.	14.6
Unit Net Weight	lb	311

### LEGEND

db	— Dry Bulb
SEER	— Seasonal Energy Efficiency Ratio
FCU	— Fan Coil Unit
HSPF	— Heating Seasonal Performance Factor
wb	— Wet Bulb


†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 210/240 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db

Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

††Additional charge required.

# OUTDOOR UNIT HEAT PUMP MCY-MAP0367HS-UL DIMENSIONAL DRAWING

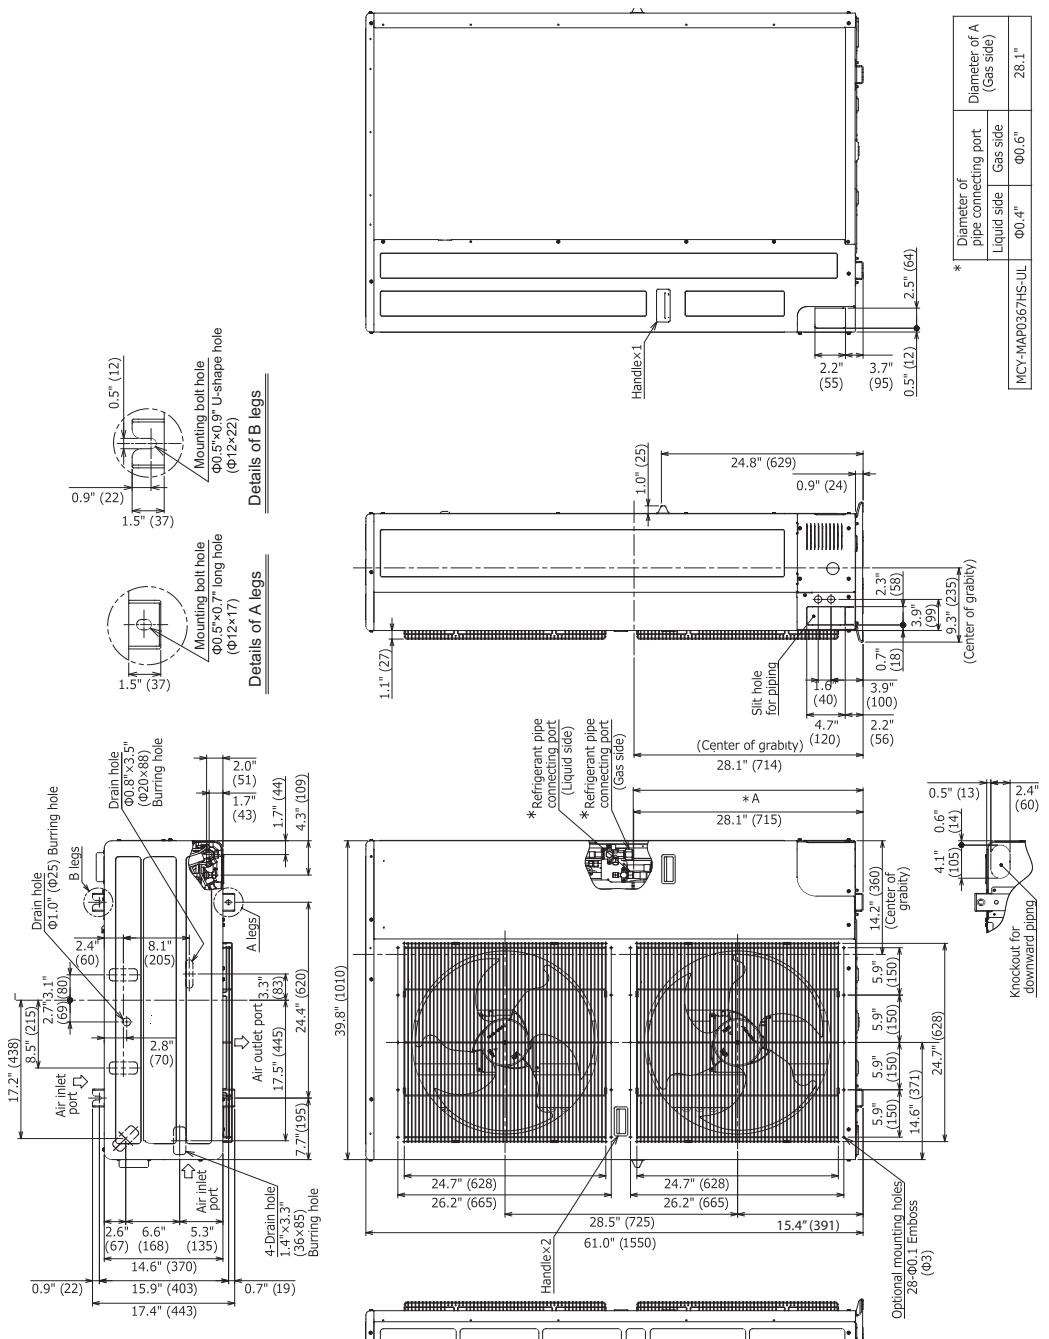

Unit : in (mm)



© 2022 Carrier Corporation. All rights reserved.  
A Carrier Company

Edition Date: 11/22  
Printed in U.S.A.

**Form No: MCY-MAP0367HS\_UL\_02**  
Replaces: MCY-MAP0367HS-UL\_01

**Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.**