

VRF Indoor Unit 40VMC007---3—Compact 4-Way Cassette



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Delivers air in all four directions
- Three fan speeds - high, medium, and low
- Built-in condensate lift mechanism
- Condensate lift 23-5/8 inches
- Built in EXV (Electronic Expansion Valve) for installation ease
- No outside air connection
- Branch duct for supply (blank off required)
- Panel/grill (40VMC001-----) - ordered separately

INDOOR UNIT MODEL		40VMC007---3
PERFORMANCE		
Total Cooling Rated Capacity	Btu/h	7,000
Sensible Cooling Capacity	Btu/h	6,100
Total Heating Rated Capacity	Btu/h	8,000
Airflow (H / M / L)	CFM	306 / 282 / 229
Sound Pressure (H / M / L)	dBA	40.4 / 38.5 / 34.7
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	16
Minimum Circuit Amps (MCA)	A	0.38
Maximum Overcurrent Protection	A	15.0
Motor Type		DC

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	1/4 (OD)
Pipe Connection Size - Suction	in.	1/2 (OD)
Pipe Connection Size - Drain	in.	1 (OD)
Refrigerant		R-410A
Unit Width	in.	24-3/4
Unit Height	in.	10-1/4
Unit Depth	in.	22-7/16
Unit Net Weight	lbs.	40.0
Panel Width	in.	25-1/2
Panel Height	in.	2
Panel Depth	in.	25-1/2
Panel Net Weight	lbs.	5.5

ACCESSORIES

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ 24V Controller 40VM900008
- ☐ Button Sensor 40VM900009

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

Technical drawing of a cryogenic storage dewar, showing three views: front, top, and side. The drawing includes detailed dimensions in inches and fractions of inches.

Front View Dimensions:

- Overall height: 10-1/4
- Body height: 11
- Guard of wire (protrusion 3/4")
- Body, include guard of wire

Top View Dimensions:

- Overall width: 22-7/16 (Body)
- Overall depth: 24-3/4 (Body, including electrical box)
- Hook location dimensions: 20-5/8 (Hook location), 21-7/16 (Hook location)
- Internal width: 11
- Internal depth: 2-3/8
- Electrical box



Side View Dimensions:

- Overall height: 10-1/4
- Body height: 11
- Guard of wire (protrusion 3/4")
- Body, include guard of wire

Internal Components and Dimensions:

- 1/4" Liquid pipe (O.D.)
- 1/2" Gas pipe (O.D.)
- Drainage pipe (O.D.)
- 7/8"
- 6-9/16"
- 1-3/16"
- 8-7/16"
- 6-1/8"
- 4-15/16"


DIMENSIONAL DRAWING **INDOOR UNIT COMPACT 4-WAY CASSETTE 40VMC007---3**

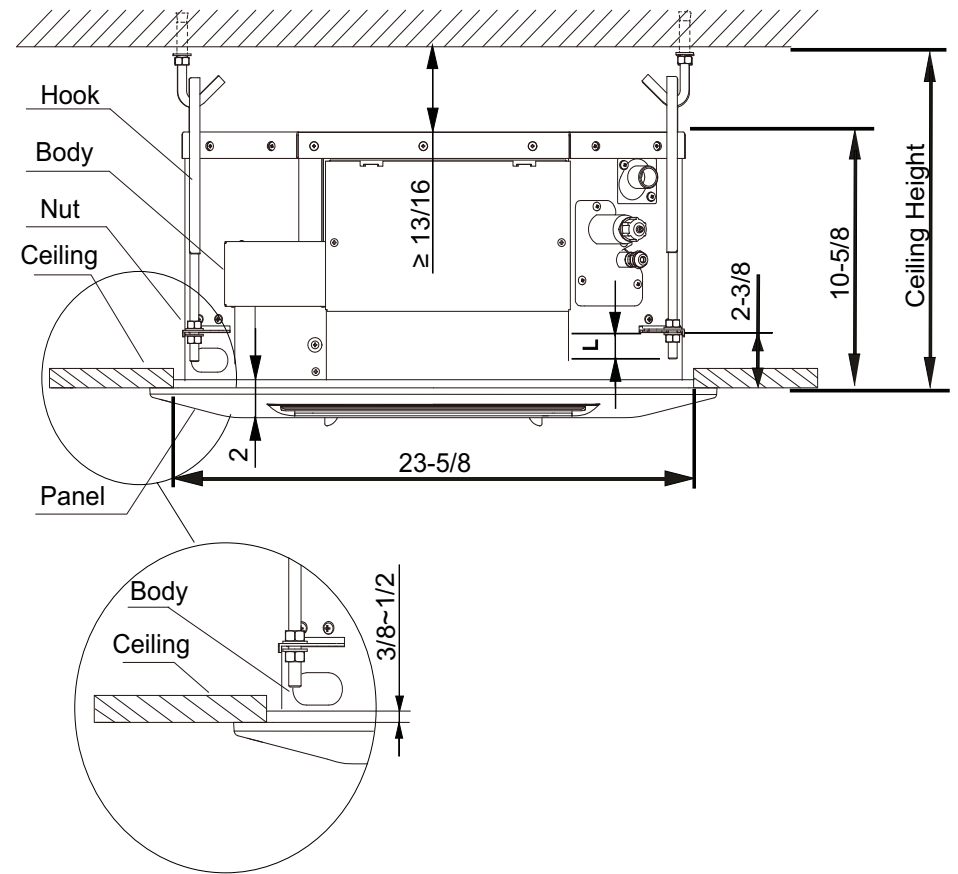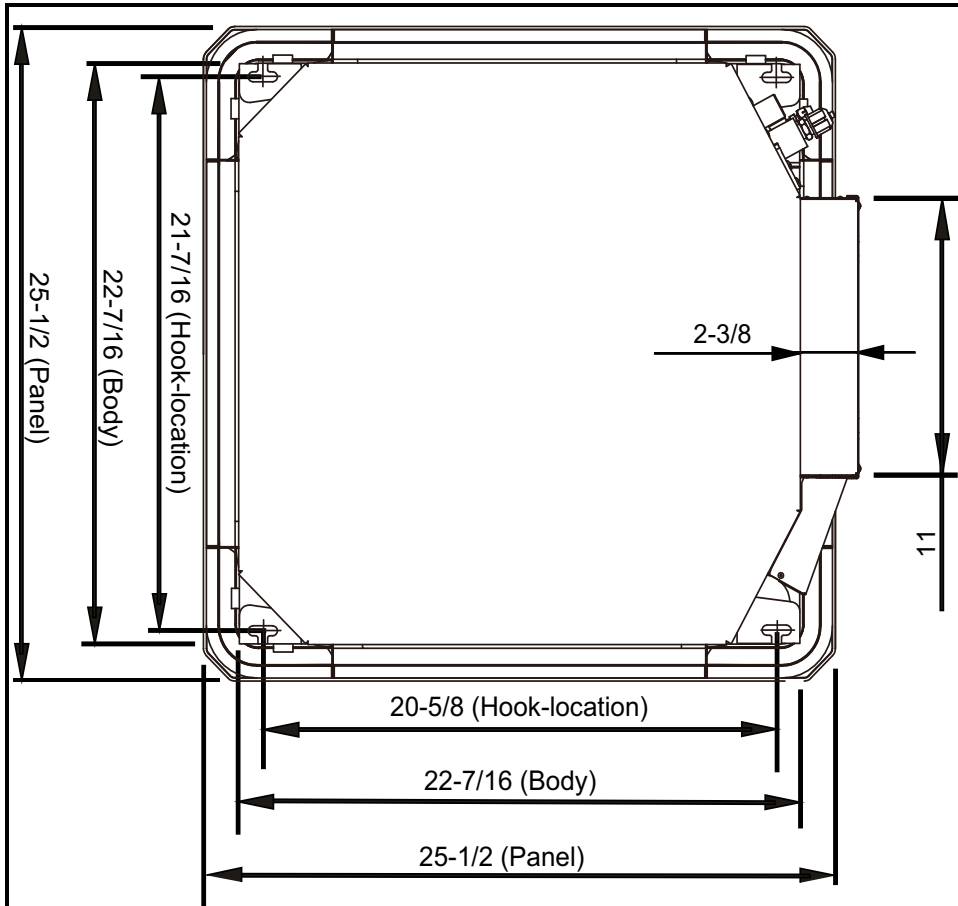


40VMC UNIT SIZE	DIMENSION (in.)
	L
007	1-13/16 ~ 1-1/2

NOTE: All dimensions shown in inches.


RECOMMENDED SERVICE CLEARANCE

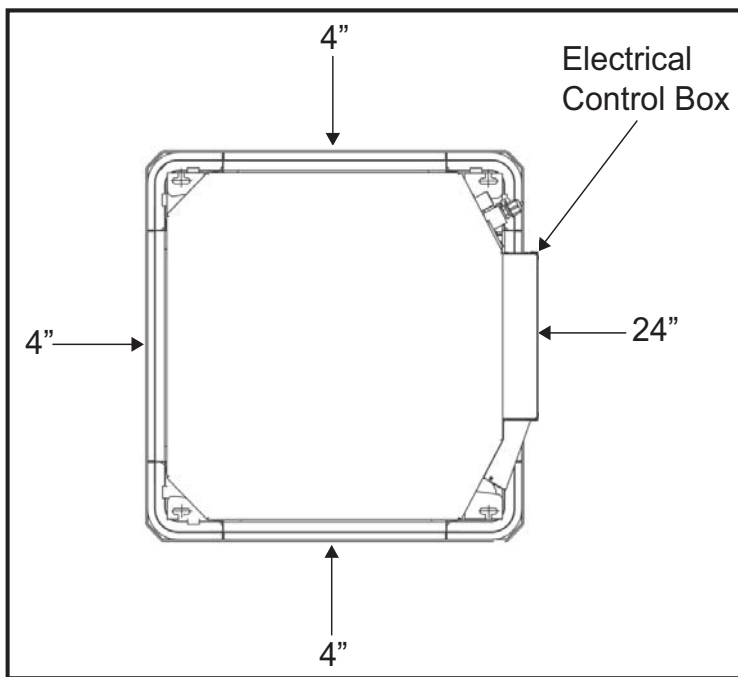


RECOMMENDED AIRFLOW CLEARANCE

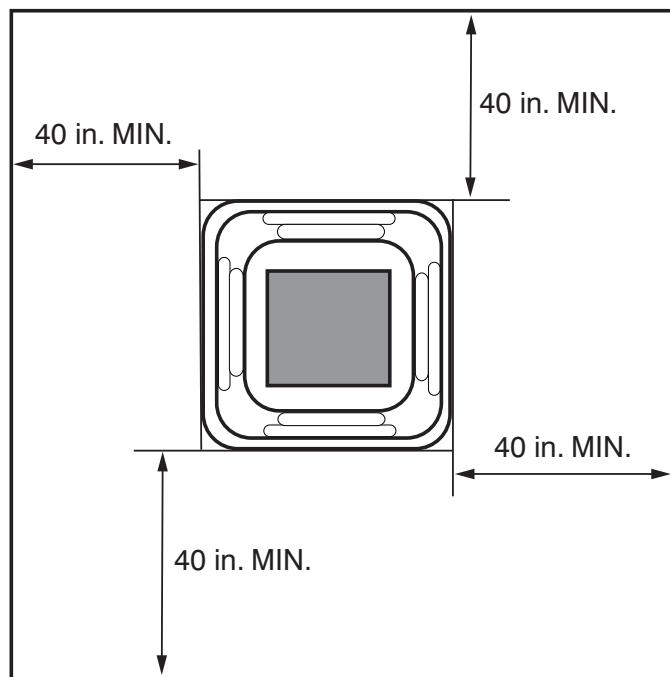

RECOMMENDED CLEARANCE FOR BLOCKING OFF LOUVERS / SUPPLY DUCT OPENING

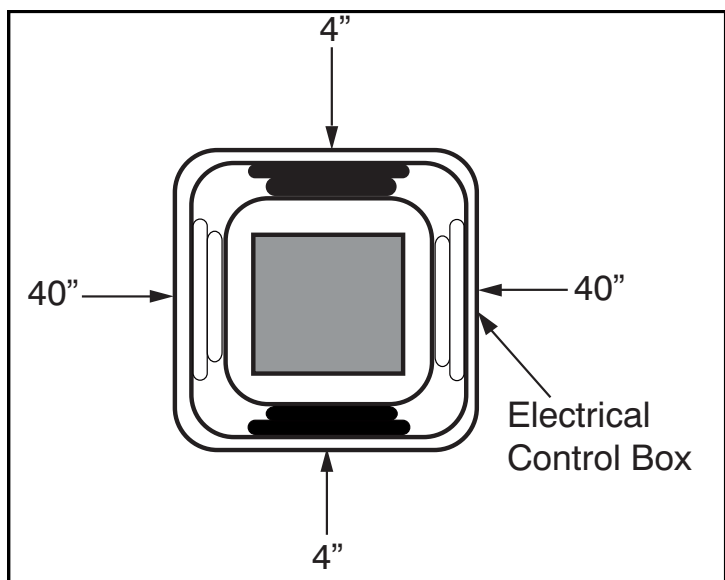

2 Supply Louvers Blocked Off

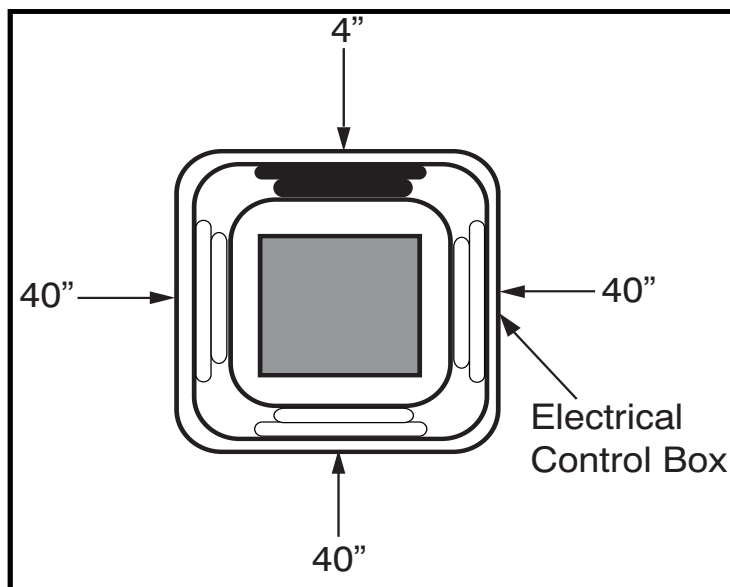

1 Supply Louvers Blocked Off

