

VRF Indoor Unit 40VMM015A--3—Medium Static Duct



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____



STANDARD FEATURES

- Rear Return Air Opening is Standard and Bottom Return is Optional
- Three Fan Speeds - High, Medium, and Low
- Knockout for Outside Air
- Built-in Condensate Lift Mechanism
- Built in EXV (Electronic Expansion Valve) for Installation

INDOOR UNIT MODEL		40VMM015A--3	
PERFORMANCE			
Cooling Rated Capacity	Btu/h	15,000	
Heating Rated Capacity	Btu/h	17,000	
Airflow (H / M / L)	CFM	535 / 450 / 400	
Sound Pressure (H / M / L)	dBA	35.9 / 32.7 / 31.4	
ELECTRICAL			
Power Supply	V/Ph/Hz	208-230/1/60	
Indoor Fan Motor Power Consumption (Input)	W	145	
Minimum Circuit Amps (MCA)	A	3.13	
Maximum Overcurrent Protection	A	15	
Motor Type		DC	


PHYSICAL DATA			
Pipe Connection Size - Liquid	in.	1/4 (OD)	
Pipe Connection Size - Suction	in.	1/2 (OD)	
Pipe Connection Size - Drain	in.	3/4 NPT	
Maximum External Static Pressure (ESP)	in. wg	0.6	
Refrigerant		R-410A	
Unit Width	in.	48-1/2	
Unit Height	in.	10-5/8	
Unit Depth	in.	30-1/2	
Net Unit Weight	lb	99.2	

ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

DIMENSIONAL DRAWING

INDOOR UNIT MEDIUM STATIC DUCT 40VMM015A--3

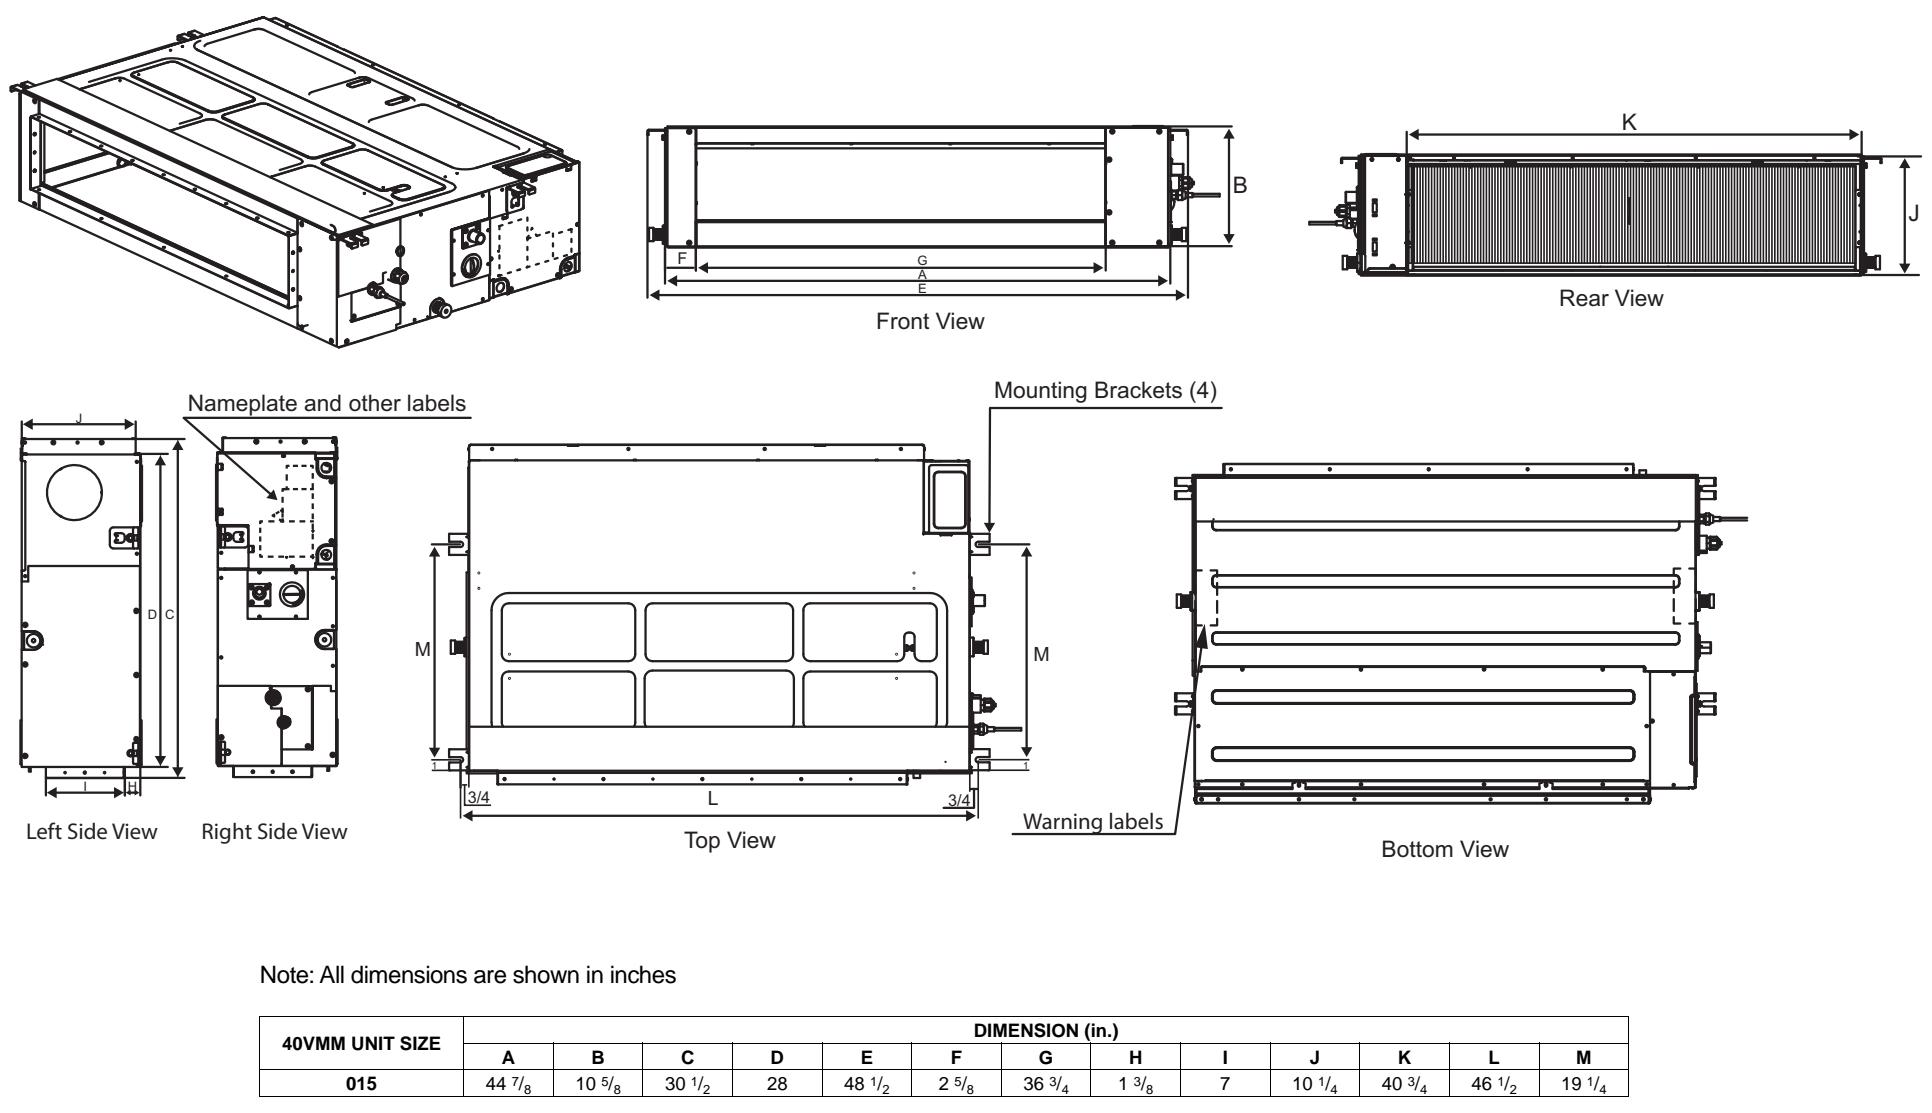

© Carrier Corporation 2018



Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

Printed in U.S.A. Form 40VMM015A-C-1SD

Page 2

04-18

Replaces: 40VMM015-C-1SD