


Submittal Data

Job Name _____ Location _____
Tag _____

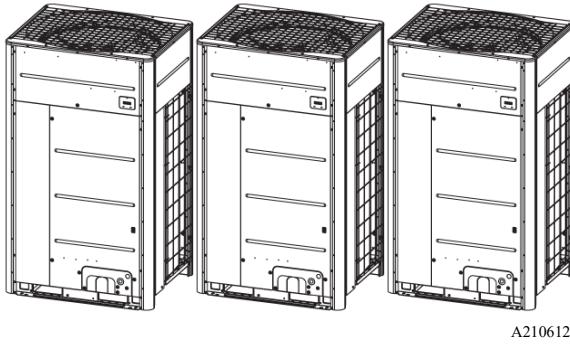

Heat Recovery Features

- Modules and pairings available from 6 to 42 tons
- Modules have inverter-driven rotary compressors
- Direct-drive, inverter-driven outdoor motor
- Up to 3937 ft actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil
- Operating temperature range
Cooling (db): -10° to 125°F
(-15° to 52°C)
Heating (wb): -22° to 60°F
(-25° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Combination Model	MMY-UP4321FT9P-UL	
Header Unit Model	MUP1681FT9P-UL	
Follower Unit Model	MUP1681FT9P-UL	
Follower Unit Model	MUP0961FT9P-UL	
PERFORMANCE		
Nominal Cooling Capacity	Btu/h	432,000
Nominal Heating Capacity	Btu/h	486,000
Maximum Number of Indoor Units		72
SIMULTANEOUS COOLING AND HEATING EFFICIENCY†		
SCHE, Ducted FCUs		25.0
SCHE, Ductless FCUs		26.0
COOLING EFFICIENCY†		
EER/IEER, Ducted FCUs	Btu/Wh	9.8/18.2
Power Consumption, Ducted FCUs	kW	38.07
EER/IEER, Ductless FCUs	Btu/Wh	9.9/20.0
Power Consumption, Ductless FCUs	kW	40.55
HEATING EFFICIENCY†		
COP at 47°F, Ducted FCUs		3.23
Power Consumption, Ducted FCUs	kW	37.95
COP at 47°F, Ductless FCUs		3.48
Power Consumption, Ductless FCUs	kW	37.84
Fan Type (Qty)		Propeller (5)
Airflow, Standard Range	CFM	(8476 x 2) + 6357
Sound Pressure	dBA	67.2
External Static Pressure*	in. wg	0.321
LEGEND		
db	—	Dry Bulb
COP	—	Coefficient of Performance
EER	—	Energy Efficiency Ratio
FCU	—	Fan Coil Unit
IEER	—	Integrated Energy Efficiency Ratio
wb	—	Wet Bulb
SCHE	—	Simultaneous Cooling and Heating Efficiency

*Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db
Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

*Requires setting by menu functions.

††Additional charge required.

NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.

DIMENSIONAL DRAWING

OUTDOOR UNIT MMY-UP4321FT9P-UL

