

VRF Indoor Unit 40VMA054---3—Outside Air Unit



Submittal Data

Job Name _____ Location _____
Tag _____



STANDARD FEATURES

- Ducted Supply and Return Opening
- Three Fan Speeds - High, and, Low
- Built in Drain Pump from Factory (27-1/2 inch lift)
- Built in EXV (Electronic Expansion Valve) for Install Ease


INDOOR UNIT MODEL		40VMA054---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	54,250
Sensible Cooling Capacity	Btu/h	32,720
Heating Rated Capacity	Btu/h	36,000
Airflow (H / M / L)	CFM	765 / 647 / 529
Sound Pressure (H / M / L)	dBA	51.4 / 47.8 / 43.9
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	87
Minimum Circuit Amps (MCA)	A	6.9
Maximum Overcurrent Protection	A	15.0
Motor Type		DC

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Discharge Gas	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	1 (OD)
Minimum External Static Pressure (ESP) (Factory Default)	in. wg	0.2
Maximum External Static Pressure (ESP)	in. wg	0.8
Refrigerant		R-410A
Unit Width	in.	51-3/16
Unit Height	in.	16-1/2
Unit Depth	in.	27-3/16
Net Unit Weight	lb	161.4


ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- 24V Controller 40VM900008
- Button Sensor 40VM900009

**DIMENSIONAL DRAWING
OUTSIDE AIR INDOOR UNIT 40VMA054---3**

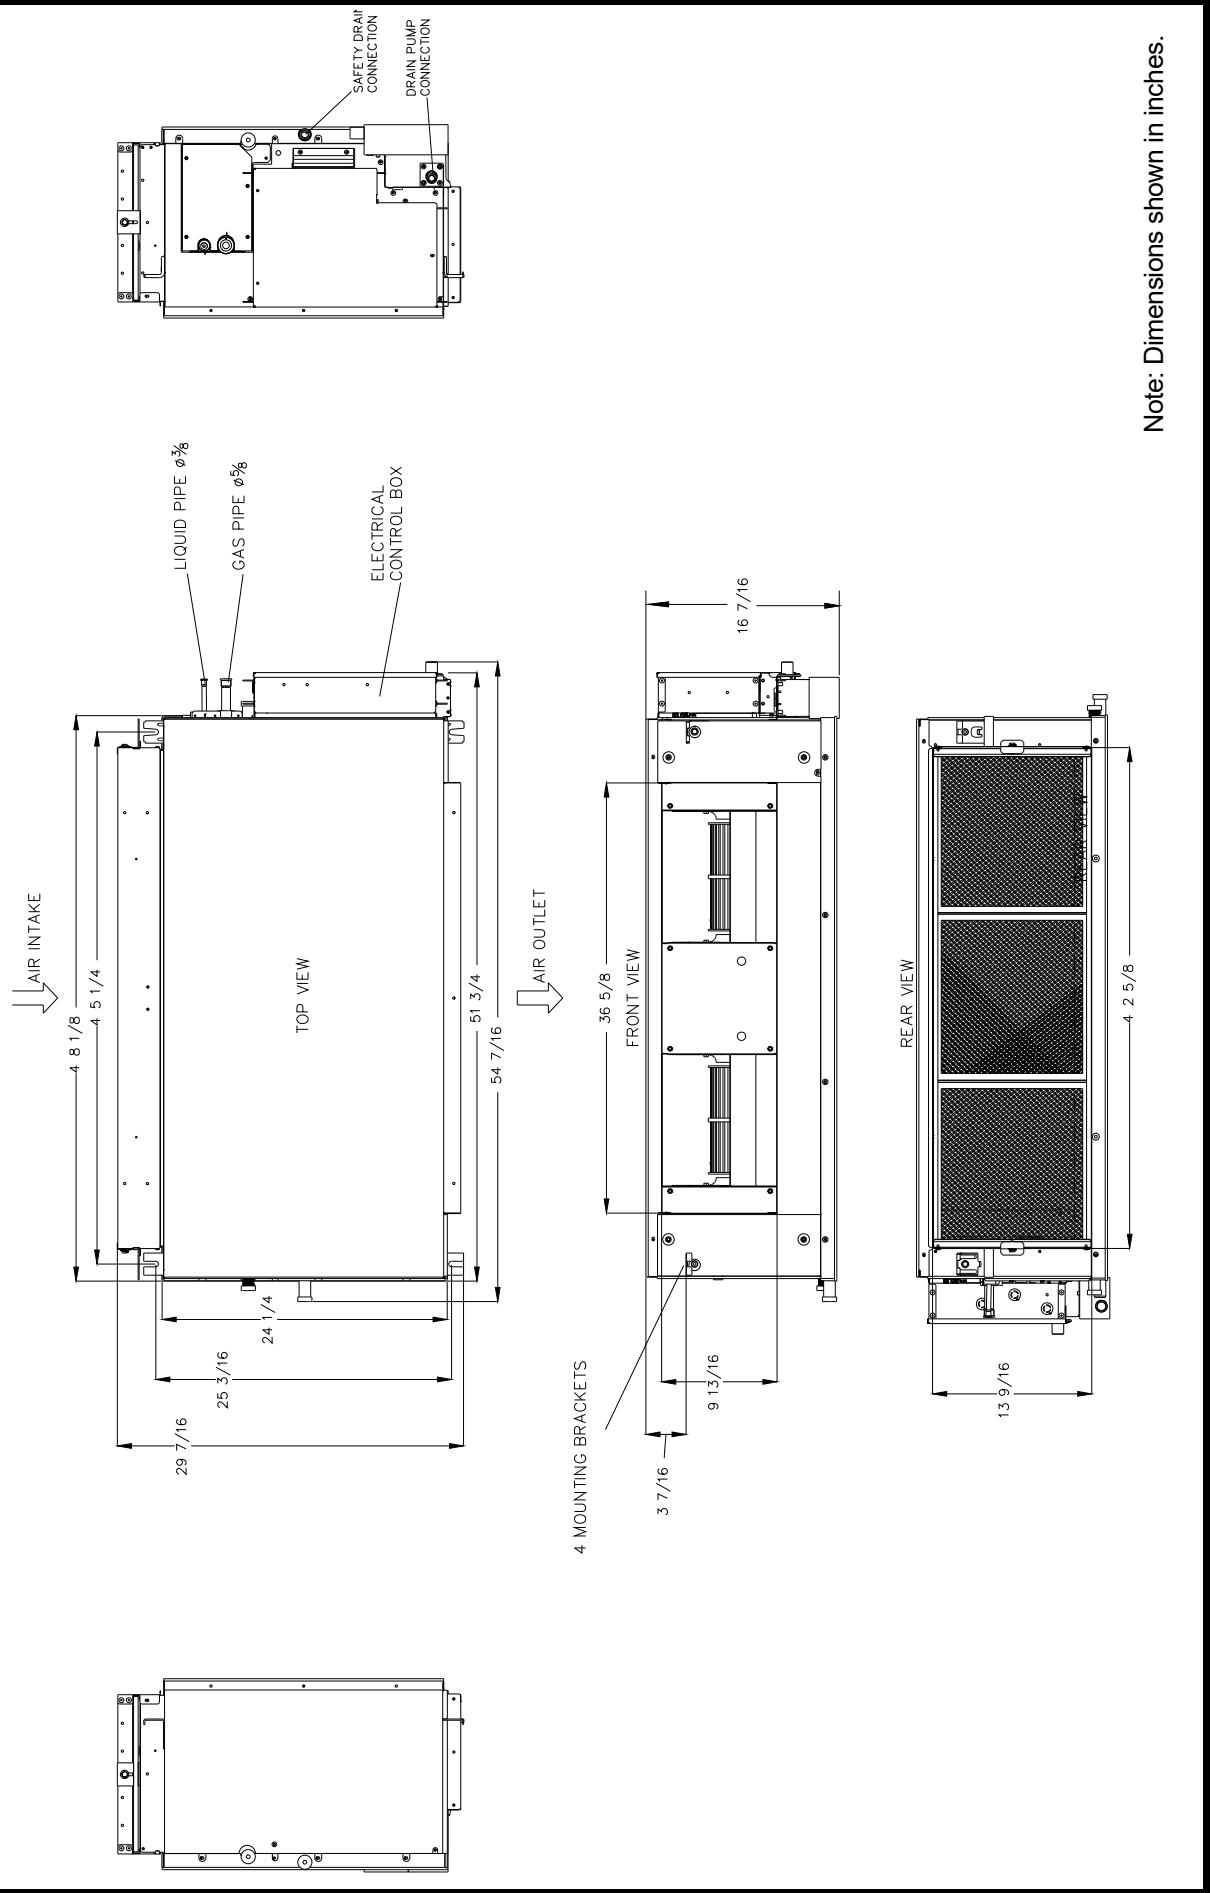

Recommended Service / Maintenance Clearances

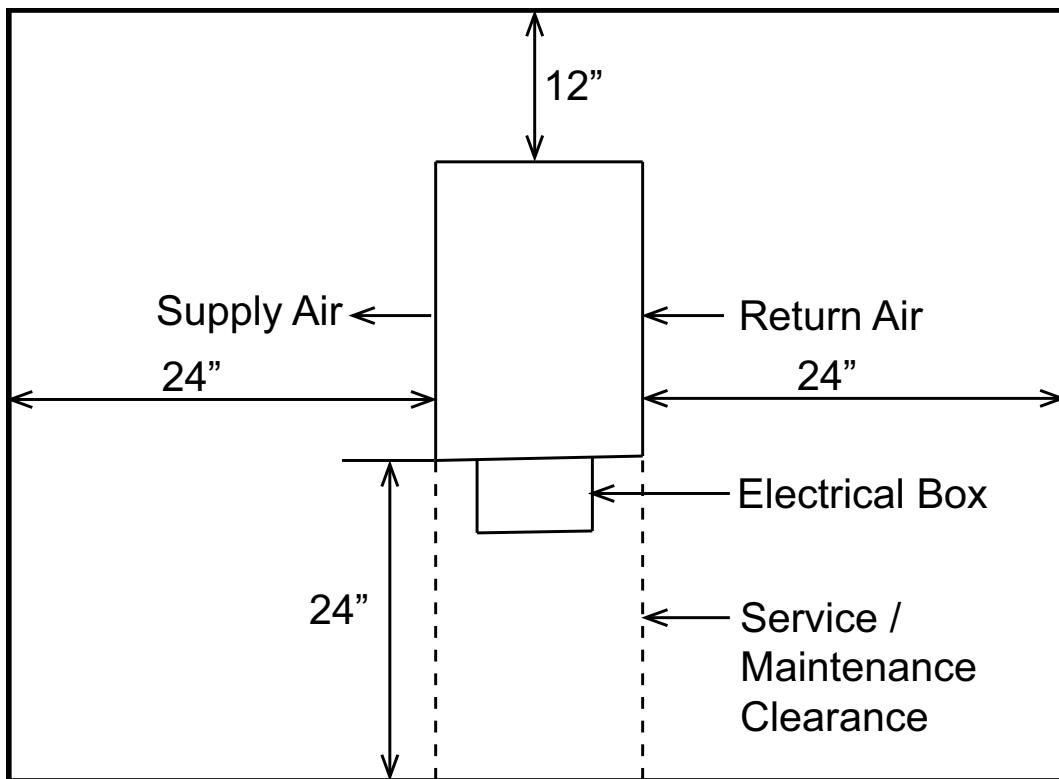

Recommended Mounting Instructions

