

VRF Indoor Unit 40VMC015A--3—Compact 4-Way Cassette



Submittal Data

Job Name _____ Location _____
Tag _____



STANDARD FEATURES

- Delivers air in all four directions
- Three fan speeds - high, medium, and low
- Built-in condensate lift mechanism
- Condensate lift 23-5/8 inches
- Built in EXV (Electronic Expansion Valve) for installation ease
- Outside air connection
- Branch duct for supply (blank off required)
- Panel/grill (40VMC001----) - ordered separately

INDOOR UNIT MODEL		40VMC015A--3
PERFORMANCE		
Total Cooling Rated Capacity	Btu/h	15,210
Sensible Cooling Capacity	Btu/h	9,490
Total Heating Rated Capacity	Btu/h	17,000
Airflow (H / M / L)	CFM	359 / 306 / 253
Sound Pressure (H / M / L)	dBA	45.5 / 42.3 / 38.1
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	24
Minimum Circuit Amps (MCA)	A	0.53
Maximum Overcurrent Protection	A	15.0
Motor Type		DC


PHYSICAL DATA

Pipe Connection Size - Liquid	in.	1/4 (OD)
Pipe Connection Size - Suction	in.	1/2 (OD)
Pipe Connection Size - Drain	in.	1 (OD)
Refrigerant		R-410A
Unit Width	in.	24-3/4
Unit Height	in.	10-1/4
Unit Depth	in.	22-7/16
Unit Net Weight	lbs.	43.0
Panel Width	in.	25-1/2
Panel Height	in.	2
Panel Depth	in.	25-1/2
Panel Net Weight	lbs.	5.5

ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- 24V Controller 40VM900008
- Button Sensor 40VM900009

DIMENSIONAL DRAWING
INDOOR UNIT COMPACT 4-WAY CASSETTE 40VMC015A--3

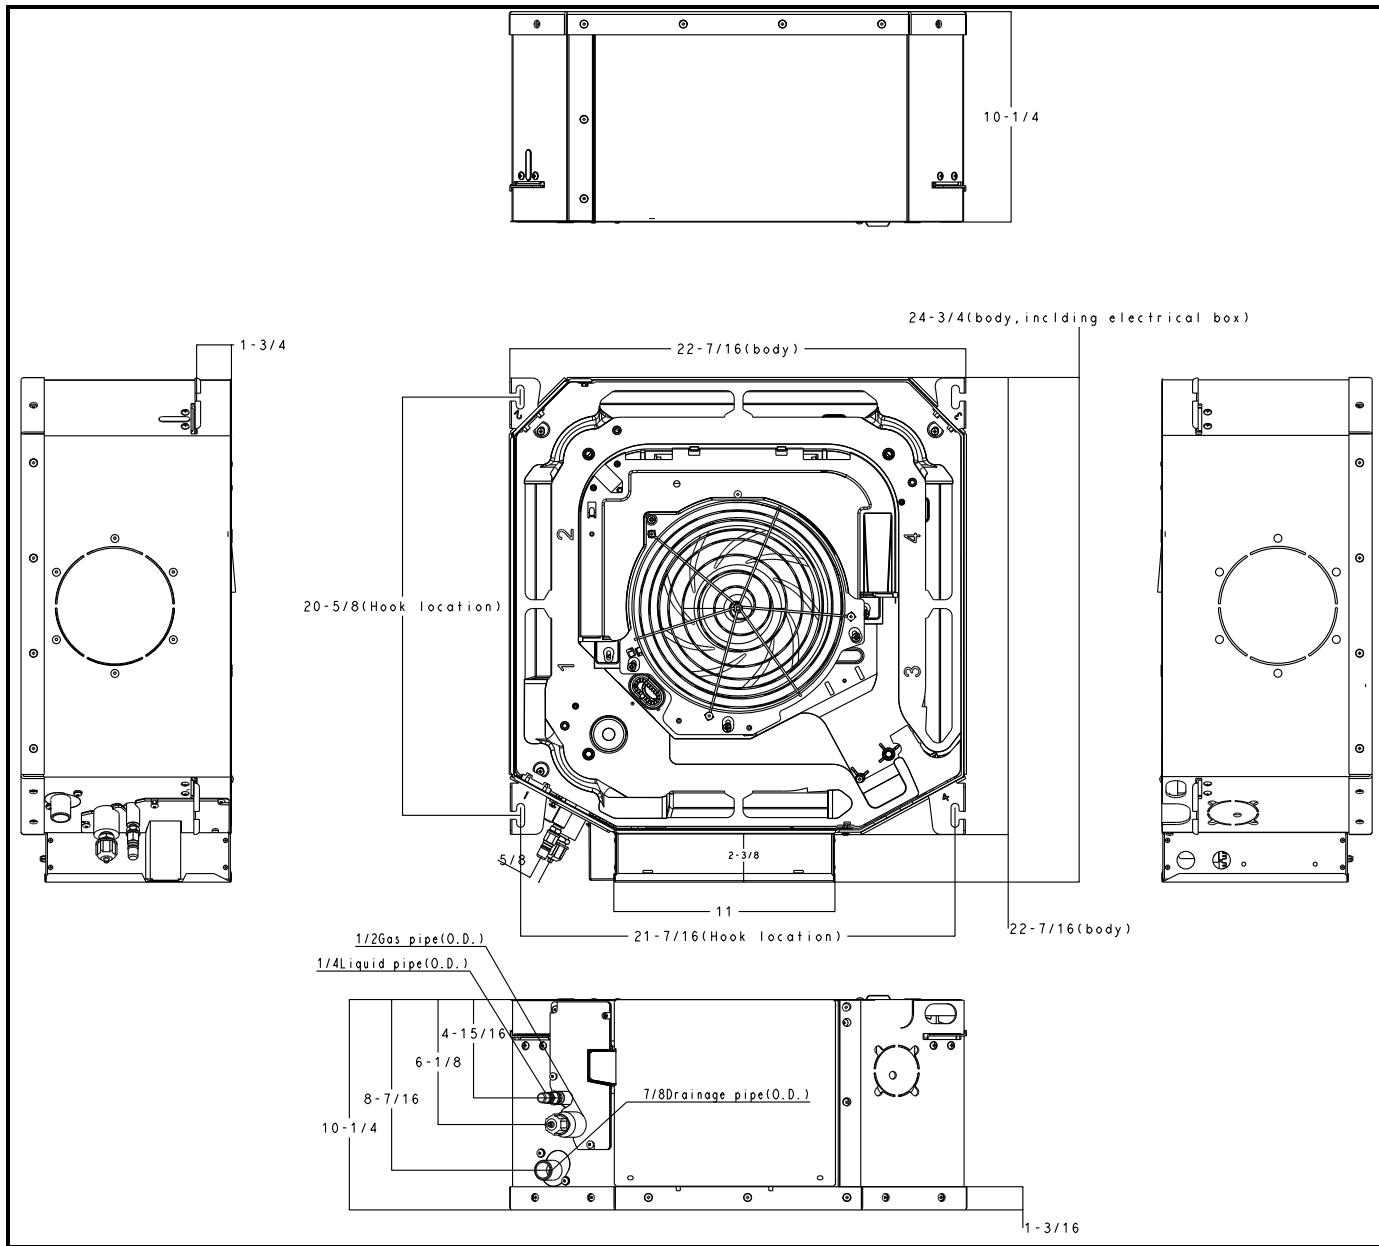



All Dimensions are shown in inches.

**DIMENSIONAL DRAWING
INDOOR UNIT COMPACT 4-WAY CASSETTE 40VMC015A--3**

25-1/2 (Panel)


22-7/16 (body)

21-7/16 (Hook-location)

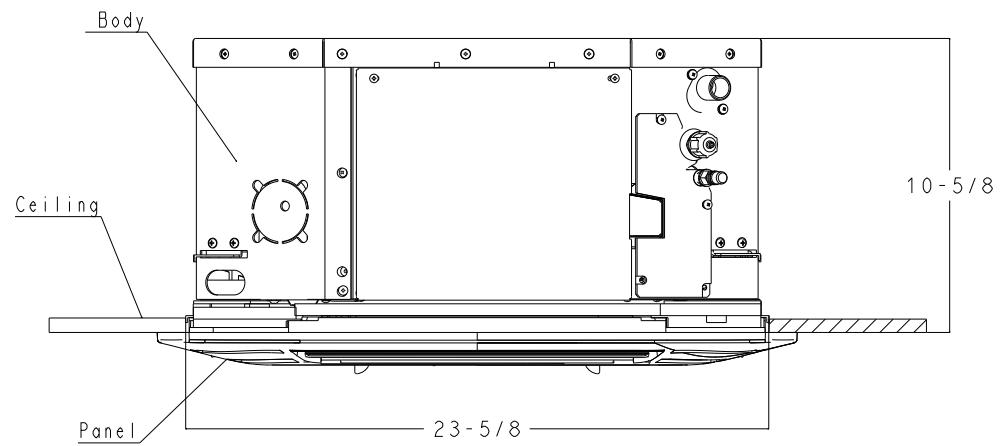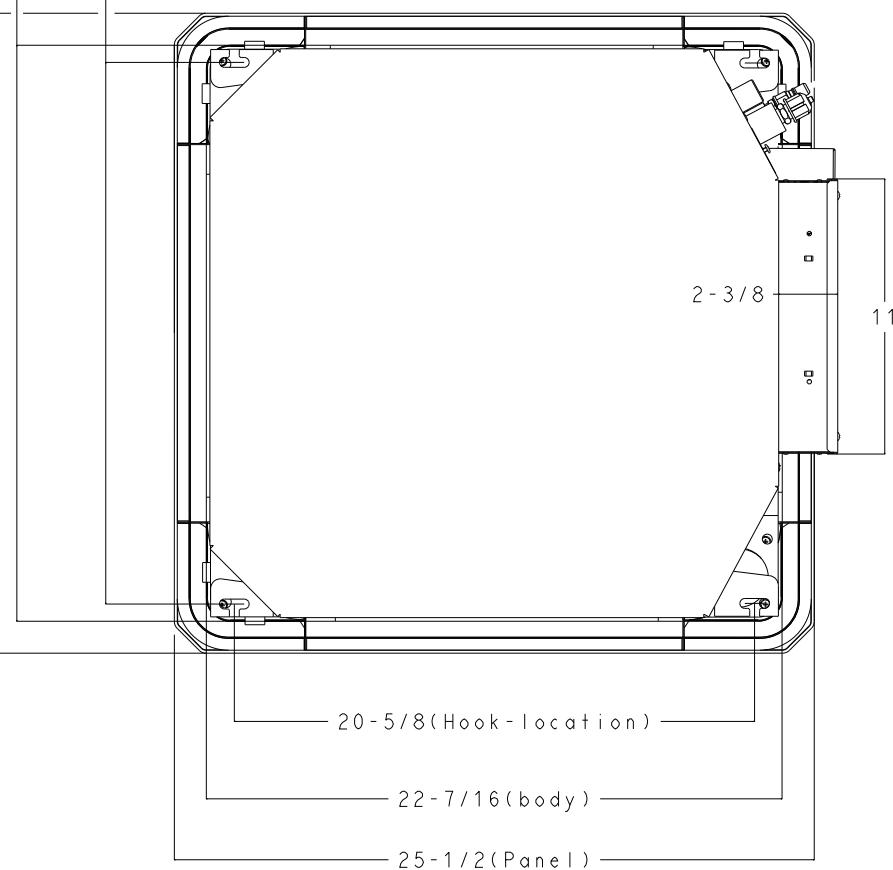


All Dimensions are shown in inches.


RECOMMENDED SERVICE CLEARANCE

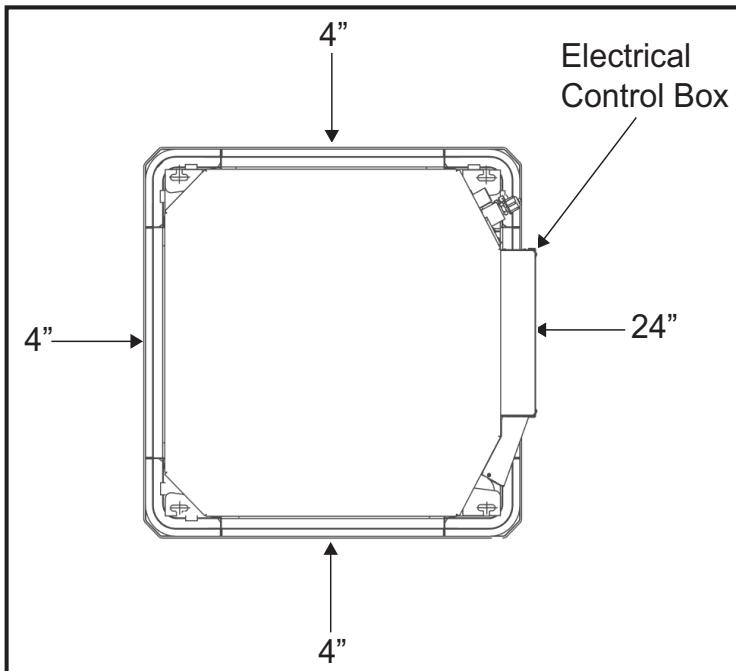


RECOMMENDED AIRFLOW CLEARANCE

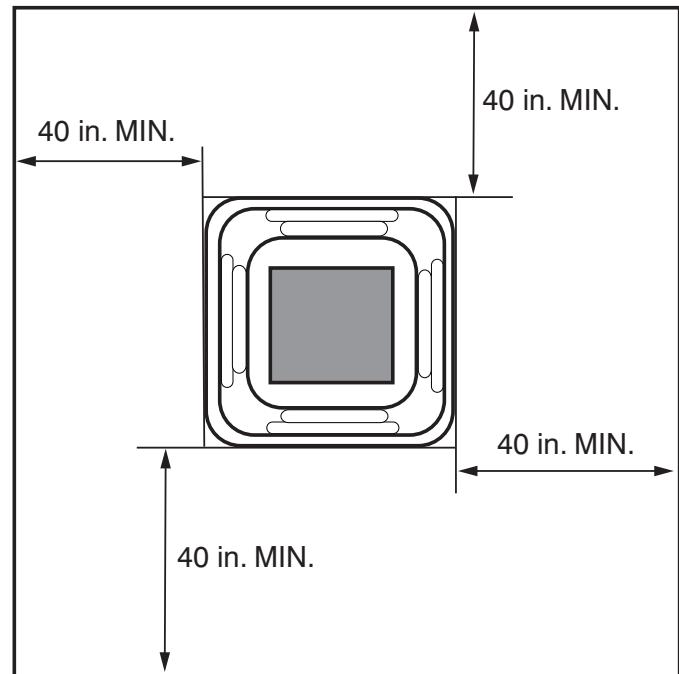

RECOMMENDED CLEARANCE FOR BLOCKING OFF LOUVER / SUPPLY DUCT OPENING

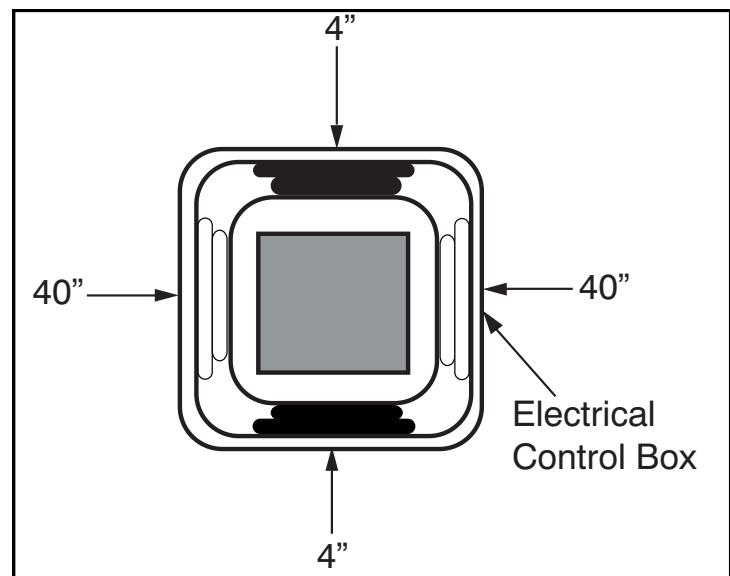

2 Supply Louvers Blocked Off

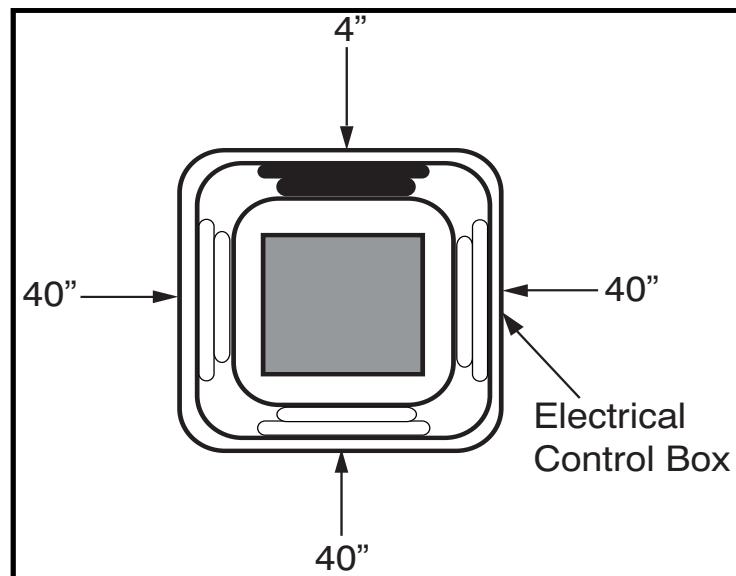

1 Supply Louver Blocked Off



© Carrier Corporation 2020

Printed in U.S.A.

Form 40VMC015A-C-1SD

Pg 4

1-20

Replaces: 40VMC015-C-3SD

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.