


# VRF Indoor Unit 40VMH030---3—High Static Duct



## Submittal Data

Job Name \_\_\_\_\_ Location \_\_\_\_\_  
Tag \_\_\_\_\_

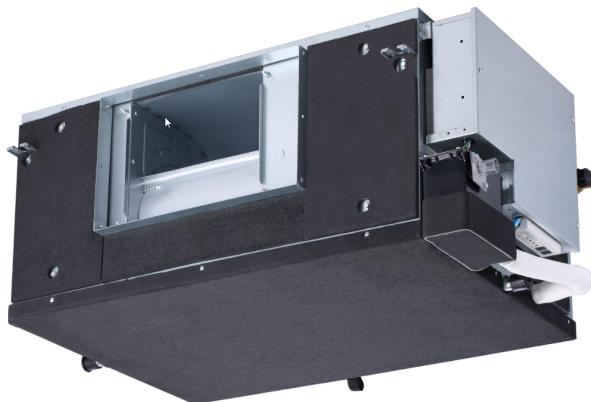

### STANDARD FEATURES

- Ducted Supply and Return Opening
- Three Fan Speeds - High, Medium and Low
- Built in Drain Pump from Factory
- Built in EXV (Electronic Expansion Valve) for Install Ease

INDOOR UNIT MODEL		
<b>PERFORMANCE</b>		
Cooling Rated Capacity	Btu/h	30,420
Sensible Cooling Capacity		20,410
Heating Rated Capacity	Btu/h	34,000
Airflow (H / M / L)	CFM	971 / 753 / 647
Sound Pressure (H / M / L)	dBA	52.0 / 48.1 / 44.2
<b>ELECTRICAL</b>		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	140
Minimum Circuit Amps (MCA)	A	7.1
Maximum Overcurrent Protection	A	15.0
Motor Type		DC


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	1 (OD)
Minimum External Static Pressure (ESP) (Factory Default)	in. wg	0.2
Maximum External Static Pressure (ESP)	in. wg	0.8
Refrigerant		R-410A
Unit Width	in.	37-1/2
Unit Height	in.	16-1/2
Unit Depth	in.	27-3/16
Net Weight	lb	114.6

### ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

**DIMENSIONAL DRAWING  
INDOOR UNIT HIGH STATIC DUCT 40VMH030---3**

Unit: inches (mm)

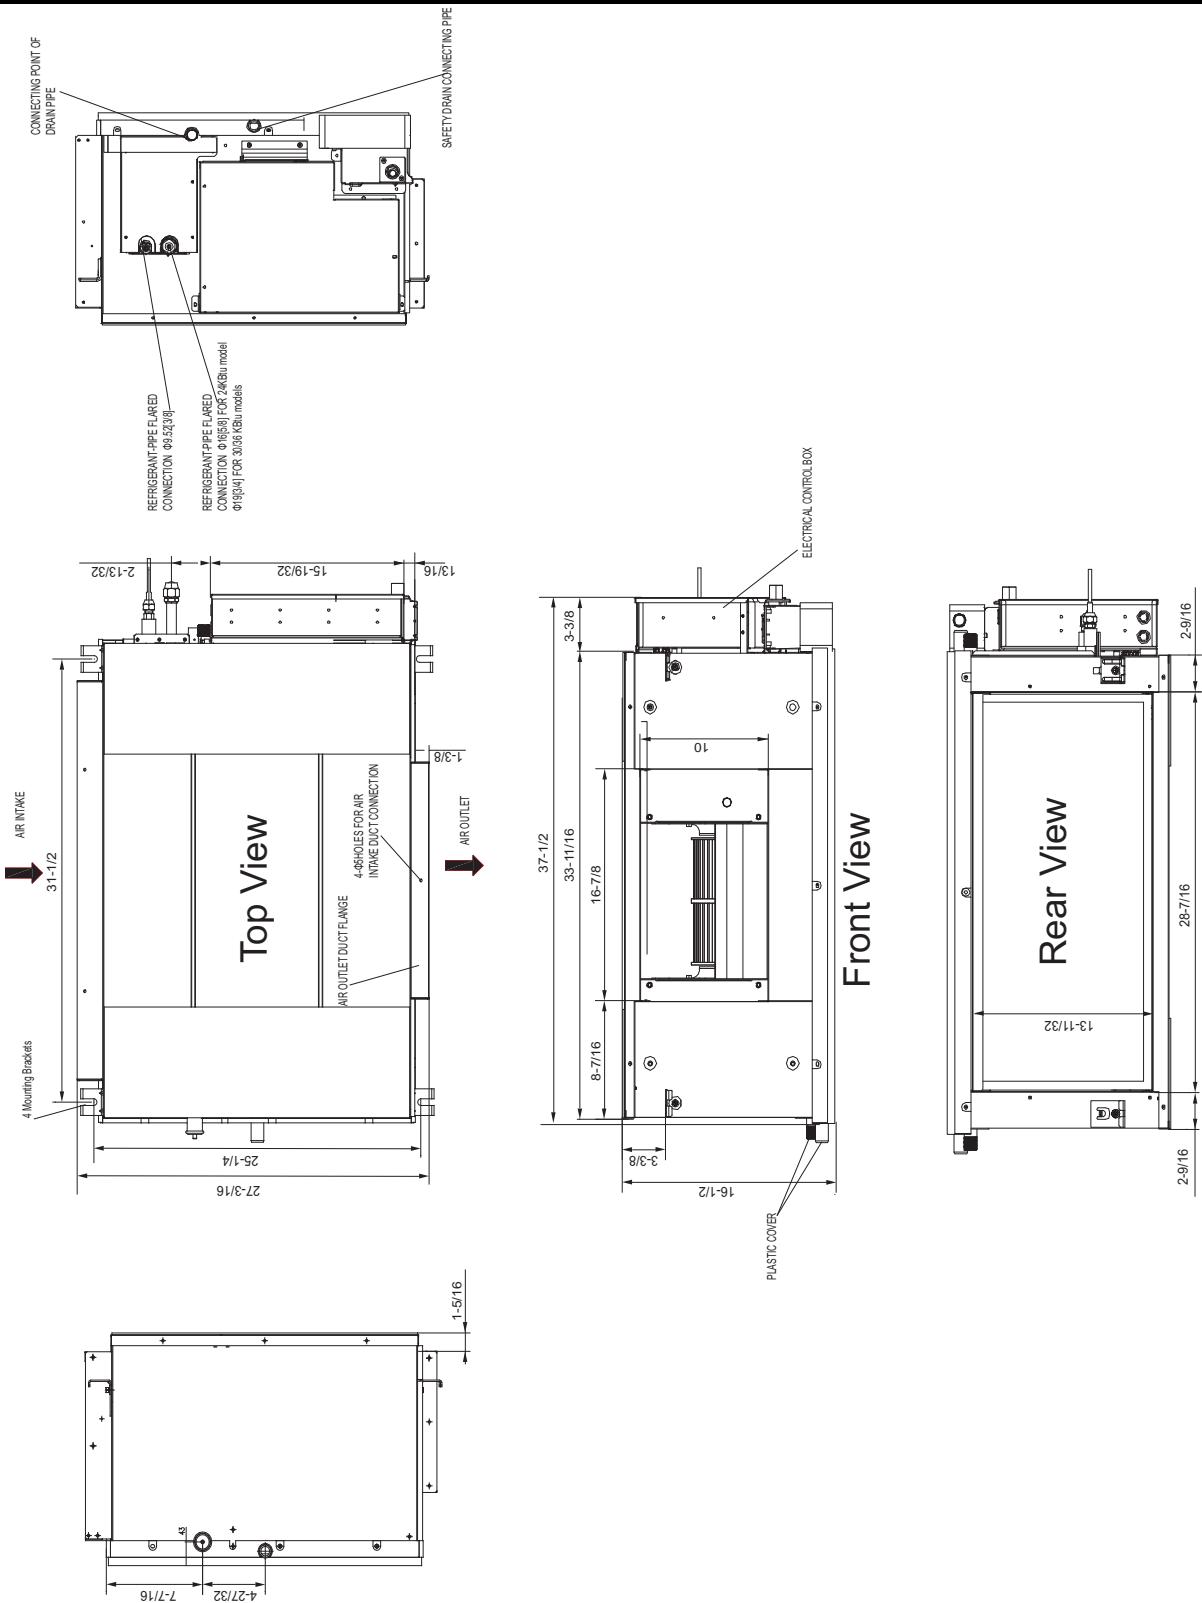

© 2021 Carrier Corporation. All rights reserved.  
A Carrier Company

---

Edition Date: 03/21  
Printed in U.S.A.

**Form No: 40VMH030-C-3SD**

**Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.**