# VRF Indoor Unit
# 40VML012---3—Low Static Duct

bryant®
Heating & Cooling Systems

# Submittal Data

Job Data _____ Location _____
Buyer _____ Buyer PO # _____ Carrier # _____
Unit Number _____ Model Number _____
Performance Data Certified By _____ Date _____



**STANDARD FEATURES**

- Rear Return Air Opening is Standard and Bottom Return is Optional
- Three Fan Speeds - High, Medium, and Low
- Knockout for Outside Air
- Built-in Drain Pump from Factory
- Built in EXV (Electronic Expansion Valve) for Installation Ease


| INDOOR UNIT MODEL | | 40VML012---3 |
|---|---|---|
| PERFORMANCE | | |
| Cooling Rated Capacity | Btu/h | 12,000 |
| Heating Rated Capacity | Btu/h | 13,500 |
| Airflow (H / M / L) | CFM | 353 / 294 / 236 |
| Sound Pressure (H / M / L) | dBA | 37 / 34.6 / 33 |
| ELECTRICAL | | |
| Power Supply | V/Ph/Hz | 208-230/1/60 |
| Power Consumption (Input) | W | 32 |
| Minimum Circuit Amps (MCA) | A | 0.6 |
| Maximum Overcurrent Protection | A | 15.0 |
| Motor Type | | DC |

| PHYSICAL DATA | | |
|---|---|---|
| Pipe Connection Size - Liquid | in. | 1/4 (OD) |
| Pipe Connection Size - Suction | in. | 1/2 (OD) |
| Pipe Connection Size - Drain | in. | 1 (OD) |
| Refrigerant | | R-410A |
| Unit Width | in. | 30-3/4 |
| Unit Height | in. | 8-1/4 |
| Unit Depth | in. | 19-3/4 |
| Net Unit Weight | lb | 41 |


**ACCESSORIES**

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900012
- ☐ Wired Remote Controller - Prog. 40VM900013
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006


# DIMENSIONAL DRAWING
# INDOOR UNIT LOW STATIC DUCT 40VML012---3

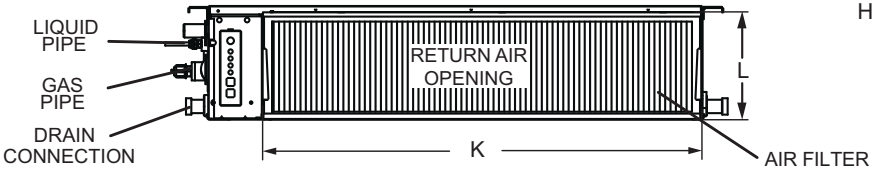



**REAR VIEW**

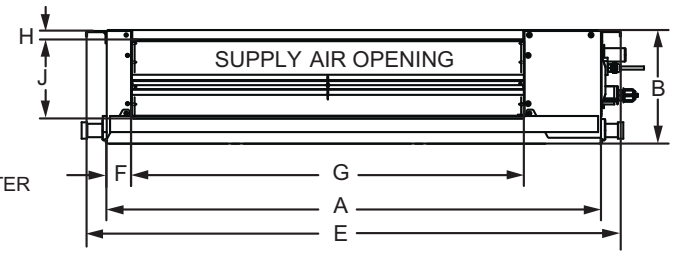



**FRONT VIEW**

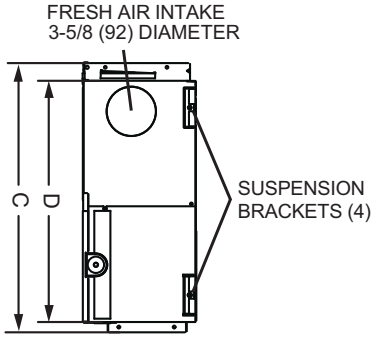


**SIDE VIEW**

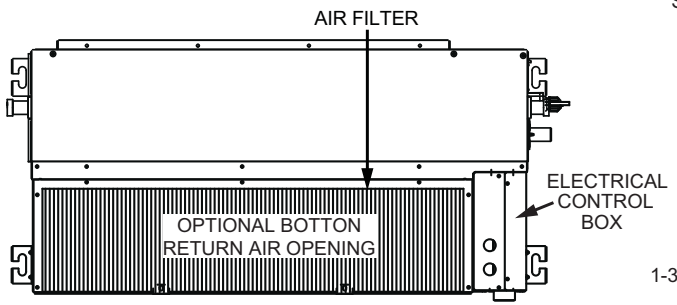


**BOTTOM VIEW**

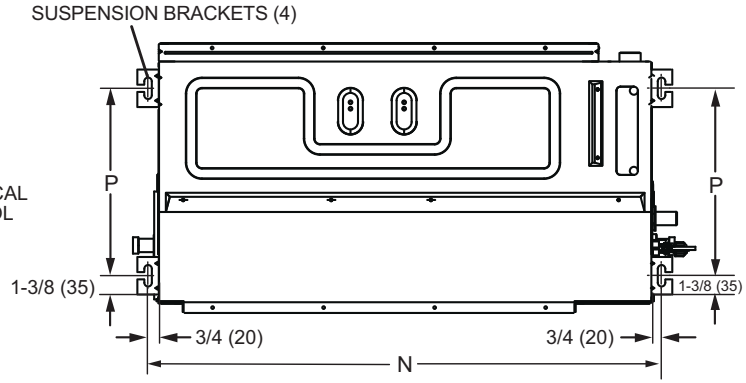


**TOP VIEW**

Note: All dimensions are shown in inches

| 40VML UNIT SIZE | DIMENSION (in.) | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | G | H | J | K | L | N | P |
| 012 | 27 1/2 | 8 1/4 | 19 3/4 | 17 3/4 | 30 3/4 | 1 3/4 | 20 1/8 | 5/8 | 5 3/4 | 23 5/8 | 7 3/4 | 29 1/8 | 13 3/4 |

© Bryant Heating & Cooling Systems 2018