

VRF Indoor Unit 40VMM009---3 — Medium Static Duct



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Rear Return Air Opening is Standard and Bottom Return is optional
- Three Fan Speeds – High, Medium and Low
- Knockout for Outside Air
- Built-in Condensate Lift Mechanism
- Built-in EXV (Electronic Expansion Valve) for Installation

Indoor Unit Model 40VMM009---3

PERFORMANCE

Cooling Rated Capacity	Btu/h	9,000
Heating Rated Capacity	Btu/h	10,000
Airflow (H / M / L)	CFM	340 / 271 / 230
Sound Pressure (H / M / L)	dBA	32.2 / 30.9 / 29.3

ELECTRICAL

Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	50
Minimum Circuit Amps	A	1.25
Maximum Overcurrent Protection	A	15
Motor Type		DC


PHYSICAL DATA

Pipe Connection Size - Liquid	in.	1/4 (OD)
Pipe Connection Size - Suction	in.	1/2 (OD)
Pipe Connection Size - Drain	in.	1 (OD)
Maximum External Static Pressure (ESP)	in. wg	0.32
Refrigerant		R-410A
Unit Width	in.	39-1/4
Unit Height	in.	8-1/4
Unit Depth	in.	19-3/4
Unit Net Weight	lbs.	48.5

ACCESSORIES (Optional)

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Centralized Controller 40VM900004
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

DIMENSIONAL DRAWING
INDOOR UNIT MEDIUM STATIC DUCT 40VMM009--3

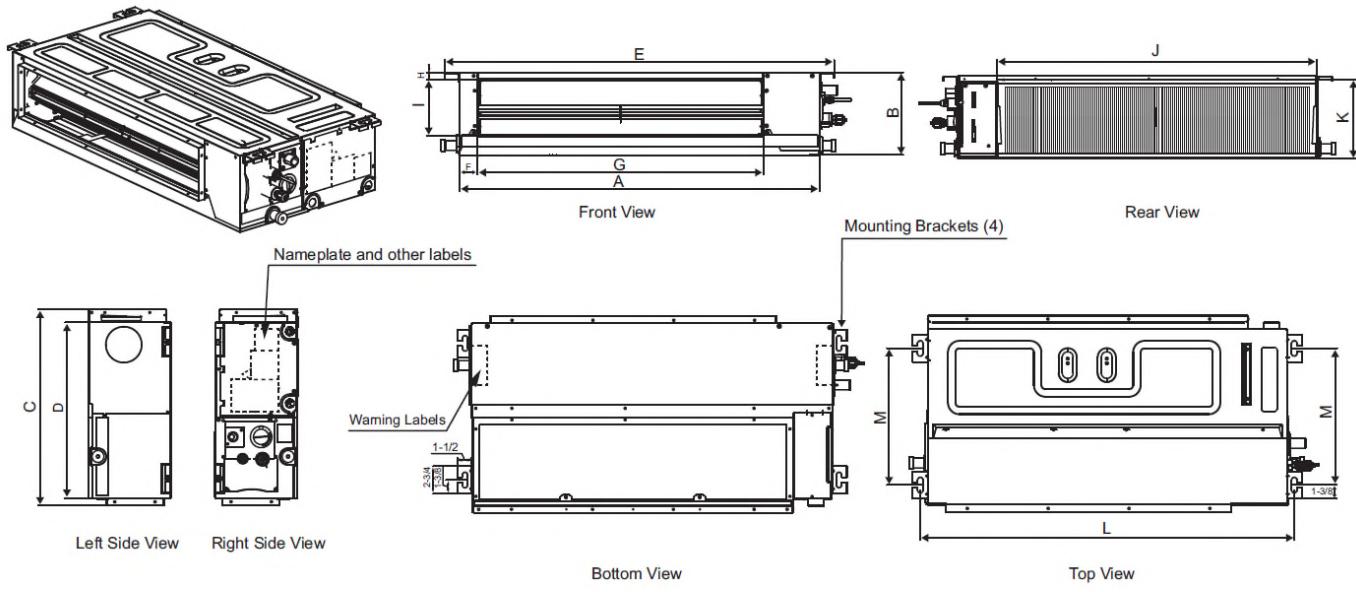

40VMM UNIT SIZE	DIMENSION (in.)												
	A	B	C	D	E	F	G	H	I	J	K	L	M
009	36-1/4	8-1/4	19-3/4	17-3/4	39-1/4	1-3/4	28-3/4	5/8	5-3/4	32-1/4	7-7/8	37-3/4	13-3/4

NOTE: All dimensions shown in inches.

