

VRF Indoor Unit 40VMM048A--3—Medium Static Duct



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Rear Return Air Opening is Standard and Bottom Return is Optional
- Three Fan Speeds - High, Medium, and Low
- Knockout for Outside Air
- Built-in Condensate Lift Mechanism
- Built in EXV (Electronic Expansion Valve) for Installation


INDOOR UNIT MODEL		40VMM048A-3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	48,000
Heating Rated Capacity	Btu/h	54,000
Airflow (H / M / L)	CFM	1370 / 1100 / 980
Sound Pressure (H / M / L)	dBA	48.0 / 43.8 / 41.2
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	370
Minimum Circuit Amps (MCA)	A	5.0
Maximum Overcurrent Protection	A	15
Motor Type		DC

PHYSICAL DATA			
Pipe Connection Size - Liquid	in.	3/8 (OD)	
Pipe Connection Size - Suction	in.	5/8 (OD)	
Pipe Connection Size - Drain	in.	3/4 NPT	
Maximum External Static Pressure (ESP)	in. wg	0.6	
Refrigerant		R-410A	
Unit Width	in.	50-3/4	
Unit Height	in.	11-7/8	
Unit Depth	in.	34-1/8	
Net Unit Weight	lb	124	

ACCESSORIES

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

DIMENSIONAL DRAWING
INDOOR UNIT MEDIUM STATIC DUCT 40VMM048A--3

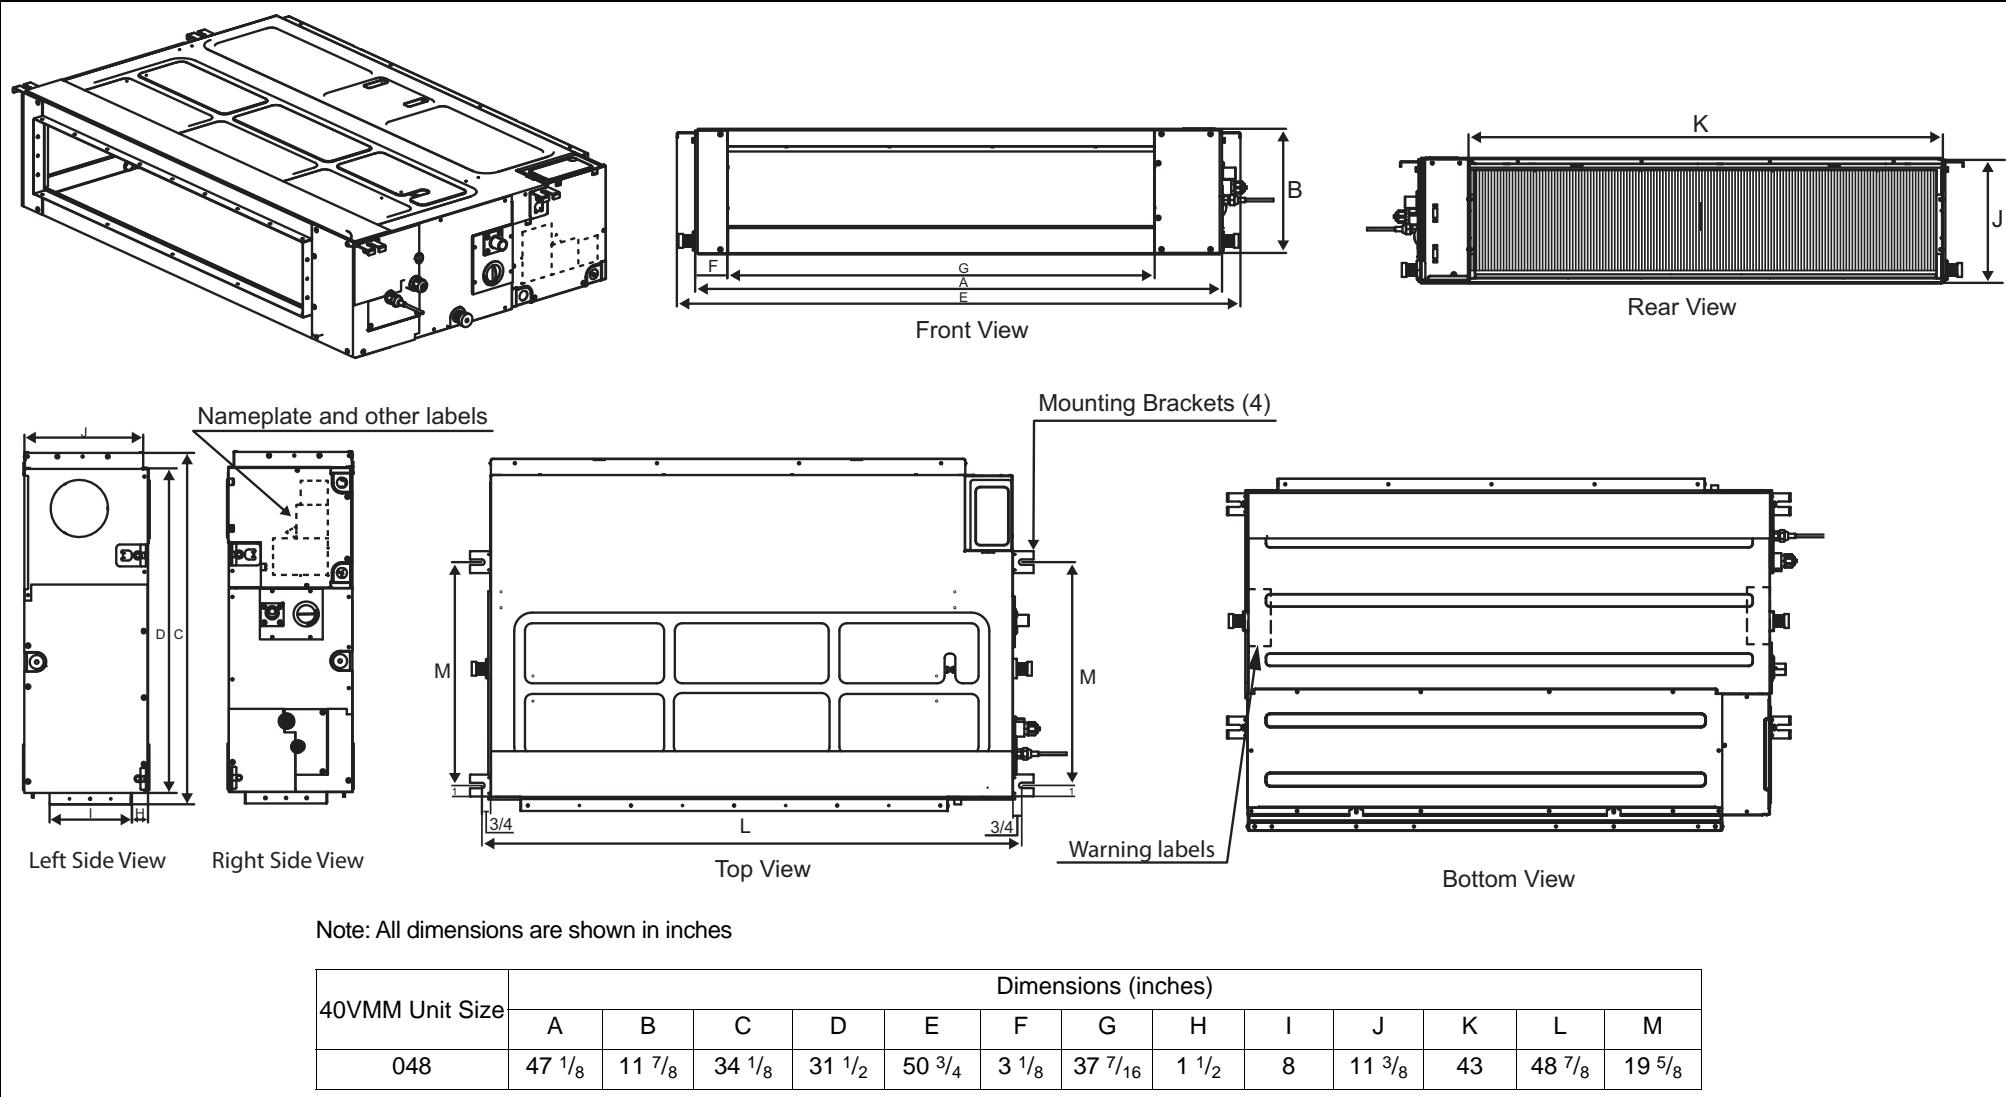

© Carrier Corporation 2018