

**VRF Indoor Unit
40VMW024---3 — High Wall**



Submittal Data

Job Name _____ Location _____
Tag _____



STANDARD FEATURES

- Dual Guided Air Design Provides Smoother and More Comfortable Air Flow
- Three Fan Speeds - High, Medium and Low
- Front Panel Lifts Up 65 Degrees Providing Ease of Maintenance
- Heating Mode, Swing Angle for Louver is 68 to 110 Degrees in Auto Mode
- Non-Heating Mode, Swing Angle for Louver is 61 to 93 Degrees in Auto Mode
- Manual Setting for Louver, Swing Angle Between 61 and 110 Degrees
- Multi-Refrigerant Outlet Piping Methods - Left, Right or Rear
- Built in EXV (Electronic Expansion Valve) for Installation Ease


Indoor Unit Model	40VMW024---3	
PERFORMANCE		
Total Cooling Rated Capacity	Btu/h	24,340
Sensible Cooling Capacity	Btu/h	15,330
Total Heating Rated Capacity	Btu/h	27,000
Airflow (H / M / L)	CFM	650 / 530 / 460
Sound Pressure (H / M / L)	dBA	43.2 / 42.0 / 36.8
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	75
Minimum Circuit Amps	A	0.86
Maximum Overcurrent Protection	A	15
Motor Type		DC

PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	3/4 NPT (OD)
Refrigerant		R-410A
Unit Width	in.	47
Unit Height	in.	13-1/2
Unit Depth	in.	10-1/8
Unit Net Weight	lb	38


ACCESSORIES (Optional)

- Wireless Remote Controller 40VM900001
- Wired Remote Controller - Non-Prog. 40VM900002
- Wired Remote Controller - Prog. 40VM900003
- Touch Screen Wired Controller 40VM900005
- Touch Screen Central Controller 40VM900006

DIMENSIONAL DRAWING
INDOOR UNIT HIGH WALL 40VMW024---3

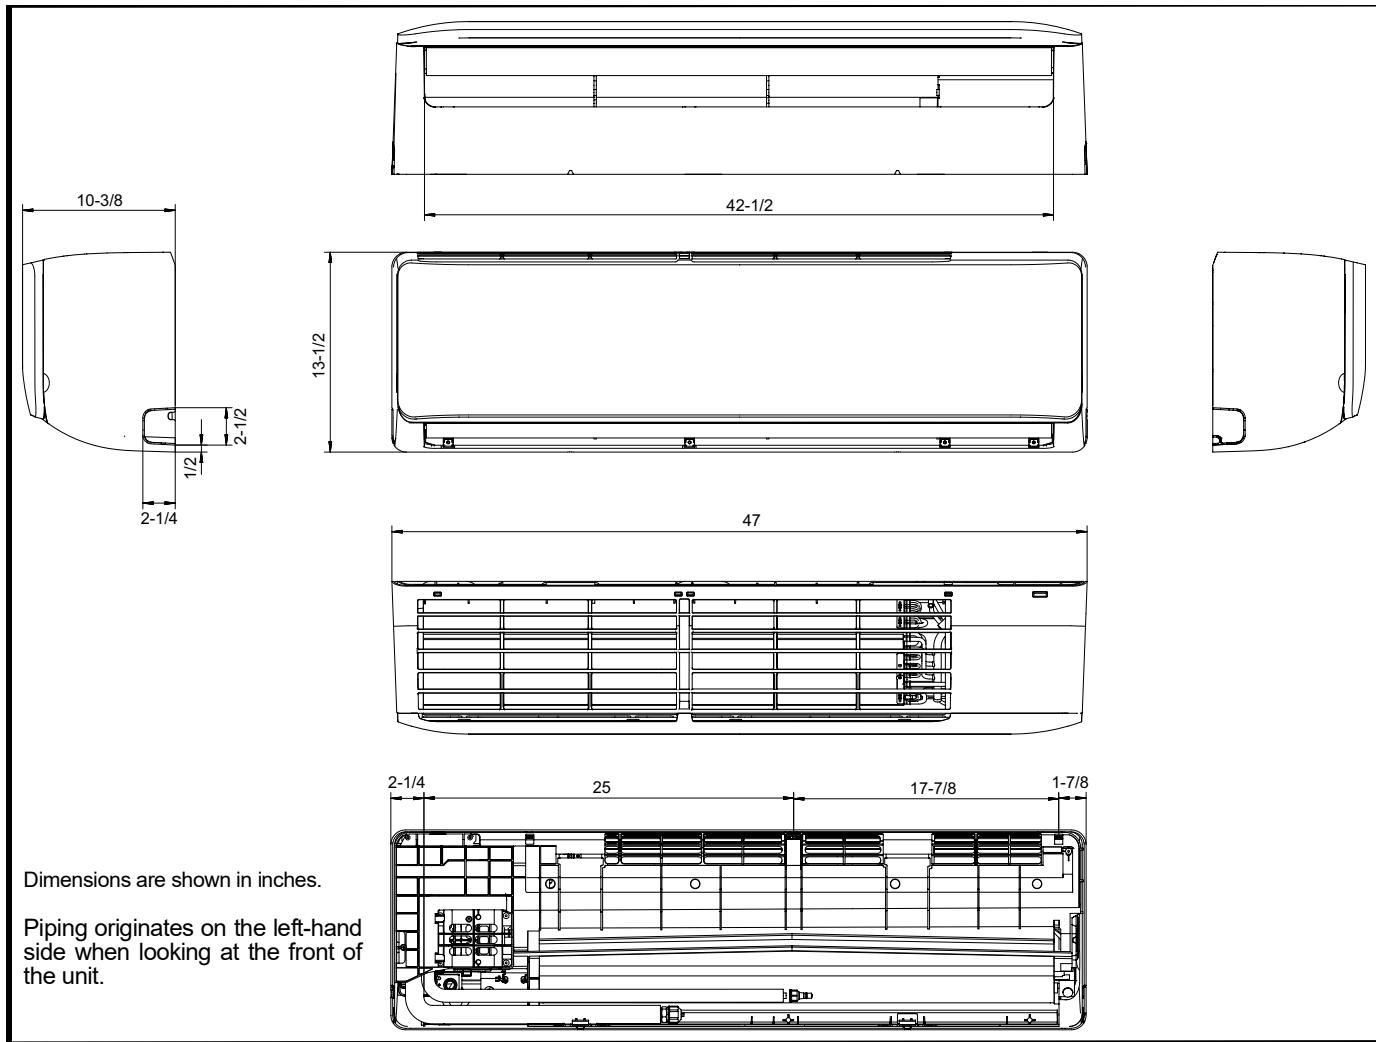

MOUNTING PLATE
INDOOR UNIT HIGH WALL 40VMW024---3

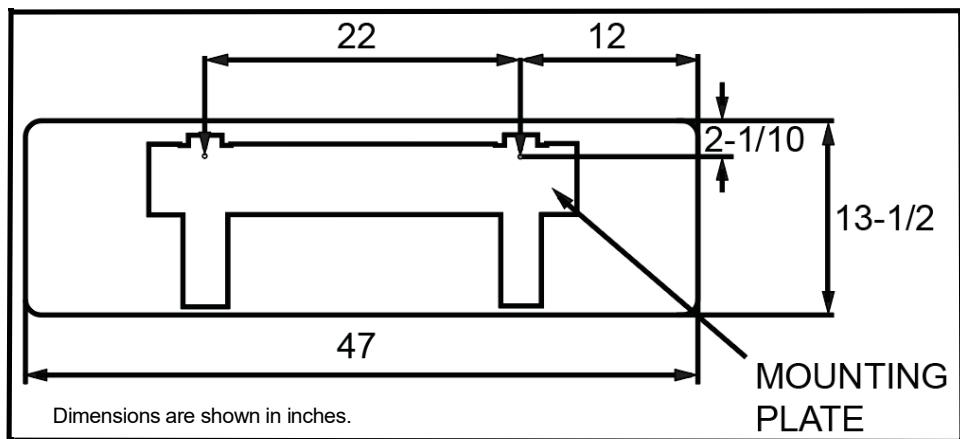

© Carrier Corporation 2020

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.
 Printed in U.S.A. Form 40VMW024-C-4SD Pg 2 07-20 Replaces: 40VMW024-C-3SD