

SMMSu VRF u-Series Outdoor Unit MMY-UP2161HT6P-UL—Heat Pump

TOSHIBA Carrier

Submittal Data

Job Name _____ Location _____

Tag _____



A230331

SMMSu VRF Heat Pump Features

- Energy-efficient priority design
- Super-efficient heat exchanger
- Refrigerant cooling inverter system
- Intelligent VRF control
- Less refrigerant
- Space efficient design
- Configuration flexibility
- Wider Operating temperature range
- Comprehensive System construction solution
- Comprehensive Service solution

Header Unit Model	MMY-UP2161HT6P-UL
Outdoor Unit Model Name	MUP1441HT6P-UL + MUP0721HT6P-UL

PERFORMANCE		
Nominal Cooling Capacity†	Btu/h	216,000
Nominal Heating Capacity†	Btu/h	243,000
Maximum number of indoor units		38
Total Connected Indoor Unit Capacity		324

COOLING EFFICIENCY†		
EER (Non-Ducted)	Btu/Wh	10.90
Power Consumption (Non-Ducted)	kW	18.50
EER (Ducted)		11.60
Power Consumption (Ducted)		16.00

HEATING EFFICIENCY†		
COP (Non-Ducted)	Btu/Wh	4.04
Power Consumption (Non-Ducted)	kW	16.39
COP (Ducted)		4.01
Power Consumption (Ducted)	kW	15.20

FAN		
Fan Type		Propeller
Airflow	CFM	8650 + 5650
Motor Output	kW	0.43 x 2 + 0.43 x 1

ELECTRICAL		
Power Supply	V/Ph/Hz	460/3/60
MCA	A	24.6 + 17.4
MOCP	A	35.0 + 20.0

COMPRESSORS

Type (Number)	Hermetic Twin Rotary (1) +	
	Hermetic Twin Rotary (1)	
Motor Output	kW	9.69 + 4.05

PHYSICAL DATA

Pipe Connection Size - Liquid (High Pressure)	in.	5/8 (Braze)	1/2 (Braze)
Pipe Connection Size - Gas (Low Pressure)	in.	1-1/8 (Braze)	3/4 (Braze)
Refrigerant	R-410A		
Factory Charge††	lb	19.8 + 13.2	
External Finish	Munsell 1Y8.5/0.5		
Unit Width	in.	51.4 + 39.6	
Unit Height	in.	66.5 + 66.5	
Unit Depth	in.	31.1 + 31.1	
Unit Net Weight	lb	721 + 533	

LEGEND

EER	—	Energy Efficiency Ratio
COP	—	Coefficient of Performance
MCA	—	Minimum Circuit Amps
MOCP	—	Maximum Overcurrent Protection



†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db

Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

††Additional charge required.

OUTDOOR UNIT HEAT PUMP MMY-UP2161HT6P-UL DIMENSIONAL DRAWING

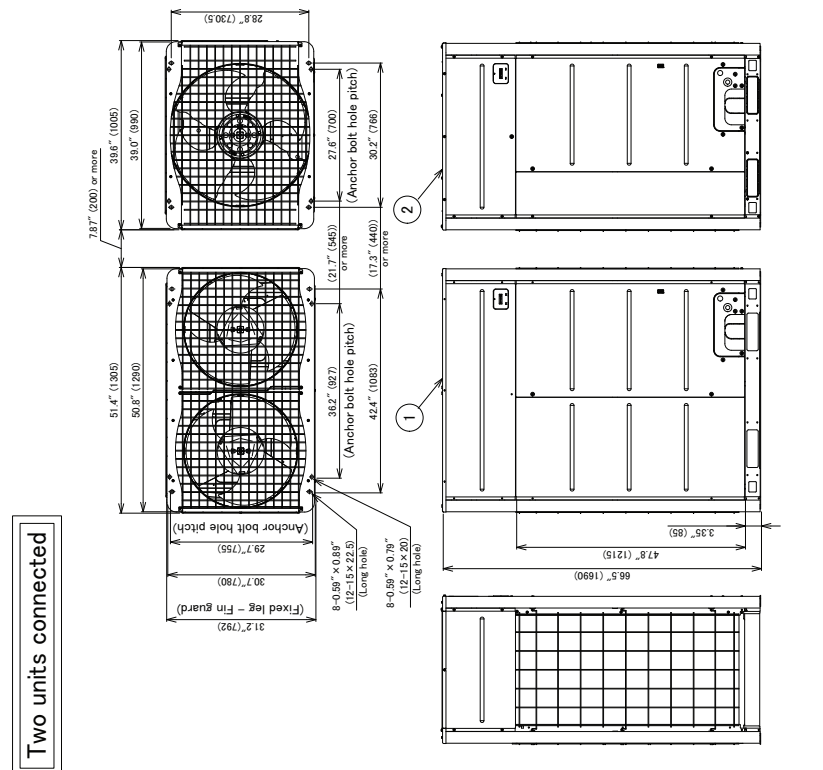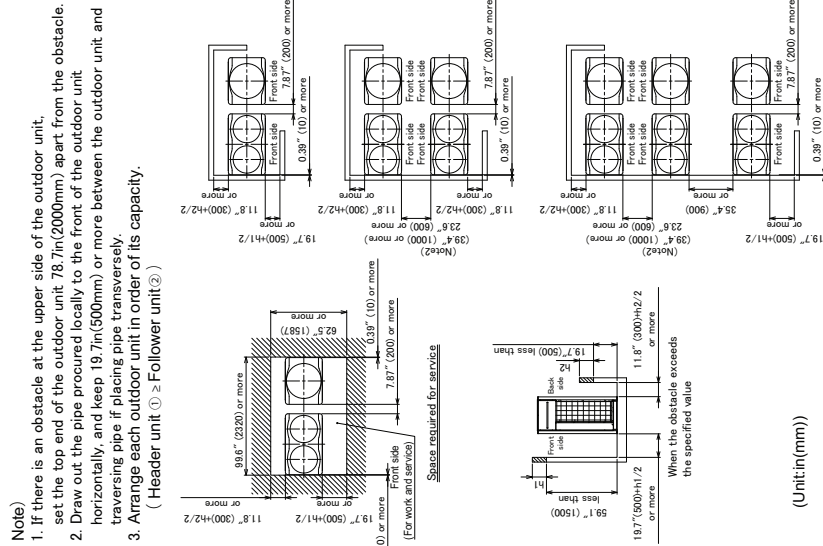

A23034