


Submittal Data

Job Name _____

Location _____

Tag _____

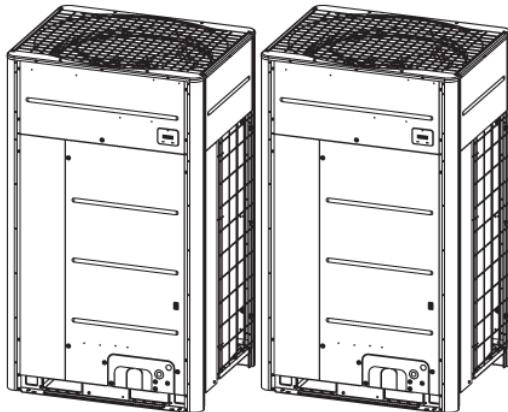

A210612

Heat Recovery Features

- Modules and pairings available from 6 to 42 tons
- Modules have inverter-driven rotary compressors
- Direct-drive, inverter-driven outdoor motor
- Up to 3937 ft actual total system piping (liquid line)
- 656 ft (200 m) actual piping length from outdoor unit to furthest fan coil
- Operating temperature range
Cooling (db): -10° to 125°F
(-15° to 52°C)
Heating (wb): -22° to 60°F
(-25° to 18°C)
- Protection: high pressure sensor and switch, low pressure sensor and switch, process controller board fuse, inverter overload protection
- 7-year compressor limited warranty
- 5-year parts limited warranty

Combination Model	MMY-UP3361FT9P-UL			ELECTRICAL					
Header Unit Model	MUP1681FT9P-UL			Power Supply	V/Ph/Hz	208-230/3/60			
Follower Unit Model	MUP1681FT9P-UL			Minimum Circuit Amps (MCA)	A	57.4 x 2			
PERFORMANCE						Maximum Overcurrent Protection (MOCP)			
Nominal Cooling Capacity	Btu/h	336,000	A			80 + 80			
Nominal Heating Capacity	Btu/h	378,000	COMPRESSORS						
Maximum Number of Indoor Units		60	Type (Number)			Hermetic Triple x 2			
SIMULTANEOUS COOLING AND HEATING EFFICIENCY†						FAN MOTOR			
SCHE, Ducted FCUs		28.00	Motor Output	kW	0.48 x 4				
SCHE, Ductless FCUs		29.00	PHYSICAL DATA						
COOLING EFFICIENCY†						Pipe Connection Size - Liquid (High Pressure)			
EER/IEER, Ducted FCUs	Btu/Wh	10.5/20.3	in.			5/8 + 5/8 (Brazed)			
Power Consumption, Ducted FCUs	kW	27.46	Pipe Connection Size - Gas (Low Pressure)			in.			
EER/IEER, Ductless FCUs	Btu/Wh	10.6/21.4	1-1/8 + 1-1/8 (Brazed)						
Power Consumption, Ductless FCUs	kW	29.38	Discharge - Gas (High/Low Pressure)			7/8 x 2 (Brazed)			
HEATING EFFICIENCY†						Refrigerant			
COP at 47°F, Ducted FCUs		3.24	R-410A						
Power Consumption, Ducted FCUs	kW	29.55	Factory Charge††			lb			
COP at 47°F, Ductless FCUs		3.57	19.8 + 19.8						
Power Consumption, Ductless FCUs	kW	28.74	Unit Width			in.			
Fan Type (Qty)		Propeller (4)	51-1/2 x 2						
Airflow, Standard Range	CFM	8476 x 2	Unit Height			in.			
Sound Pressure	dBA	66.0	66-1/2 x 2						
External Static Pressure*	in. wg	0.321	Unit Depth			in.			
Unit Depth						31-1/4 x 2			
Net Weight						lb			
783 x 2									

†Rated per AHRI (Air-Conditioning, Heating and Refrigeration Institute) 1230 Standard.

Cooling: Indoor 80°F (27°C) db/67°F (20°C) wb; Outdoor 95°F (35°C) db
Heating: Indoor 70°F (21°C) db; Outdoor 47°F (8°C) db/43°F (6°C) wb

*Requires setting by menu functions.

††Additional charge required.


NOTE: Unit cabinet and coil slab shall be capable of withstanding 500-hour salt spray test.

LEGEND

db	— Dry Bulb
COP	— Coefficient of Performance
EER	— Energy Efficiency Ratio
FCU	— Fan Coil Unit
IEER	— Integrated Energy Efficiency Ratio
wb	— Wet Bulb
SCHE	— Simultaneous Cooling and Heating Efficiency

DIMENSIONAL DRAWING OUTDOOR UNIT MMY-UP3361FT9P-UL

Two units connected

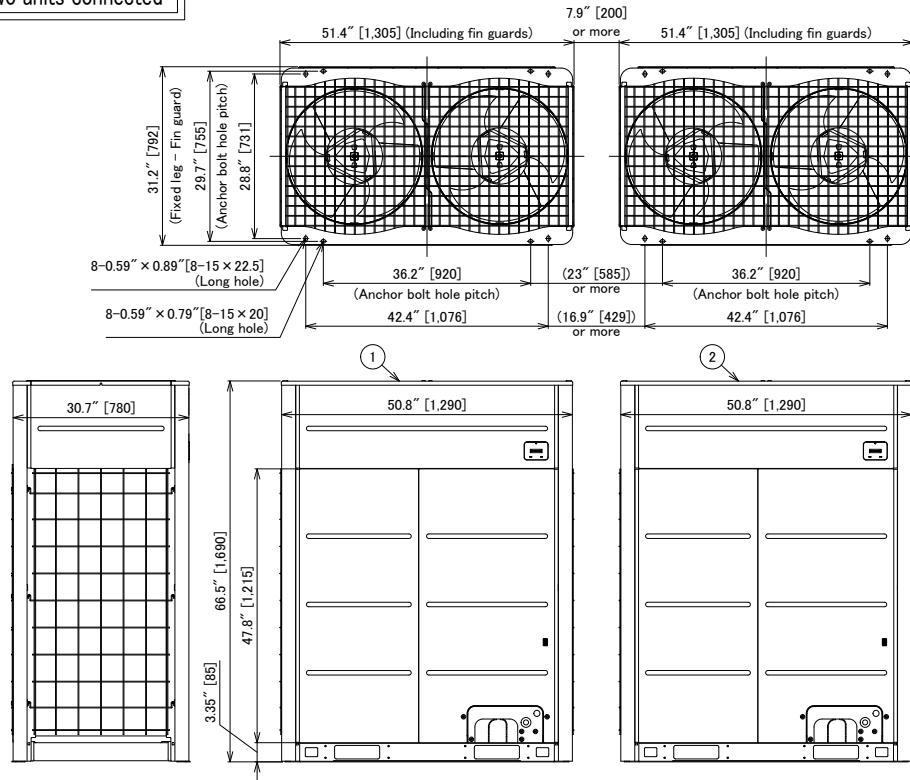

Note)

1. If there is an obstacle at the upper side of the outdoor unit, set the top end of the outdoor unit 78.7in [2000mm] apart from the obstacle.
2. Draw out the pipe procured locally to the front of the outdoor unit horizontally, and keep 19.7in [500mm] or more between the outdoor unit and traversing pipe if placing pipe transversely.
3. Arrange each outdoor unit in order of its capacity.
(Header unit① ≥ Follower unit②)

Model name	Outdopr unit	
	① Header unit	② Follower unit
MMY-UP3361FT9P-UL	MMY-MUP1681FT9P-UL	MMY-MUP1681FT9P-UL

(Unit : in [mm])



© 2024 Carrier. All rights reserved.

Edition Date: 05/24

Printed in U.S.A.

Form No: MMY-UP3361FT9P-UL 02

Replaces: **MMY-UP3361FT9P-UL 01**

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.