

VRF Indoor Unit 40VMU030---3 — Under Ceiling / Floor



Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Convertible Under Ceiling or Floor Installation
- Three Fan Speeds – High, Medium and Low
- Louver Control (Fixed or Swing)
- Knockout for Outside Air
- Built-in IR Receiver and Display Panel
- Built-in EXV (Electronic Expansion Valve) for Installation Ease

Indoor Unit Model		40VMU030---3
PERFORMANCE		
Cooling Rated Capacity	Btu/h	30,000
Heating Rated Capacity	Btu/h	34,000
Airflow (H / M / L)	CFM	729 / 676 / 624
Sound Pressure (H / M / L)	dBA	51.5 / 49.6 / 47.9
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Indoor Fan Motor Power Consumption (Input)	W	107
Minimum Circuit Amps	A	1.40
Maximum Overcurrent Protection	A	15
Motor Type		DC


PHYSICAL DATA		
Pipe Connection Size - Liquid	in.	3/8 (OD)
Pipe Connection Size - Suction	in.	5/8 (OD)
Pipe Connection Size - Drain	in.	5/8 (OD)
Refrigerant		R-410A
Unit Width	in.	50-1/2
Unit Height	in.	26
Unit Depth	in.	8
Unit Net Weight	lbs.	77

ACCESSORIES (Optional)

- ☐ Wireless Remote Controller 40VM900001
- ☐ Wired Remote Controller - Non-Prog. 40VM900002
- ☐ Wired Remote Controller - Prog. 40VM900003
- ☐ Centralized Controller 40VM900004
- ☐ Touch Screen Wired Controller 40VM900005
- ☐ Touch Screen Central Controller 40VM900006

Manufacturer reserves the right to discontinue, or change at any time, specifications or designs without notice and without incurring obligations.

DIMENSIONAL DRAWING INDOOR UNIT UNDER CEILING / FLOOR 40VMU030---3

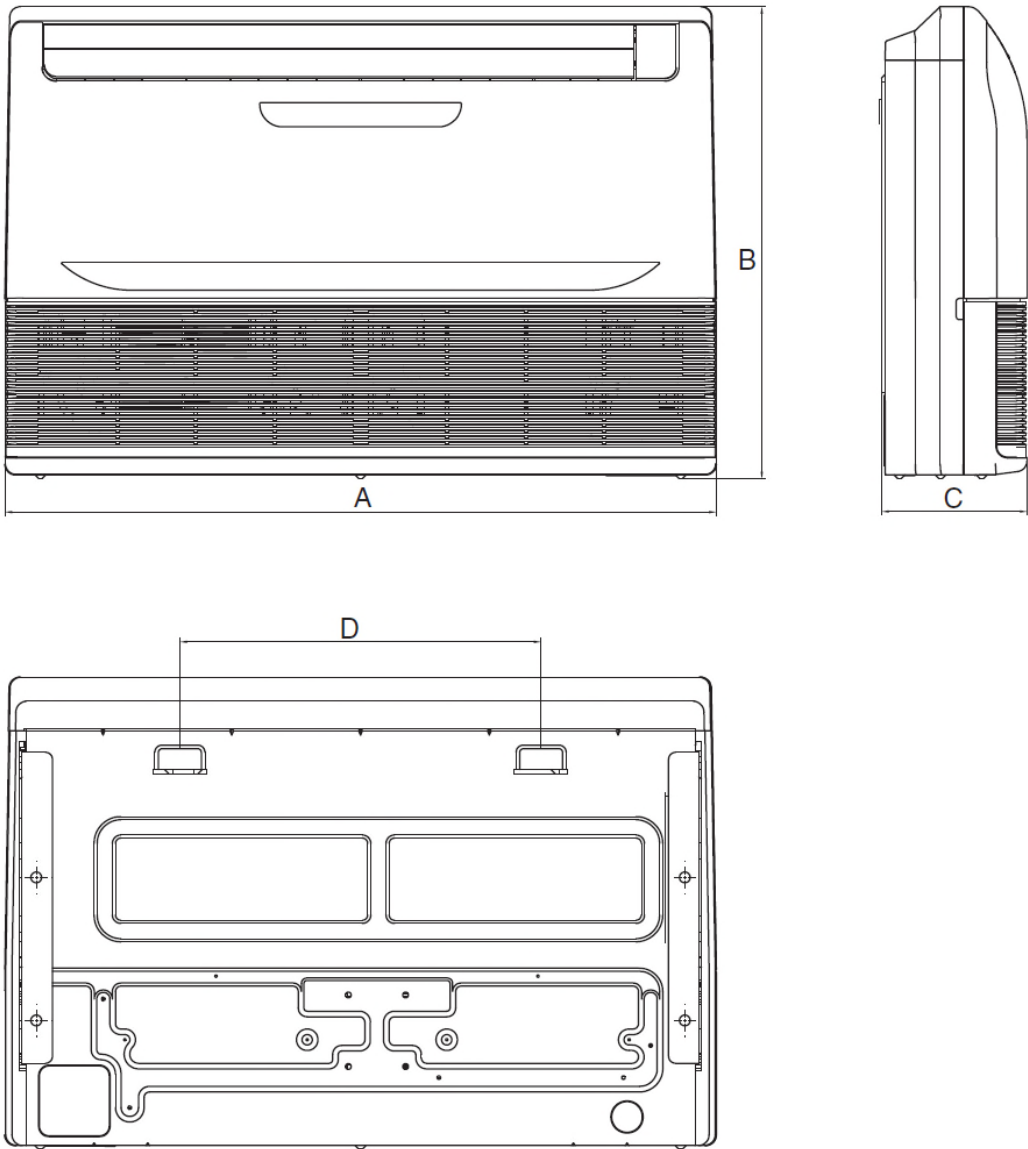

40VMU UNIT SIZE	DIMENSION (in.)			
	A	B	C	D
030	50-1/2	26	8	31-1/4

NOTE: All dimensions shown in inches.

